


**HAMILTON**

# Process Analytics

Measuring Solutions

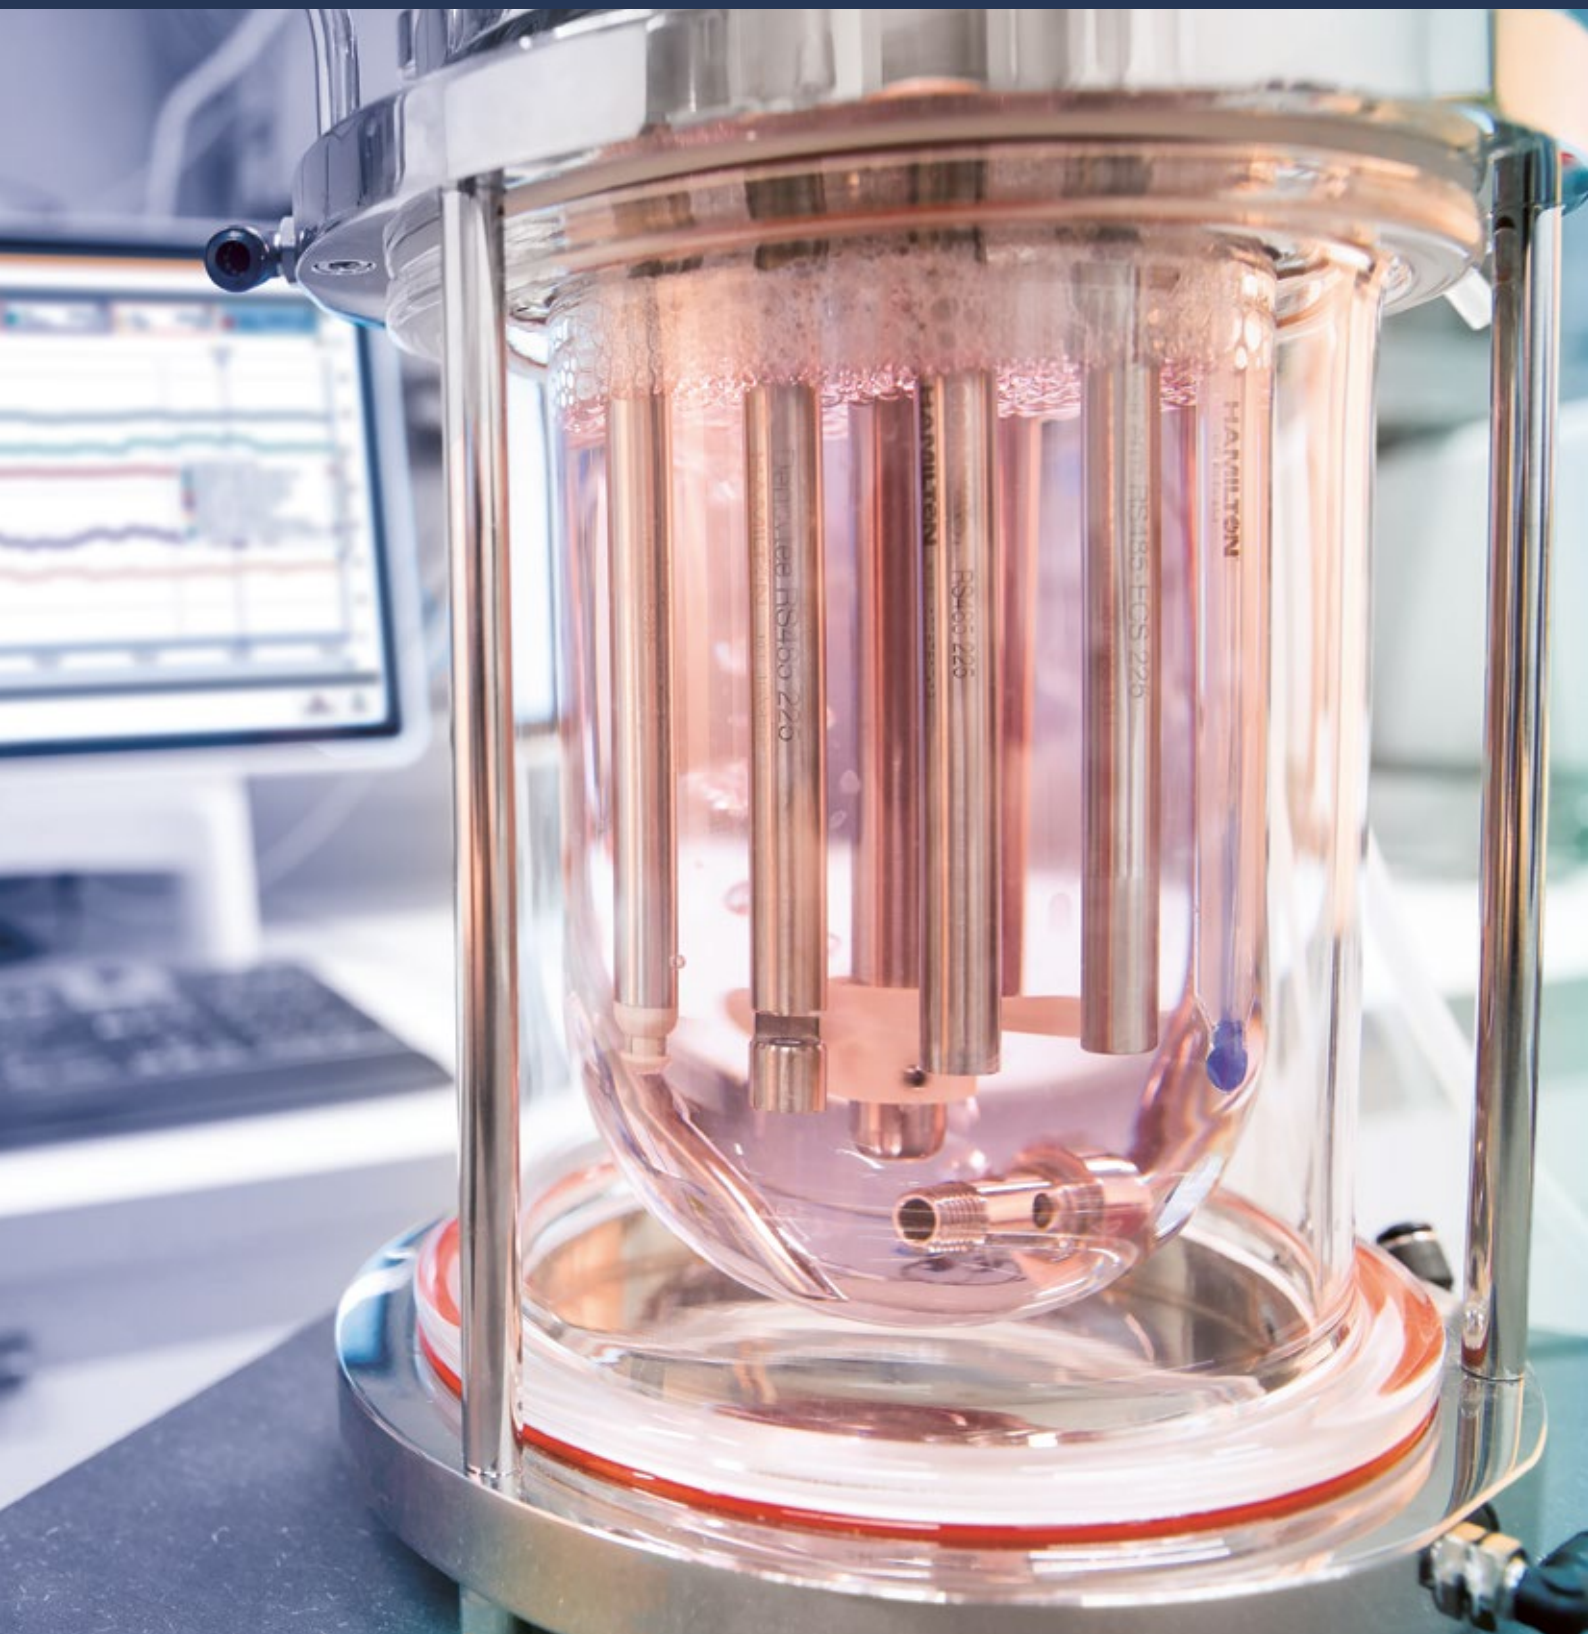

Innovation for a better world

«With our pioneering  
sensor technology, we  
solve bioprocess and  
biopharma challenges.»



The world of Process Analytics  
Learn more on our website

- Knowledge Base
- Latest Innovations & Software Updates
- Manuals & Specifications
- Application Notes
- Quality & Regulatory Certificates


[hamiltoncompany.com/process-analytics](https://hamiltoncompany.com/process-analytics)



Keep yourself updated  
Follow us on the LinkedIn channel


[linkedin.com/showcase/hamilton-process-analytics](https://linkedin.com/showcase/hamilton-process-analytics)

# Content




Innovations


Page 06  
CO<sub>2</sub>NTROL



Page 04  
Cell Density



Page 05  
Single Use Sensors



Page 11  
VisiFerm RS485

|                         |     |                     |     |
|-------------------------|-----|---------------------|-----|
| Innovations             | 4   | Connectivity        | 104 |
| System installations    | 14  | Cables              | 106 |
| pH Sensors              | 17  | Arc Accessories     | 115 |
| ORP Sensors             | 39  | Converters          | 116 |
| DuraCal pH Buffers      | 52  | Customized Products | 117 |
| Conductivity Sensors    | 55  | Transmitter         | 118 |
| Conductivity Standards  | 66  | Housings            | 123 |
| Cell Density Sensors    | 69  | Services            | 164 |
| CO <sub>2</sub> Sensors | 77  | Sensor Comparison   | 166 |
| DO Sensors              | 81  | Safety First        | 168 |
| Accessories             | 102 | Index               | 170 |
| Membrane Kit FDA        | 102 |                     |     |



# Highlights

## Cell Density

### On-Line Data Real-Time Decisions

On-line monitoring of cell density provides the continuous information necessary to optimize control and yield beyond what is possible off-line. Clear, instantly available information ensures critical process events that could have been missed between off-line samples are now immediately recognizable. Hamilton offers sensors for both viable and total cell density measurement.

#### Measure Viable Cell Density with Incyte Arc

Permittivity measurements are the most reliable method of monitoring Viable Cell Density (VCD). This measurement is immediately affected by changes in Viable Cell Density and can be used to time process-specific actions for maximum yield. Permittivity can also be used to detect changes in cell physiology and is the most immediate method for determining the beginning of the cell death phase.

#### Next Generation Total Cell Density Measurement with Dencytee Arc

With the Dencytee Arc sensor, Hamilton now offers a new generation of in-line total cell density biomass measurement. We have taken the measurement technology to the next level and combined the advantages of transmission and reflection measurement. By upgrading to two detectors, higher measurement resolution can be achieved. This results in higher reliability that can be used in both low and high cell concentrations.



## Single-Use

### One Vendor All Measurements

Hamilton has worked closely with single-use (SU) equipment manufacturers to understand the market needs in order to adapt measurement technologies from reusable sensors because all applications have their own requirements. The Hamilton SU sensors offer the known high accuracy of traditional sensors even after gamma irradiation and dry storage. The SU portfolio offers sensing elements as well as a wide variety of possible connections to transmitters and controllers. Arc modules are available for easy integration of 4 to 20mA and digital signals and allow, in combination with the ArcAir app, to benefit from the Arc technology. Thus calibration data provided on a label can easily be scanned and the sensors are ready to be used with seconds.



#### VisiFerm SU Family

##### Reliable Dissolved Oxygen Measurement

The Hamilton VisiFerm SU sensor systems are available in a wide application range for bag and rigid containers. Various mechanical connections in the vessel are available with a single-use sensor element and reusable electronic for a cost effective application. The new single use optical dissolved oxygen sensor offers a reliable and comparable measurement to existing re-useable probes.



#### Conducell SU Family

##### Conductivity Measurement In Bags

The Conducell SU Family allows measurements in a wide conductivity range in SU applications.



#### OneFerm pH Family

##### High Performance pH Measurement

The Hamilton OneFerm pH sensor is a single use glass electrode in order to ensure a wide measuring range, and a very low drift, even after dry storage and wet-in time. Sensors are available in various lengths and electrical connections so that the pH measurement can benefit from the Arc technology.



#### Incyte SU Family

##### Monitoring Viable Cell Density

Online cell density measurement is essential to ensure reliable processes, especially for long running, i.e. perfusion. Online data provides continuous information in order to optimize control and yield.

# Get Co<sub>2</sub>ntrol

## Solid-State Optical DCO<sub>2</sub> Sensor

Though DCO<sub>2</sub> is commonly recognised as a critical process parameter in biopharmaceutical production, the measurement technology has not really changed a lot. In fact, all in-line sensors available on the market until now are based on the indirect Severinghaus measuring principle – a technology that is more than 50 years old and prone to measurement errors and high maintenance.

It was clear that Hamilton Process Analytics would take on the challenge to develop a new type of sensor that would combine real-time control together with reliability and cost efficiency.

We are now more than proud to present you CO<sub>2</sub>NTROL – our new solid state sensor that directly measures DCO<sub>2</sub> and provides maintenance free, real-time, and in-line control of this critical process parameter.


See more from page → 78



# Intuitive Sensor Management

## The ArcAir App: One Tool for Sensor Management & Ready for GMP Compliance

- Wireless configuration and calibration
- Common interface for mobile, tablet, and PC
- Automated validation and documentation
- Ready for compliance with FDA CFR 21 Part 11 and Eudralex Volume 4 Annex 11

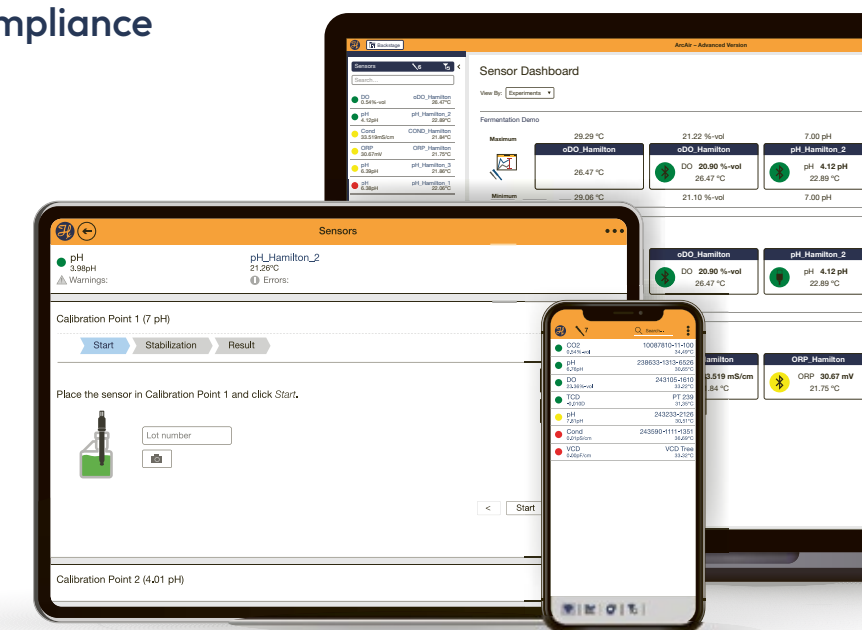

# Field Services

Hamilton's experienced Field Service Team are ready to visit your facility to provide operation installation, qualification support, service diagnostics, maintenance & calibration services, and tailored on-site training. Our on-site services ensure an effortless integration of Hamilton products with your systems.

Let us take the set-up and maintenance stress out of your process. Contact us to find out if we currently offer field services in your local area.

See more from page → 164




# Arc Modbus Converter Portfolio

Our Arc Modbus Converters are now supporting all parameters. Just like the many languages that are spoken around the world, there are various communication protocols in bioproduction, so proper communication among the different devices and process control systems is not necessarily an easy task.

Thanks to our large Arc converter portfolio, we offer seamless integration of our sensors to your protocol so that you can take full advantage of our Arc technology.

See more from page → 116

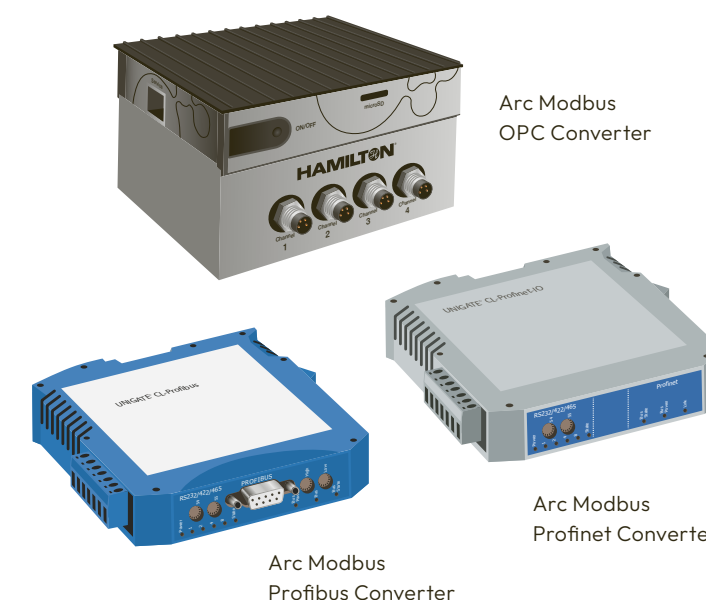



# Beyond Process Analytics

Hamilton's electrochemical and optical sensors are the solution for process analytical measurement systems, characterized by proven quality and outstanding performance. Offering measurement parameter solutions in pH, ORP, dissolved oxygen and conductivity, our sensors and accessories are backed by over 50 years of engineering and manufacturing expertise in innovative design.

## pH Glasses

Measurement Accuracy in Various Applications



Measurement stability and sensor lifetime in various environments requires different pH glasses.

Our high performance glasses, the PHI and the HB glass, were developed to withstand frequent steam sterilization, autoclaving and CIP cleaning using hot caustics. PHI and HB glass provide the lowest drift and show almost no shift after sterilization and cleaning procedures.

The H glass has excellent aging characteristics and offers stable readings even in samples with low water content such as anhydrous or only partially aqueous solutions. The low alkali error of H glass means accurate measurements even at high pH or high operating temperatures. HF glass ensures the longest possible lifetime in low temperature processes and processes containing hydrofluoric acid.

## Foodlyte

Biocompatible Reference Electrolyte

The Foodlyte electrolyte was specifically developed for the needs of the biotechnology, pharmaceutical and food industries. It's based on food ingredients and the perfect electrolyte for applications where non-toxicity is mandatory. Foodlyte is taste-, odor- and harmless for microorganisms.

The biocompatibility is approved by MDT<sup>1</sup> according to EN ISO 10993-5<sup>2</sup> and USP 31, 2008 Chapter 87<sup>3</sup> and according to international GLP<sup>4</sup> guidelines.



<sup>1</sup> Medical Device Testing GmbH Ochsenhausen

<sup>2</sup> Biological evaluation of medical devices -- Part 5: Tests for in vitro cytotoxicity

<sup>3</sup> Biological Activity Tests, In Vitro

<sup>4</sup> Good Laboratory Practice

## Single Pore Concept

The never-clog Liquid Junction

A Single Pore is an open liquid junction and an alternative to diaphragms. Instead of many tiny pores in a ceramic diaphragm, a single pore, about 2000 times larger in diameter, is used. This concept provides a direct contact between reference electrode and sample. In combination with the bigger diameter this liquid junction can hardly be clogged. The Single Pore results in a faster response time, more accurate readings and prevents reference poisoning.

Note: The PTB (Physikalisch-Technische Bundesanstalt = Physical Technical Federal Institute) in Braunschweig, Germany, determined the Single Pore pH electrode to be the most accurate laboratory electrode. Further information can be found in "Traceability of pH measurement" by Petra Spitzer; ISBN 3-89429-877-4 or ISSN 0947-7063.



## Polisolve Plus

Most innovative Polymer Reference Electrolyte

Hamilton has designed innovative Polisolve Plus polymer electrolyte sensors that cover the full pH range, a wide temperature range and withstand reference poisoning for an extended lifetime. It's also stable against most organic solvents and free of toxic acrylamide.

When Polisolve Plus and Single Pore concepts are combined the result is a Polilyte Plus sensor for a wide range of applications as well as a problem solver for difficult applications.

- Industrial waste water
- Hot sugar juice
- Samples containing color pigments
- Oily samples

The combination leads to more stable reference signals and minimized diffusion potentials. Polisolve Plus represents a significant contribution to long lasting pH sensors.



# Conductivity Standards

## Certified and Traceable

Hamilton was the first to offer conductivity standards at 1.3 and 5  $\mu\text{S}/\text{cm}$  with a certified accuracy of  $\pm 1\%$  and a durability of 1.5 or 3 years. All conductivity standards exhibit a previously unknown level of stability which has been confirmed by measurements done by the PTB<sup>1</sup>. Governmental metrological institutes that deal with measurement of electrolytic conductivity have become aware of these standards, and the composition of these standards is patented. The measurement procedure for determining conductivity has been developed in collaboration with the DFM<sup>2</sup>. Each batch is certified by the DFM. In an inter-laboratory test among prestigious European metrological institutes (PTB, DFM, DAkkS<sup>3</sup>), Hamilton standards were used as a measurement solution.

<sup>1</sup> PTB: Physikalisch-Technische Bundesanstalt, Braunschweig, Germany

<sup>2</sup> DFM: Danish Institute of Fundamental Metrology, Lyngby, Denmark

<sup>3</sup> DAkkS: Deutsche Akkreditierungsstelle, Wolfen, Germany



# DuraCal pH Buffers

## Easy Calibration with special designed bottles

DuraCal pH buffers consist of a complete range of patented stable pH buffer solutions from pH 1.09 to pH 12.00. Hamilton guarantees that they will last for up to five years from the date of manufacture. The pH 9.21 and pH 10.01 buffers are even stable in air. High buffer capacities enable quick and stable calibrations.

**Closed-loop traceability:** In contrast to other manufacturers, Hamilton has developed a “closed-loop” traceability. For users of DuraCal pH buffer solutions this means a unique level of reliability.

**Top-down traceability:** With Hamilton the pH value of the DuraCal buffer is determined by a comparison with two secondary reference solutions.

**Bottom-up traceability:** From each lot manufactured, a representative quantity is measured at DAkkS (Deutsche Akkreditierungsstelle, Wolfen, Germany). This ensures an external independent verification by an accredited institute. The DAkkS issues an official calibration certificate for every DuraCal batch manufactured.



# VisiFerm DO

## The most reliable Optical Dissolved Oxygen sensor in the Industry

The VisiFerm DO is the first optical dissolved oxygen (DO) process sensor for demanding applications in the pharmaceutical, biotechnology, and beverage industries. The measuring principle is based on oxygen dependent quenching of the emitting light of a luminophore. Easy and fast to maintain, the multiple time-constraints caused by the use of electrochemical type DO sensors is eliminated. Decreased cost of ownership is further improved with an integrated sensor and cap lifetime check that indicates when the sensor is in need of maintenance. A simple, replaceable ODO cap rebuilds the sensor in seconds.

The optical measurement is independent from the flow and insensitive to  $\text{CO}_2$ . A special window behind the luminophore enables the sensor to withstand pressure hammers and spikes. Due to this design, the VisiFerm DO is suitable for inline measurement of dissolved oxygen in various processes.

See more from page → [82](#)



# The True Power

## Intelligence Integrated

Hamilton Arc revolutionizes the integration of sensors by rethinking communication between sensors, end users, and process control systems (PCS). The functionality of a traditional transmitter has been replaced by a microprocessor within the sensor's head. Arc sensors communicate directly with the PCS through 4-20 mA standard and digital signals.

Arc sensors offer a fully compensated, converted digital and 4-20 mA signal directly to the process control system.

### Fully compensated signal

- Temperature
- Pressure, Salinity

### Signal output

- Digital Modbus
- 4-20 mA analog
- Different parameter units (e.g. mV, ppb, %sat....)

### The integrated micro-transmitter stores


- Last calibration data
- Diagnostic information
- Sensor configuration




# Arc Intelligence

## Arc Sensor Communication

Arc sensors provide full online wireless option for monitoring, configuration, and calibration.

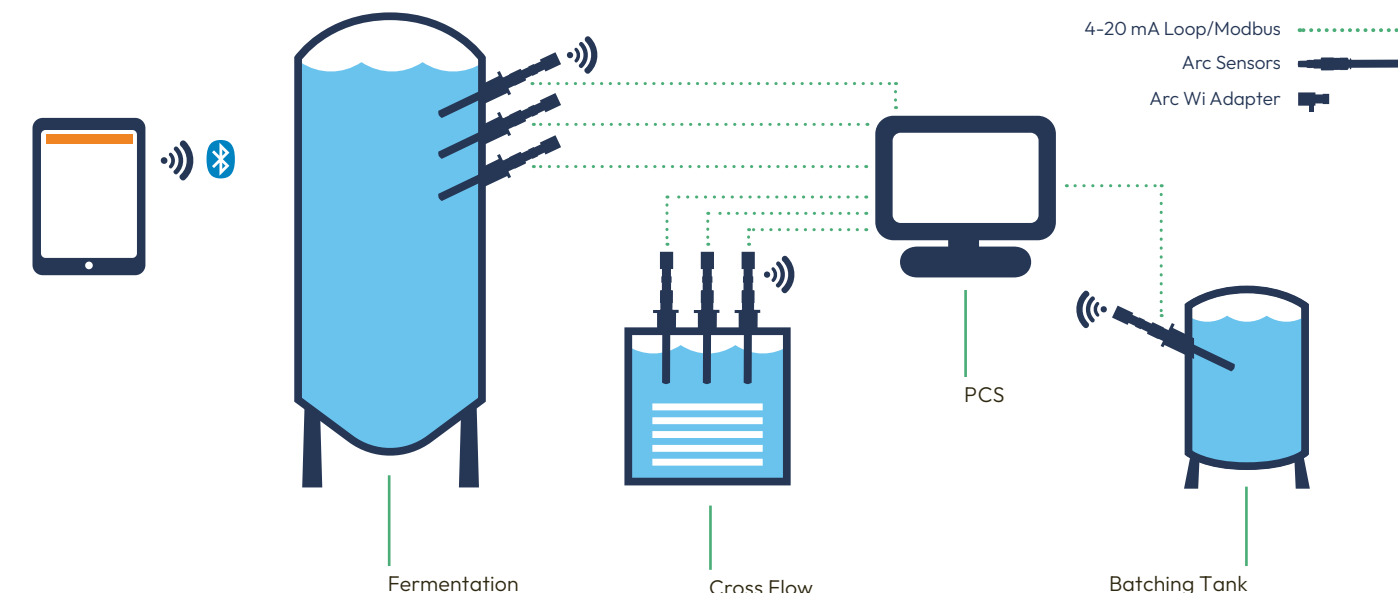

## Laboratory Calibration

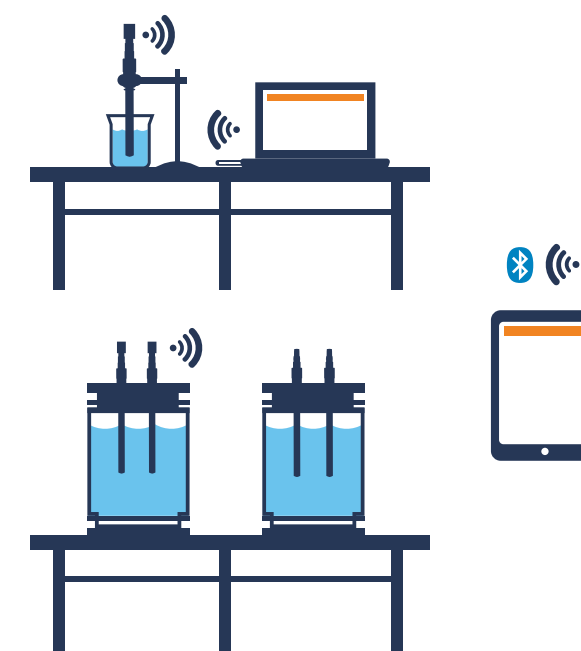


## Complete Arc Sensor Portfolio




# Analog Systems


## Standard Measuring Loop

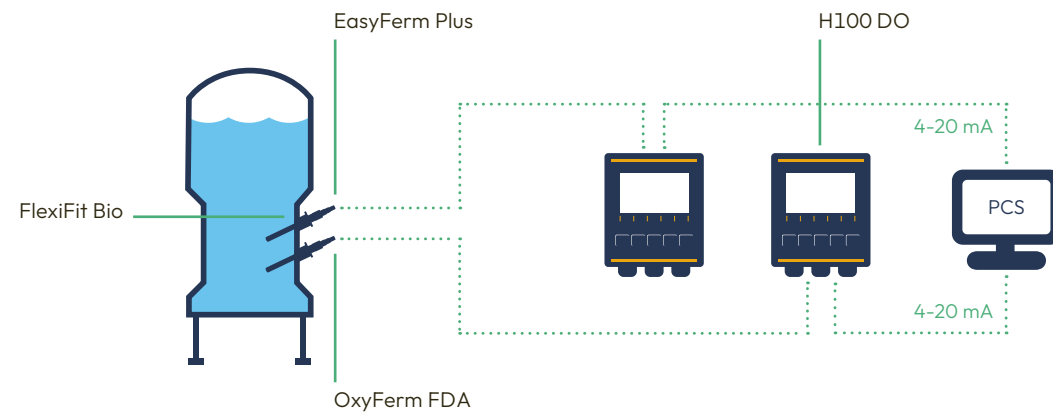

## Measuring Loop in Hazardous Area

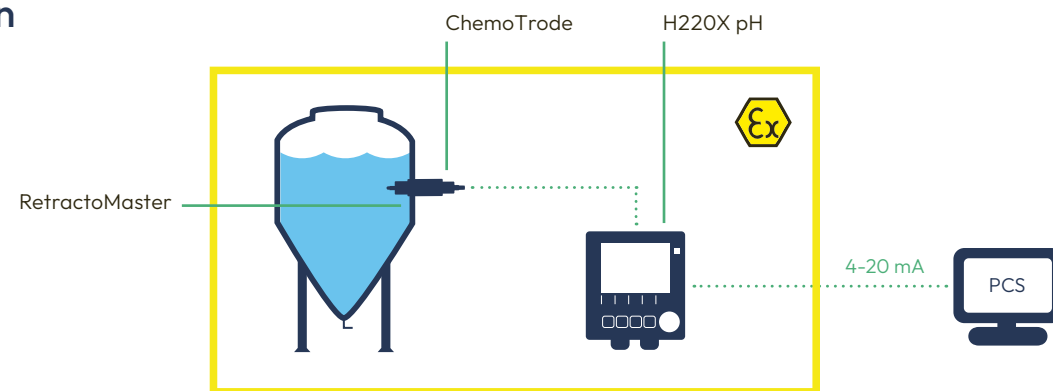


## Measuring Loop in Pipe

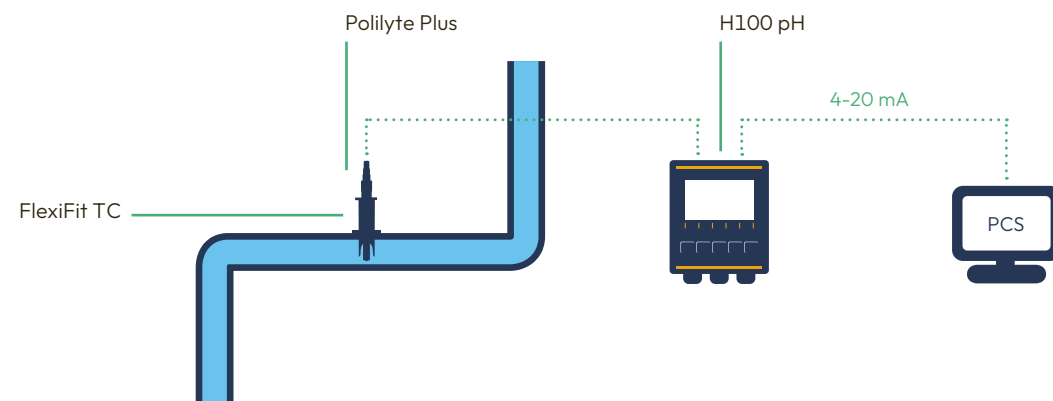


# Arc Systems

## Skid System

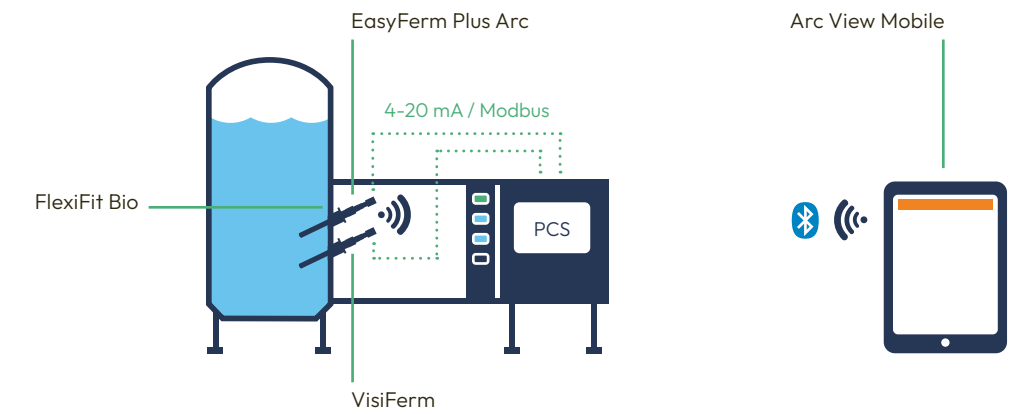

## Arc in R&D

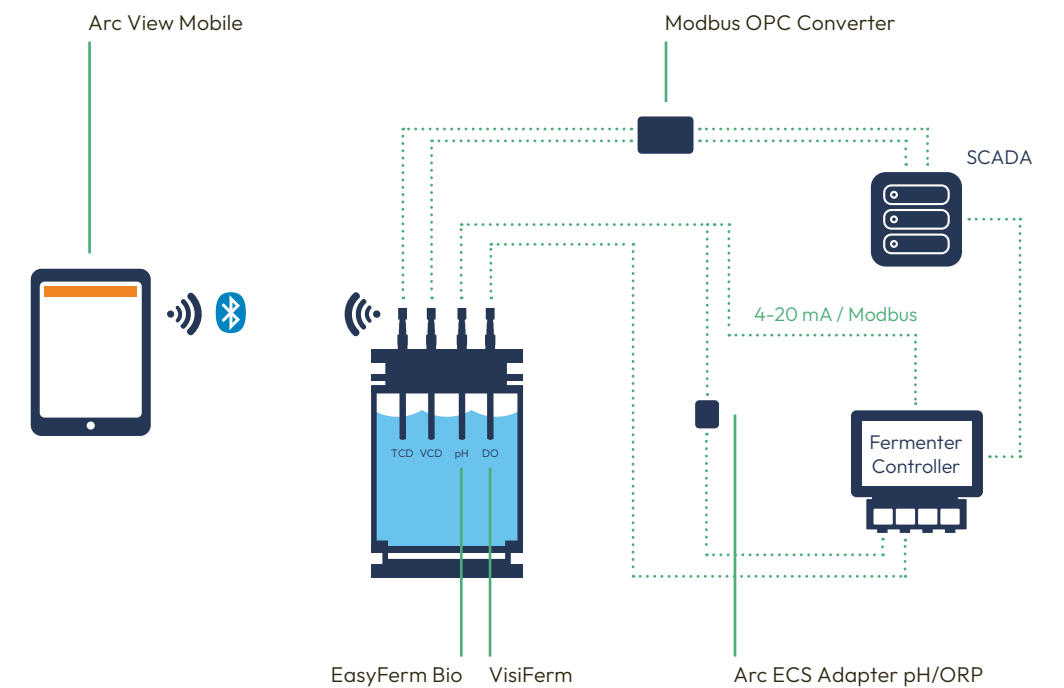



# pH

## pH Sensors

pH measurements are important in many processes. There is almost no application where the pH value does not play a dominant role. All biological processes depend on the activity of enzymes because they show a pH optimum and lose their functionality if the pH is too low or too high.

The pH value is measured in most processes using a glass electrode. This pH glass forms a thin gel layer in aqueous solutions that is highly selective to H<sup>+</sup> ions. The pH dependent potential of the gel layer is measured against a built-in reference electrode with a constant potential. This reference electrode may be a silver wire in contact with solid silver chloride.

In general, the pH value is a measure of the acidity or the basicity of an aqueous solution. In technical terms, pH is the negative logarithm of the activity of the solvated protons H<sup>+</sup>. It's mostly explained as the measure of the proton concentration which is correct for dilute aqueous solutions.

|               |   | Biopharma  |          |            |                                | Chempharma | Cultivated Meat | Brewery and Beverages        |   | Food, Industrial processes | Harsh industrial applications | Waste water treatment | General water applications |
|---------------|---|------------|----------|------------|--------------------------------|------------|-----------------|------------------------------|---|----------------------------|-------------------------------|-----------------------|----------------------------|
| Sensor        | Feature   | Single-Use | Upstream | Downstream | Cleaning (CIP) Water treatment |            |                 | Brewing Fermentation Storage | Cleaning equipment, CIP and water treatment |                            |                               |                       |                            |
| OneFerm pH    | Dry Storage / Low Drift   | ✓          |          |            |                                |            |                 |                              |   |                            |                               |                       |                            |
| EasyFerm Plus | Designed for hygienic applications (autoclavable, CIP and SIP)                  |            | ✓ (PHI)  |            |                                |            |                 |                              |   | ✓ (PHI, HB)                |                               |                       |                            |
| EasyFerm Bio  | Designed for hygienic applications (autoclavable, CIP and SIP)                  |            | ✓ (PHI)  | ✓ (PHI)    |                                |            | ✓ (PHI)         | ✓ (PHI, HB)                  |   | ✓ (PHI, HB)                |                               |                       |                            |
| Polilyte Plus | Designed for low conductivity measurements and strong acids, bases and solvents |            |          |            | ✓ (H)                          | ✓ (H)      |                 |                              | ✓ (H)                                       | ✓ (H, HB, PHI)             |                               | ✓ (HF)                | ✓ (HF)                     |
| MecoTrode     | Designed for extreme pH values and temperature                                  |            |          |            |                                | ✓ (H)      |                 |                              |   | ✓ (H)                      |                               | ✓ (HF)                | ✓ (HF)                     |
| ChemoTrode    | Designed for hygienic applications  |            |          |            |                                | ✓          |                 |                              |   | ✓                          | ✓                             |                       |                            |
| InchTrode     | Designed to withstand demanding applications                                    |            |          |            |                                |            |                 |                              |   |                            | ✓                             | ✓                     | ✓                          |
| IonoTrode     | Designed for very low conductivity measurements                                 |            |          |            |                                |            |                 |                              |   |                            |                               |                       | ✓                          |
| Polilyte Pro  | Designed to perform maintenance free in water applications                      |            |          |            |                                |            |                 |                              |   |                            |                               | ✓                     | ✓                          |
| Polyplast     | Designed to perform maintenance free in water applications                      |            |          |            |                                |            |                 |                              |   |                            |                               | ✓                     | ✓                          |
| EasyControl   | Entry level process sensor for chemical and waste water applications            |            |          |            |                                |            |                 |                              |   |                            |                               | ✓                     | ✓                          |
| Liq-Glass PG  | Entry level process sensor for chemical and waste water applications            |            |          |            |                                |            |                 |                              |   |                            |                               | ✓                     | ✓                          |

# Polilyte Plus

family

pH

The Polilyte Plus sensors is designed for harsh industrial conditions, ensuring maintenance-free operation with anti-clog junctions and reliable accuracy in various solutions. It features an Everef-L reference cartridge for an extended lifespan and integrates Liquid Earth in the VP version for stable signals and enhanced diagnostics.

### Benefits

- Maintenance free design: elimination of clogging with two single pore junctions
- Good performance in highly alkaline solutions and in samples with low conductivity
- Suitable for demanding industrial applications in chemical, petrochemical, process water, and wastewater treatment

### Typical applications

- Chemistry
- Waste Water
- Demanding Applications




### How to choose the glass

| Requirement  | Sensor            | pH glass |
|--|-------------------|----------|
| Hydrofluoric acid (HF) in the media, low temperature | Polilyte Plus HF  | HF       |
| Low conductivity                                     | Polilyte Plus H   | H        |
| CIP, SIP, autoclavations, chemical robustness        | Polilyte Plus PHI | PHI      |
| CIP, SIP, autoclavations, fast response time         | Polilyte Plus HB  | HB       |
| High pressure  | Polilyte Plus XP  | H        |



| Specifications                       |   |
|--------------------------------------|---|
| Measuring range                      | 0 to 14 pH  |
| Process temperature                  | See table on page 166                                       |
| Pressure range (relative to ambient) | See table on page 166                                       |
| Sterilization / cleaning method      | Autoclavable: H, HB, PHI<br>CIP: HB, PHI<br>SIP: H, HB, PHI |
| pH glass                             | See table on page 18  |
| Electrolyte                          | Polisolve Plus  |
| Reference system                     | Everef-L  |
| Diaphragm                            | Single Pore   |
| O-ring                               | EPDM: HB, PHI<br>FKM: H, HF                                 |

For more specifications see [www.hamiltoncompany.com](http://www.hamiltoncompany.com)

| Ordering Information                    |   |   |   |                      |   |                                      |                                    |
|---|---|---|---|----------------------|---|--------------------------------------|------------------------------------|
| Polilyte Plus Family Structure          |   |   |   |                      |   |                                      |                                    |
| 242428                                  | Code  |   | pH glass  |                      |   |                                      |                                    |
|   | 1   |   | H   |                      |   |                                      |                                    |
|   | 2   |   | HB (not for MS)   |                      |   |                                      |                                    |
|   | 3   |   | HF  |                      |   |                                      |                                    |
|   | 4   |   | PHI   |                      |   |                                      |                                    |
|   |  | Code  |   | Electrical Connector |   |                                      |                                    |
|   |   | 1   |   | VP 🚫                 |   |                                      |                                    |
|   |   | 2   |   | S8 🚫                 |   |                                      |                                    |
|   |   | 3   |   | Arc                  |   |                                      |                                    |
|   |   | 4   |   | Memosens 🚫           |   |                                      |                                    |
|   |   |  | Code  |                      | a-length (mm)                           |                                      |                                    |
|   |   |   | 1   |                      | 120                                     |                                      |                                    |
|   |   |   | 2   |                      | 225                                     |                                      |                                    |
|   |   |   | 3   |                      | 325                                     |                                      |                                    |
|   |   |   | 4   |                      | 360 (not for Arc, MS only with H glass) |                                      |                                    |
|   |   |   | 5   |                      | 425                                     |                                      |                                    |
|   |   |   |  | Code                 |   | Temperature sensor                   |                                    |
|   |   |   |   | 1                    |   | Pt100 (VP) (not applicable for Arc)  |                                    |
|   |   |   |   | 2                    |   | Pt1000 (VP) (not applicable for Arc) |                                    |
|   |   |   |   |                      | 3                                       |                                      | none (S8) or given (Memosens, Arc) |
| 242428 –                                |   |   |   |                      |   |                                      |                                    |
| 238811 – Polilyte Plus XP S8 120        |   |   |   |                      |   |                                      |                                    |
| 242415 – Polilyte Plus XP VP 120 Pt1000 |   |   |   |                      |   |                                      |                                    |

### Accessories

- pH buffers → 52
- Cables → 106
- Arc Accessories → 115
- Housings → 123
- Service & Support → 164

# EasyFerm Bio



The Foodlyte electrolyte of the EasyFerm Bio sensors is Certified for bio-compatibility, making it the ideal choice for Food or Biopharma applications.

Different glass membrane formulations are suitable for different applications, allowing the user to optimize their processes. Hamilton’s clog-free diaphragm increases the stability and accuracy of readings, while increasing the lifetime of the sensor.

«Did you know... that you may even eat the Foodlyte?»

### Benefits

- Certified Bio-compatible
- Pre-pressurized reference design for accurate pH measurement
- Clog-free diaphragm ensures extremely low drift over the sensor’s lifetime
- Customizable to your application

### Typical applications

- Bioreactors
- Brewhouse
- Downstream processes
- Gelatine manufacturing

### How to choose the glass

| Requirement                                   | Sensor           | pH glass |
|---|------------------|----------|
| CIP, SIP, autoclavations, chemical robustness | EasyFerm Bio PHI | PHI      |
| CIP, SIP, autoclavations, fast response time  | EasyFerm Bio HB  | HB       |






| Specifications                       |  |
|--------------------------------------|--|
| Measuring range                      | 0 to 14 pH   |
| Process temperature                  | 0 to 140 °C (Arc: analog 0 to 110 °C, digital 0 to 140 °C) |
| Pressure range (relative to ambient) | 0 to 6 bar g   |
| Sterilization / cleaning method      | Autoclavable, SIP, CIP                                     |
| pH glass                             | See table on page 20                                       |
| Electrolyte                          | Foodlyte   |
| Reference system                     | Everef-F   |
| Diaphragm                            | HP Coatramic   |
| O-ring                               | Silicone   |

For more specifications see [www.hamiltoncompany.com](http://www.hamiltoncompany.com)

### Accessories

- pH buffers → 52
- Cables → 106
- Arc Accessories → 115
- Housings → 123
- Service & Support → 164

| Ordering Information          |   |   |   |  |  |                    |  |
|-------------------------------|---|---|---|--|--|--------------------|--|
| EasyFerm Bio Family Structure |   |   |   |  |  |                    |  |
| 243632                        | Code  |   | pH glass  |  |  |                    |  |
|                               | 1   | PHI   |   |  |  |                    |  |
|                               | 2   | HB  |   |  |  |                    |  |
|                               |  | Code  |   | Electrical Connector                   |  |                    |  |
|                               |   | 1   | VP 🍷  |  |  |                    |  |
|                               |   | 2   | S8 🍷  |  |  |                    |  |
|                               |   | 3   | Arc   |  |  |                    |  |
|                               |   | 4   | Memosens 🍷  |  |  |                    |  |
|                               |   | 5   | K8 🍷  |  |  |                    |  |
|                               |   | 6   | LEVP (only for 120 and 225 mm length) 🍷   |  |  |                    |  |
|                               |   |  | Code  |  | a-length (mm)                              |                    |  |
|                               |   |   | 1   | 120                                    |  |                    |  |
|                               |   |   | 2   | 160                                    |  |                    |  |
|                               |   |   | 3   | 200                                    |  |                    |  |
|                               |   |   | 4   | 225                                    |  |                    |  |
|                               |   |   | 5   | 325                                    |  |                    |  |
|                               |   |   | 7   | 425                                    |  |                    |  |
|                               |   |   |  | Code                                   |  | Temperature sensor |  |
|                               |   |   |   | 1                                      | Pt100 (VP, LEVP) (not applicable for Arc)  |                    |  |
|                               |   |   |   | 2                                      | Pt1000 (VP, LEVP) (not applicable for Arc) |                    |  |
|                               |   |   | 3   | none (S8, K8) or given (Memosens, Arc) |  |                    |  |
| 243632 –                      |   |   |   |  |  |                    |  |





# EasyFerm Plus



The EasyFerm Plus with the different glass membrane formulations are suitable for different applications, allowing the user to optimize their processes.

Pairing Hamilton's Phermlyte electrolyte with a pre-pressurized reference and their clog-free HP Coatramic diaphragm increases the stability and accuracy of readings, while increasing the lifetime of the sensor.

«Did you know... that with a pre-pressurized reference system the life time of a sensor is extended?»

### Benefits

- Suitable for all industries
- Pre-pressurized reference design for accurate pH measurement
- Clog-free diaphragm ensures extremely low drift over the sensor's lifetime
- Customizable to your application

### Typical applications

- Bioreactors
- Industrial processes

### How to choose the glass

| Requirement                                   | Sensor            | pH glass |
|---|-------------------|----------|
| CIP, SIP, autoclavations, chemical robustness | EasyFerm Plus PHI | PHI      |
| CIP, SIP, autoclavations, fast response time  | EasyFerm Plus HB  | HB       |











| Specifications                       |  |
|--------------------------------------|--|
| Measuring range                      | 0 to 14 pH   |
| Process temperature                  | 0 to 140 °C (Arc: analog 0 to 110 °C, digital 0 to 140 °C) |
| Pressure range (relative to ambient) | 0 to 6 bar g   |
| Sterilization / cleaning method      | Autoclavable, SIP, CIP                                     |
| pH glass                             | See table on page 22                                       |
| Electrolyte                          | Phermlyte  |
| Reference system                     | Everef-F   |
| Diaphragm                            | HP Coatramic   |
| O-ring                               | EPDM   |

For more specifications see [www.hamiltoncompany.com](http://www.hamiltoncompany.com)

### Accessories

- pH buffers → 52
- Cables → 106
- Arc Accessories → 115
- Housings → 123
- Service & Support → 164

| Ordering Information           |  |   |   |  |   |                    |  |
|--------------------------------|--|---|---|--|---|--------------------|--|
| EasyFerm Plus Family Structure |  |   |   |  |   |                    |  |
| 238633                         | Code   |   | pH glass  |  |   |                    |  |
|                                | 1  | PHI   |   |  |   |                    |  |
|                                | 2  | HB  |   |  |   |                    |  |
|                                |  | Code  |   | Electrical Connector                       |   |                    |  |
|                                |  | 1   | VP                                     |  |   |                    |  |
|                                |  | 2   | S8                                     |  |   |                    |  |
|                                |  | 3   | Arc   |  |   |                    |  |
|                                |  | 4   | Memosens                               |  |   |                    |  |
|                                |  | 5   | K8                                     |  |   |                    |  |
|                                |  | 6   | LEVP (only for 120 and 225 mm length)  |  |   |                    |  |
|                                |  |  | Code  |  | a-length (mm)                             |                    |  |
|                                |  |   | 1   | 120  |   |                    |  |
|                                |  |   | 2   | 160  |   |                    |  |
|                                |  |   | 3   | 200  |   |                    |  |
|                                |  |   | 4   | 225  |   |                    |  |
|                                |  |   | 5   | 325  |   |                    |  |
|                                |  |   | 6   | 360 (not for Arc and only PHI glass)       |   |                    |  |
|                                |  |   | 7   | 425  |   |                    |  |
|                                |  |   |                                        | Code                                       |   | Temperature sensor |  |
|                                |  |   |   | 1  | Pt100 (VP, LEVP) (not applicable for Arc) |                    |  |
|                                |  | 2   |   | Pt1000 (VP, LEVP) (not applicable for Arc) |   |                    |  |
|                                |  | 3   | none (S8, K8) or given (Memosens, Arc)  |  |   |                    |  |
|                                | 238633 –   |   |   |  |   |                    |  |



# MecoTrode



The MecoTrode pH sensors are designed for processes in the chemical industry with extreme pH values.

They are constructed from a H-glass type membrane which provides a low alkaline error and stable measurement even at high temperatures. Three high-performance ceramic diaphragms reduce the effect of flow potential in viscous liquids.

### Benefits

- Capable of measuring a broad range of pH (including extreme pH values)
- Stable and accurate pH readings, even at high temperatures
- Low maintainance
- Suitable for the chemical industry

### Typical applications

- Water and wastewater
- Industrial processes



| Specifications                       |  |
|--------------------------------------|--|
| Measuring range                      | 0 to 14 pH   |
| Process temperature                  | 0 to 130 °C  |
| Pressure range (relative to ambient) | 0 to 16 bar g (25 °C),<br>0 to 6 bar g (130 °C)                                |
| pH glass                             | MecoTrode H: H<br>MecoTrode HF: HF   |
| Electrolyte                          | Viscous 3 M KCl-Pharma, blue   |
| Reference system                     | Everef   |
| Diaphragm                            | HP ceramic   |
| Temperature sensor                   | Pt100 in VP version<br>NTC 22 kOhm in Arc Version<br>NTC 30 kOhm in MS Version |
| O-ring                               | EPDM   |

For more specifications see [www.hamiltoncompany.com](http://www.hamiltoncompany.com)

### Accessories

- pH buffers → 52
- Cables → 106
- Arc Accessories → 115
- Housings → 123
- Service & Support → 164

«Did you know...  
that the MecoTrode is already  
25 years in the market?»



| Ordering Information |          |        |        |        |           |
|----------------------|----------|--------|--------|--------|-----------|
|                      | α-length | S8     | VP6    | MS     | Arc       |
| MecoTrode H          | 120      | 238801 | 238437 | 242837 | 10110152* |
| MecoTrode HF         | 120      | -      | -      | 242839 | -         |
|                      | 225      | -      | -      | 242840 | -         |

\*Not for explosive environments



# OneFerm pH



The OneFerm family of pH sensors is designed for applications in the single-use (SU) Pharmaceutical and Biotechnology Industries. Hamilton OneFerm sensors are the next step in the evolution of single-use measurement. Their design solves some of the issues that commonly occur with reusable pH sensors that are inserted into the bag.

Specifically, Hamilton's single-use sensors combine the reliability and measurement stability of our longterm proven conventional sensors with the ease of use as an integral part of the bioreactor. The sensors retain the high accuracy performance even after gamma irradiation and a sufficient shelf life making it the ideal single-use solution.

## Benefits

- Market-leader solution for a wide range of single-use Biopharma applications
- Certified Bio-compatible
- Ready to use
- Clog-free diaphragm ensures extremely low drift over the sensor's lifetime
- Customisable to your application

## Typical applications

- SU bioreactors (bag application)
- SU bioreactors (rigid containers)
- SU mixer
- SU downstream processes







| Specifications                       |  |
|--------------------------------------|--|
| Measuring range                      | 3 to 10 pH   |
| Process temperature                  | 4 to 50 °C   |
| Pressure range (relative to ambient) | 0 to 1 bar g   |
| Sterilization / cleaning method      | Gamma irradiation up to 45 kGy (for the OneFerm sensors together with the pH Insert) |
| O-ring                               | Silicone   |

For more specifications see [www.hamiltoncompany.com](http://www.hamiltoncompany.com)

## Accessories

- Cables → 106
- Arc Accessories → 115
- Service & Support → 164

«Did you know... that with the reusable Arc Module SU pH a very stable digital signal can be achieved?»

|                      |          |  |  |  |  |
|----------------------|----------|--|--|--|--|
| Ordering Information |          |  |  |  |  |
|                      | α-length | VP6 / Pt100  | VP6 / Pt1000   | VP6 / NTC22  | K8   |
| OneFerm pH           | 70       | 243216   | 243266   | 243235   | –  |
|                      | 120      | 243217   | 243267   | 243236   | 243271   |
|                      | 160      | 10064894   | 10108674   | 10065001   | 10106075   |
|                      | 225      | 243218   | 243268   | 243237   | 243272   |
|                      | 325      | 243219   | 243269   | 243238   | 243273   |
|                      | 425      | 10101065   | 10089592   | 243239   | 243274   |



Arc Module SU pH  
REF 243233



pH Insert T  
REF 10155128





# ChemoTrode / P



The ChemoTrode is our most robust sensor, designed for measuring pH in demanding applications in pharmaceutical and chemical industries.

The Everef-F reference cartridge ensures that the reference electrolyte remains free of silver and precipitation of proteins, while the liquid electrolyte can be easily refilled and pressurized up to 6 bar through a port in the sensor for easy maintenance. Refillable liquid electrolyte ensures fast response times and high precision during measurements.

## Benefits

- Robust sensor suitable for demanding applications in pharmaceutical and chemical industries
- Liquid electrolyte ensures fast response time and high precision
- Everef-F reference cartridge extends electrode lifetime by preventing diaphragm clogging

## Typical applications

- Chemical
- Demanding Applications



| Specifications                       |   |
|--------------------------------------|---|
| Measuring range                      | 0 to 14 pH  |
| Process temperature                  | 0 to 130 °C   |
| Pressure range (relative to ambient) | 0 to 6 bar g  |
| Sterilization / cleaning method      | SIP, CIP  |
| pH glass                             | PHI   |
| Electrolyte                          | ChemoTrode: Viscous 3 M KCl-LR<br>ChemoTrode P: Protelyte |
| Reference system                     | Everef-F  |
| Diaphragm                            | HP ceramic  |
| Temperature sensor                   | Pt1000 in VP version                                      |

For more specifications see [www.hamiltoncompany.com](http://www.hamiltoncompany.com)

## Accessories

- pH buffers → [52](#)
- Cables → [106](#)
- Housings → [123](#)
- Service & Support → [164](#)

| Ordering Information |          |        |              |             |
|----------------------|----------|--------|--------------|-------------|
|                      | α-length | S7     | VP6 / Pt1000 | VP6 / Pt100 |
| ChemoTrode P         | 120      | 238761 | 243252       | -           |
|                      | 150      | 238763 | 243253       | -           |
|                      | 250      | 238767 | 243254       | -           |
| ChemoTrode           | 120      | 238760 | 242700       | -           |
|                      | 150      | 238762 | 242701       | -           |
|                      | 200      | 238764 | -            | -           |
|                      | 250      | 238766 | 242703       | 10069903    |



# InchTrode



The InchTrode sensors are designed to measure pH in demanding applications in the paper making as well as in the chemical industries. The Single Pore liquid junction guarantees the best and fast measuring results because of direct contact between the sample and the Polysolve electrolyte.

The InchTrode sensors are easy to install without additional housing and have a robust PEEK shaft.

### Benefits

- Single Pore for direct sample contact with Polysolve electrolyte – no clogging
- Very long-lasting reference system
- Robust PEEK shaft
- Simple installation without additional housing

### Typical applications

- Pulp and Paper industry
- Water and Wastewater



| Specifications                          |   |
|---|---|
| Measuring range                         | 0 to 14 pH  |
| Process temperature                     | -10 to 130 °C (flat membrane)<br>0 to 130 °C (cylindrical membrane) |
| Pressure range<br>(relative to ambient) | 0 to 10 bar g (25 °C)<br>0 to 6 bar g (130 °C)                      |
| pH glass                                | HF (flat membrane)<br>PHI (cylindrical membrane)                    |
| Electrolyte                             | Polysolve   |
| Reference system                        | Everef-L  |
| Diaphragm                               | Single Pore   |
| Temperature sensor                      | Pt1000 in VP version<br>Pt100 in fix cable version                  |

For more specifications see [www.hamiltoncompany.com](http://www.hamiltoncompany.com)

### Accessories

- pH buffers → 52
- Cables → 106
- Housings → 123
- Service & Support → 164

«Did you know... that the InchTrode is available in two different sizes and with different membrane shapes?»



| Ordering Information |         |          |                 |           |
|----------------------|---------|----------|-----------------|-----------|
|                      | Type    | a-length | VP6             | fix cable |
| InchTrode            | N75F    | 143      | 238346          | –         |
|                      | N75P    | 150      | 238342          | –         |
|                      | N75FC10 | 143      | –               | 238364    |
|                      | N75PC10 | 150      | –               | 238359    |
|                      | N100F   | 140      | 238352 (non Ex) | –         |

F = Flat membrane  
P = Cylindrical membrane  
C = Fix cable



# IonoTrode



The IonoTrode sensor is designed for applications in ion weak media. The F glass membrane has a very low resistance, therefore the sensor can be used in samples with low conductivity, where it offers highest accuracy over a long period of time.

If there is a storage container with 3 M KCl attached via a tube to the side-arm of the IonoTrode, the flow-out of the electrolyte can be controlled with the sleeve diaphragm.

### Benefits

- Offers highest accuracy over a long period of time
- Stable measurements in samples with low conductivity of at least 0.2  $\mu\text{S}/\text{cm}$
- Removable PTFE sleeve diaphragm to check electrolyte outflow
- Side-arm attachment via tube to storage vessel containing 3 M KCl, and control of electrolyte flow with PTFE diaphragm ring

### Typical applications

- Drinking Water Plants
- Boiler Feed Water



| Specifications                       |  |
|--------------------------------------|--|
| Measuring range                      | 0 to 14 pH   |
| Process temperature                  | -10 to 40 °C   |
| Pressure range (relative to ambient) | 0 to 0.5 bar or higher if pressurization by side-arm |
| pH glass                             | F  |
| Electrolyte                          | 3 M KCl  |
| Reference system                     | Everef   |
| Diaphragm                            | Sleeve   |
| O-ring                               | EPDM   |

For more specifications see [www.hamiltoncompany.com](http://www.hamiltoncompany.com)

### Accessories

- pH buffers → 52
- Cables → 106
- Housings → 123
- Service & Support → 164

«Did you know... that the IonoTrode is designed for ion weak media with a low conductivity of only 0.2  $\mu\text{S}/\text{cm}$ ?»

| Ordering Information |                  |        |
|----------------------|------------------|--------|
|                      | $\alpha$ -length | S7     |
| IonoTrode            | 120              | 238525 |



# Polilyte Pro

# Polyplast Pro

pH

The maintenance free Polilyte Pro and Polyplast Pro sensors are designed for pH measurement in water applications, especially in low conductivity samples, e.g. wastewater, fish farming, ground water, etc.

The Single Pore liquid junction guarantees best measurement results because of direct contact between the sample and the Polysolve electrolyte – clogging is nearly impossible. The Polyplast Pro sensor comes with a robust plastic shaft and glass bulb protection.

### Benefits

- Single Pore for direct sample contact with Polysolve electrolyte
- No clogging
- Fast response even in low conductivity media
- Easy maintenance due to non-refillable electrolyte

### Typical applications

- Wastewater applications
- Fish farming
- Ground water



| Specifications                       |   |
|--------------------------------------|---|
| Measuring range                      | 0 to 14 pH  |
| Process temperature                  | Polilyte Pro: -10 to 60 °C<br>Polyplast Pro: -10 to 40 °C |
| Pressure range (relative to ambient) | 0 to 6 bar g  |
| pH glass                             | Polilyte Pro: HF<br>Polyplast Pro: V                      |
| Electrolyte                          | Polysolve   |
| Reference system                     | Polilyte Pro: Everef-B<br>Polyplast Pro: Ag/AgCl          |
| Diaphragm                            | Single Pore   |
| Temperature sensor                   | Pt1000 in VP version                                      |
| O-ring                               | Polilyte Pro: EPDM<br>Polyplast Pro: EPDM                 |

For more specifications see [www.hamiltoncompany.com](http://www.hamiltoncompany.com)

### Accessories

- pH buffers → 52
- Cables → 106
- Housings → 123
- Service & Support → 164

«Did you know... that the Polilyte Pro has the HF resistant pH glass?»

| Ordering Information |          |        |        |
|----------------------|----------|--------|--------|
|                      | α-length | S8     | VP6    |
| Polilyte Pro         | 120      | 238411 | 238417 |
| Polyplast Pro        | 120      | 238408 | -      |

# Liq-Glass PG EasyControl

pH

The maintenance free Liq-Glass PG and the EasyControl sensors are entry level sensors for chemical or waste water applications and low process temperatures. They show good behaviour in samples with low conductivity.

«Did you know... that the EasyControl is also available as ORP sensor?»

### Benefits

- Suitable for low conductivity media
- Easy maintenance due to non-refillable electrolyte
- Liq-Glass PG has 3 ceramic diaphragms for reduced flow potentials

### Typical applications

- Wastewater applications
- Fish farming
- Ground water
- Swimming Pools



| Specifications                       |  |
|--------------------------------------|--|
| Measuring range                      | Liq-Glass PG: 1 to 12 pH<br>EasyControl: 0 to 14 pH              |
| Process temperature                  | Liq-Glass PG: -5 to 60 °C<br>EasyControl: 0 to 60 °C             |
| Pressure range (relative to ambient) | 0 to 2 bar g   |
| pH glass                             | Liq-Glass PG: F<br>EasyControl: HF                               |
| Electrolyte                          | Liq-Glass PG: Viscous 3 M KCl-LR<br>EasyControl: Gel electrolyte |
| Reference system                     | Liq-Glass PG: Everef<br>EasyControl: Ag/AgCl                     |
| Diaphragm                            | Ceramic  |
| O-ring                               | Liq-Glass: EPDM<br>EasyControl: EPDM                             |

For more specifications see [www.hamiltoncompany.com](http://www.hamiltoncompany.com)

### Accessories


- pH buffers → 52
- Cables → 106
- Housings → 123
- Service & Support → 164



| Ordering Information |          |        |
|----------------------|----------|--------|
|                      | a-length | S8     |
| Liq-Glass PG         | 120      | 238515 |
| EasyControl (Non Ex) | 120      | 238522 |





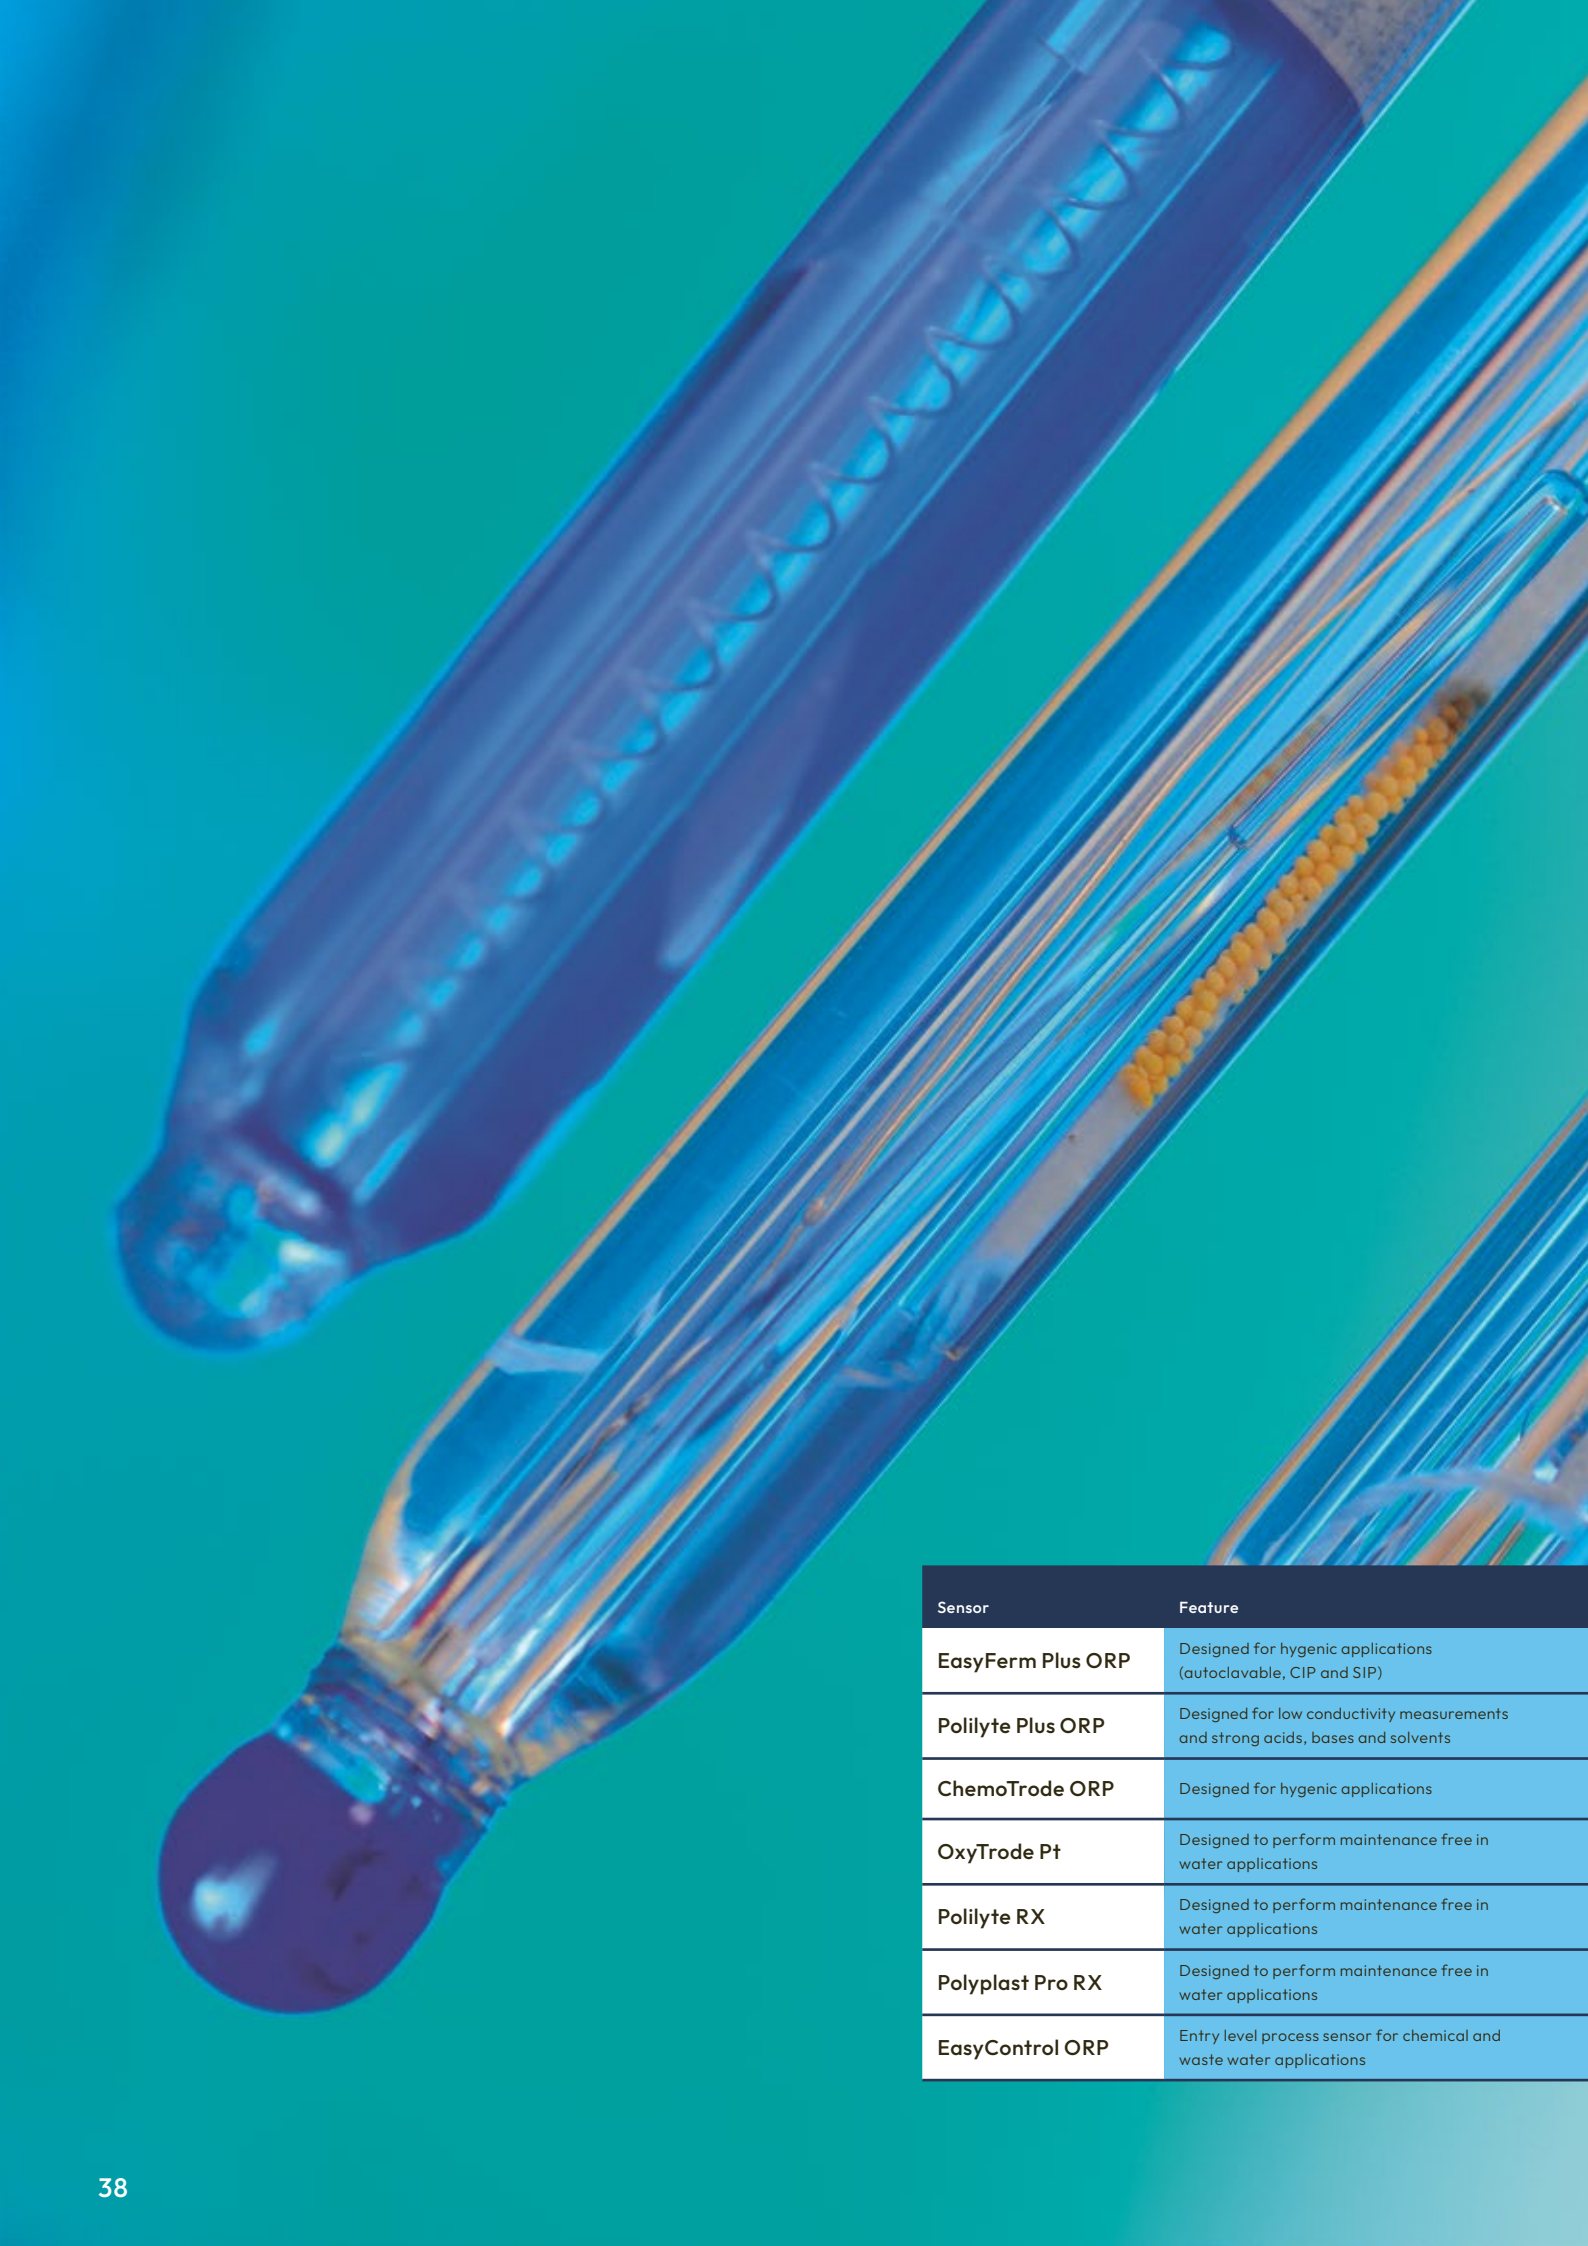

# ORP

## ORP Sensors

ORP (Oxidation Reduction Potential) is a common measurement in biochemistry, environmental chemistry and water quality. In the biochemical perspective, an oxidizing chemical pulls electrons away from the cell membrane which means it can be destabilized and leaky. The rapid death of a cell is the consequence of a destroyed membrane. The ORPs of natural systems like aerated surface water, rivers, lakes, rainwater and acid mine water usually have oxidizing conditions leading to positive potentials. Submerged soils, swamps and marine sediments, where air supply has its limitations, reducing conditions are the norm leading to negative potentials. For water system monitoring, the ORP value provides the operator with a rapid and single-value assessment of the disinfection potential of water in the postharvest system. This enables the operator to assess the activity of the applied disinfectant rather than the applied dose.

ORPs in aqueous solutions are determined by measuring the potential difference between an inert sensing electrode in contact with the solution and a stable reference electrode. The reference electrode is connected to the solution by a salt bridge. It has a known potential and is made of silver chloride or saturate calomel. Platinum is frequently used for the sensing electrode.

The Oxygen-Reduction Potential, also known as Redox Potential describes the tendency of a chemical species or a solution to acquire electrons and therefore to be reduced. Each species has its own reduction potential. It is measured in Volts (V) or mV.

| Sensor            | Feature   | Biopharma  |          |            |                                   | Chempharma | Food, Industrial processes | Harsh industrial applications | Waste water treatment | General water applications |
|-------------------|---|------------|----------|------------|-----------------------------------|------------|----------------------------|-------------------------------|-----------------------|----------------------------|
|                   |   | Single-Use | Upstream | Downstream | Cleaning (CIP)<br>Water treatment |            |                            |                               |                       |                            |
| EasyFerm Plus ORP | Designed for hygienic applications (autoclavable, CIP and SIP)                  |            | ✓        | ✓          |                                   |            | ✓                          |                               |                       |                            |
| Polilyte Plus ORP | Designed for low conductivity measurements and strong acids, bases and solvents |            |          |            |                                   | ✓          | ✓                          | ✓                             | ✓                     | ✓                          |
| ChemoTrode ORP    | Designed for hygienic applications  |            |          |            |                                   | ✓          | ✓                          | ✓                             |                       |                            |
| OxyTrode Pt       | Designed to perform maintenance free in water applications                      |            |          |            |                                   | ✓          | ✓                          |                               | ✓                     | ✓                          |
| Polilyte RX       | Designed to perform maintenance free in water applications                      |            |          |            |                                   |            |                            |                               | ✓                     | ✓                          |
| Polyplast Pro RX  | Designed to perform maintenance free in water applications                      |            |          |            |                                   |            |                            |                               | ✓                     | ✓                          |
| EasyControl ORP   | Entry level process sensor for chemical and waste water applications            |            |          |            |                                   |            |                            |                               | ✓                     | ✓                          |



# Polilyte Plus ORP



The maintenance free Polilyte Plus ORP sensors are designed to withstand demanding applications in chemical and petrochemical industries. Monitoring the ORP value is becoming increasingly important in many applications, especially harsh chemical environments or high alkaline wastewater. Because of its Single Pore diaphragms you will never have liquid junction problems and total breakdowns. The Polilyte Plus ORP sensors demonstrate reliable reproducible measurement accuracy in highly alkaline solutions as well as in samples with low conductivity. Additionally, the Everef-L reference cartridge ensures a long lifetime.

### Benefits

- 2 Single Pores prevent clogging and ensure reliable measurements
- Minimal diffusion potential
- Highly reproducible measurements and very stable over a long period of time
- Resistant against solvents, strong acids and bases

### Typical applications

- Sugar industry
- Dye industry
- Industrial wastewater
- Paper industry



| Specifications                       |   |
|--------------------------------------|---|
| Measuring range                      | ± 2000 mV (Arc: ± 1500 mV)  |
| Process temperature                  | 0 to 130 °C (Arc: analog 0 to 110 °C, digital 0 to 140 °C)                |
| Pressure range (relative to ambient) | 0 to 3 bar g (140 °C)<br>0 to 10 bar g (130 °C)<br>0 to 16 bar g (100 °C) |
| Sterilization / cleaning method      | Autoclavable, CIP, SIP  |
| ORP element                          | Pt wire   |
| Electrolyte                          | Polisolve Plus  |
| Reference system                     | Everef-L  |
| Diaphragm                            | Single Pore   |
| O-ring                               | FKM   |

For more specifications see [www.hamiltoncompany.com](http://www.hamiltoncompany.com)

### Accessories

- [ORP buffers → 52](#)
- [Cables → 106](#)
- [Arc Accessories → 115](#)
- [Housings → 123](#)
- [Service & Support → 164](#)

| Ordering Information |          |          |  |        |        |
|----------------------|----------|----------|--|--------|--------|
|                      | α-length | S8       |  | Arc    | VP6    |
| Polilyte Plus ORP    | 120      | 243185   |  | 243060 | 243648 |
|                      | 225      | 243186   |  | 243061 | -      |
|                      | 325      | 10078139 |  | 243062 | -      |
|                      | 425      | 10078140 |  | 243063 | -      |



# EasyFerm Plus ORP

ORP

The EasyFerm Plus ORP sensors are designed to withstand demanding applications in pharmaceutical and chemical industries. It is supplied with a pre-pressurized electrolyte which prevents the diffusion of sample into the sensors. The Everef-F reference cartridge ensures that the Phermlyte reference electrolyte remains free of silver and precipitation.

Measuring the ORP value is getting more and more important in the branches mentioned above.

### Benefits

- Pre-pressurized reference electrolyte ensures a clog-free diaphragm
- Almost drift-free measurement
- Stable measurement signals after steam sterilization, autoclavation and CIP cleanings
- Large platinum ring

### Typical applications


- Bioreactors
- Industrial processes
- Downstream processes



| Specifications                       |  |
|--------------------------------------|--|
| Measuring range                      | ± 2000 mV (Arc: ± 1500 mV)                                 |
| Process temperature                  | 0 to 140 °C (Arc: analog 0 to 110 °C, digital 0 to 140 °C) |
| Pressure range (relative to ambient) | 0 to 6 bar g   |
| Sterilization / cleaning method      | Autoclavable, CIP, SIP                                     |
| ORP element                          | Pt ring  |
| Electrolyte                          | Phermlyte  |
| Reference system                     | Everef-F   |
| Diaphragm                            | HP Coatramic   |
| O-ring                               | EPDM   |

For more specifications see [www.hamiltoncompany.com](http://www.hamiltoncompany.com)

### Accessories

-  [ORP buffers → 52](#)
-  [Cables → 106](#)
-  [Arc Accessories → 115](#)
-  [Housings → 123](#)
-  [Service & Support → 164](#)



| Ordering Information |          |        |        |
|----------------------|----------|--------|--------|
|                      | α-length | S8     | Arc    |
| EasyFerm Plus ORP    | 120      | 243187 | 243050 |
|                      | 225      | 243188 | 243051 |
|                      | 325      | –      | 243052 |
|                      | 425      | –      | 243053 |

# ChemoTrode

## ORP

ORP

The ChemoTrode ORP is the most robust sensor to measure the oxidation-reduction potential in demanding applications in pharmaceutical and chemical industries. The ChemoTrode ORP has a refill hole which allows refilling the electrolyte and pressurization of the reference electrolyte. Its Everef-F reference cartridge ensures that the reference electrolyte remains free of silver and precipitation of proteins.

### Benefits

- Liquid electrolyte ensures fast response time and high precision
- Longer lifetime thanks to refillable electrolyte
- Everef-F reference cartridge extends electrode life in aggressive media

### Typical applications

- Industrial processes
- Mining Industry
- Pulp and Paper industry
- Fermentations



| Specifications                       |                    |
|--------------------------------------|--------------------|
| Measuring range                      | ± 2000 mV          |
| Process temperature                  | 0 to 130 °C        |
| Pressure range (relative to ambient) | 0 to 6 bar g       |
| Sterilization / cleaning method      | CIP, SIP           |
| ORP element                          | Pt ring            |
| Electrolyte                          | Viscous 3 M KCl-LR |
| Reference system                     | Everef-F           |
| Diaphragm                            | HP Ceramic         |

For more specifications see [www.hamiltoncompany.com](http://www.hamiltoncompany.com)

### Accessories

- [ORP buffers → 52](#)
- [Cables → 106](#)
- [Housings → 123](#)
- [Service & Support → 164](#)

| Ordering Information |          |        |
|----------------------|----------|--------|
|                      | α-length | S7     |
| ChemoTrode ORP       | 120      | 238740 |
|                      | 150      | 238742 |





# OxyTrode Pt



The maintenance free OxyTrode Pt is an ORP sensor designed for processes in the chemical industry and for applications in wastewater treatment. Three high-performance ceramic diaphragms reduce the effect of flow potential in pipe mounting.

### Benefits

- 3 high performance ceramic diaphragms for reduced flow potentials when mounted in pipes
- Platinum wire coil welded onto the glass

### Typical applications

- Water and Wastewater
- Industrial processes



| Specifications                          |  |
|---|--|
| Measuring range                         | ± 2000 mV                                      |
| Process temperature                     | 0 to 130 °C                                    |
| Pressure range<br>(relative to ambient) | 0 to 16 bar g (25 °C)<br>0 to 6 bar g (130 °C) |
| ORP element                             | Pt wire  |
| Electrolyte                             | Viscous 3 M KCl-Pharma, blue                   |
| Reference system                        | Everef   |
| Diaphragm                               | HP ceramic                                     |
| O-ring                                  | EPDM   |

For more specifications see [www.hamiltoncompany.com](http://www.hamiltoncompany.com)

### Accessories

- ORP buffers → 52
- Cables → 106
- Housings → 123
- Service & Support → 164

«Did you know... that the OxyTrode Pt is the ORP version of the MecoTrode?»

| Ordering Information |          |        |
|----------------------|----------|--------|
|                      | α-length | S8     |
| OxyTrode             | 120      | 238810 |



# Polilyte RX

# Polyplast Pro RX



The maintenance free Polilyte RX and Polyplast Pro RX sensors are designed for ORP measurement in water applications and low conductivity samples, e.g. wastewater, fish farming, ground water, etc.

The Single Pore liquid junction guarantees best measurement results because of direct contact between the sample and the Polysolve electrolyte – clogging is nearly impossible. The Polyplast Pro sensor comes with a robust plastic shaft and glass bulb protection, making it one of our most economical and longest lasting sensors.

### Benefits

- Single Pore for direct sample contact with Polysolve electrolyte
- No clogging
- Fast response even in low conductivity media
- Easy maintenance due to non refillable electrolyte

### Typical applications

- Wastewater applications
- Fish farming
- Ground water



| Specifications                       |   |
|--------------------------------------|---|
| Measuring range                      | ± 2000 mV   |
| Process temperature                  | Polilyte RX: -10 to 60 °C<br>Polyplast Pro RX: -10 to 40 °C |
| Pressure range (relative to ambient) | 0 to 6 bar g  |
| ORP element                          | Pt-wire   |
| Electrolyte                          | Polysolve   |
| Reference system                     | Polilyte RX: Everef-B<br>Polyplast Pro RX: Ag/AgCl          |
| Diaphragm                            | Single Pore   |
| O-ring                               | Polilyte RX: EPDM<br>Polyplast Pro RX: EPDM                 |

For more specifications see [www.hamiltoncompany.com](http://www.hamiltoncompany.com)

### Accessories

- [ORP buffers → 52](#)
- [Cables → 106](#)
- [Housings → 123](#)
- [Service & Support → 164](#)

| Ordering Information |          |        |
|----------------------|----------|--------|
|                      |          |        |
|                      | α-length | S8     |
| Polilyte RX          | 120      | 238433 |
| Polyplast Pro RX     | 120      | 238409 |



# EasyControl ORP



The maintenance free EasyControl ORP is an entry level ORP sensor for chemical or wastewater applications and low process temperatures.

It is also often used in swimming pools to control the disinfection with chlorine. They show also good behavior in samples containing few ions, with respectively low conductivity.

### Benefits

- Suitable for low conductivity media
- Easy maintenance due to non refillable electrolyte

### Typical applications


- Wastewater applications
- Fish farming
- Ground water
- Swimming Pools



| Specifications                       |                 |
|--------------------------------------|-----------------|
| Measuring range                      | ± 2000 mV       |
| Process temperature                  | 0 to 60 °C      |
| Pressure range (relative to ambient) | 0 to 2 bar g    |
| ORP element                          | Pt-wire         |
| Electrolyte                          | Gel electrolyte |
| Reference system                     | Ag/AgCl         |
| Diaphragm                            | Ceramic         |
| O-ring                               | EPDM            |

For more specifications see [www.hamiltoncompany.com](http://www.hamiltoncompany.com)

### Accessories

-  [ORP buffers → 52](#)
-  [Cables → 106](#)
-  [Housings → 123](#)
-  [Service & Support → 164](#)



| Ordering Information |          |        |
|----------------------|----------|--------|
|                      | α-length | S8     |
| EasyControl ORP      | 120      | 238523 |



# Buffer Solutions

## for pH and ORP Sensor Calibration

All calibration procedures assume that the labeled values of the calibration buffers are correct. But buffer values can change over time and so can your results. A complete range of patented buffer solutions provides pH stability up to 5 years, something never achieved before. The pH buffers 9.21 and 10.01 are even stable when exposed to air. High buffering capacity provides rapid, stable calibration. The growth of fungus and micro-organisms is prevented.

### Traceability

An important issue for the production of Certified Reference Materials is to ensure traceability through an unbroken chain of comparisons to reference material of the highest metrological quality (Primary Reference Material) from NIST<sup>1</sup> and PTB<sup>2</sup>. Unlike other manufacturers, where only top-down traceability is applied, Hamilton works with circular or closed-loop traceability, providing unique reliability of Hamilton DuraCal buffers.

**Top-down traceability:** At Hamilton, the pH value of DuraCal buffers is determined by comparison against two secondary reference buffer solutions from accredited suppliers of secondary reference materials. The solutions themselves are compared against primary reference solutions from PTB or NIST. The measurement uncertainties of every measurement comparison are known and documented.

**Bottom-up traceability:** To ensure the highest possible accuracy and full reliability of the pH value, a representative number of samples from every single production lot is verified by an external, independent and impartial DAkkS<sup>3</sup> laboratory. The DuraCal samples are compared against secondary reference solutions from DAkkS and these are referenced themselves to primary reference solutions from PTB or NIST. At this stage, the traceability loop is closed. DAkkS provides Hamilton with a calibration certificate for every DuraCal production batch.



**Certified reference material:** Due to the complete traceability of the measurement procedure and the assignment of uncertainties to the particular testing steps, the buffers pH 1.68, 2, 4.01, 7.00, 9.21, 10.01 and 12 are classified as “Certified Reference Material” (CRM).

Benefits

- Convenient: bottle has a built-in calibration compartment
- Economical: only 15 mL used per calibration
- Certified and traceable pH value from an accredited Dakks laboratory

First class certificates available at [www.hamiltoncompany.com](http://www.hamiltoncompany.com)

<sup>1</sup> NIST: National Institute of Standards and Technology, Gaithersburg, MD, USA  
<sup>2</sup> PTB: Physikalisch Technische Bundesanstalt, Braunschweig, Germany  
<sup>3</sup> DAkkS: Deutsche Akkreditierungsstelle GmbH (D-K-15186-01-00), Zentrum for Messen und Kalibrieren GmbH, Wolfen, Germany

## pH Buffers

| pH Value        | Accuracy    | Stability* | Certified By | Packaging Unit | REF      |
|-----------------|-------------|------------|--------------|----------------|----------|
| 1.09            | ±0.02       | 60         | Hamilton     | 500 mL         | 238271   |
| 1.68            | ±0.02       | 60         | DAkkS        | 500 mL         | 238272   |
| 2.00            | ±0.02       | 60         | DAkkS        | 500 mL         | 238273   |
| 2.00            | ±0.02       | 60         | DAkkS        | 10 L           | 11011362 |
| 3.06            | ±0.02       | 60         | Hamilton     | 500 mL         | 238274   |
| 4.01            | ±0.01/±0.02 | 24/60      | DAkkS        | 250 mL         | 238317   |
| 4.01            | ±0.01/±0.02 | 24/60      | DAkkS        | 500 mL         | 238217   |
| 4.01            | ±0.01/±0.02 | 24/60      | DAkkS        | 3 x 500 mL     | 238917   |
| 4.01            | ±0.01/±0.02 | 24/60      | DAkkS        | 5 L            | 238332   |
| 4.01            | ±0.01/±0.02 | 24/60      | DAkkS        | 10 L           | 238194   |
| 5.00            | ±0.02       | 60         | Hamilton     | 500 mL         | 238275   |
| 6.00            | ±0.02       | 60         | Hamilton     | 500 mL         | 238276   |
| 7.00            | ±0.01/±0.02 | 24 / 60    | DAkkS        | 250 mL         | 238318   |
| 7.00            | ±0.01/±0.02 | 24 / 60    | DAkkS        | 500 mL         | 238218   |
| 7.00            | ±0.01/±0.02 | 24 / 60    | DAkkS        | 3 x 500 mL     | 238918   |
| 7.00            | ±0.01/±0.02 | 24 / 60    | DAkkS        | 5 L            | 238333   |
| 7.00            | ±0.01/±0.02 | 24 / 60    | DAkkS        | 10 L           | 238188   |
| 8.00            | ±0.02       | 60         | Hamilton     | 500 mL         | 238277   |
| 9.21            | ±0.02       | 60         | DAkkS        | 250 mL         | 238319   |
| 9.21            | ±0.02       | 60         | DAkkS        | 500 mL         | 238219   |
| 9.21            | ±0.02       | 60         | DAkkS        | 3 x 500 mL     | 238919   |
| 9.21            | ±0.02       | 60         | DAkkS        | 10 L           | 238216   |
| 10.01           | ±0.02       | 60         | DAkkS        | 250 mL         | 238321   |
| 10.01           | ±0.02       | 60         | DAkkS        | 500 mL         | 238223   |
| 10.01           | ±0.02       | 60         | DAkkS        | 3 x 500 mL     | 238923   |
| 10.01           | ±0.02       | 60         | DAkkS        | 10 L           | 238187   |
| 11.00           | ±0.05       | 24         | Hamilton     | 500 mL         | 238278   |
| 12.00           | ±0.05       | 24         | DAkkS        | 500 mL         | 238279   |
| 12.00           | ±0.05       | 24         | DAkkS        | 10 L           | 10165246 |
| 4.01/7.00/9.21  | ±0.01/±0.02 | 24/60      | DAkkS        | 500 mL, mixed  | 238922   |
| 4.01/7.00/10.01 | ±0.01/±0.02 | 24/60      | DAkkS        | 500 mL, mixed  | 238924   |

## ORP Buffers

| Value  | Accuracy | Stability* | Certified By | Packaging Unit | REF    |
|--------|----------|------------|--------------|----------------|--------|
| 271 mV | ±5 mV    | 24         | None         | 500 mL         | 238228 |
| 475 mV | ±5 mV    | 24         | None         | 250 mL         | 238322 |
| 475 mV | ±5 mV    | 24         | None         | 500 mL         | 238227 |

\*In months after date of manufacturing

Simple handling for professional results

### Step 1 Open bottle



### Step 2 Fill calibration compartment




### Step 3 Calibrate electrode



### Step 4 Empty calibration compartment



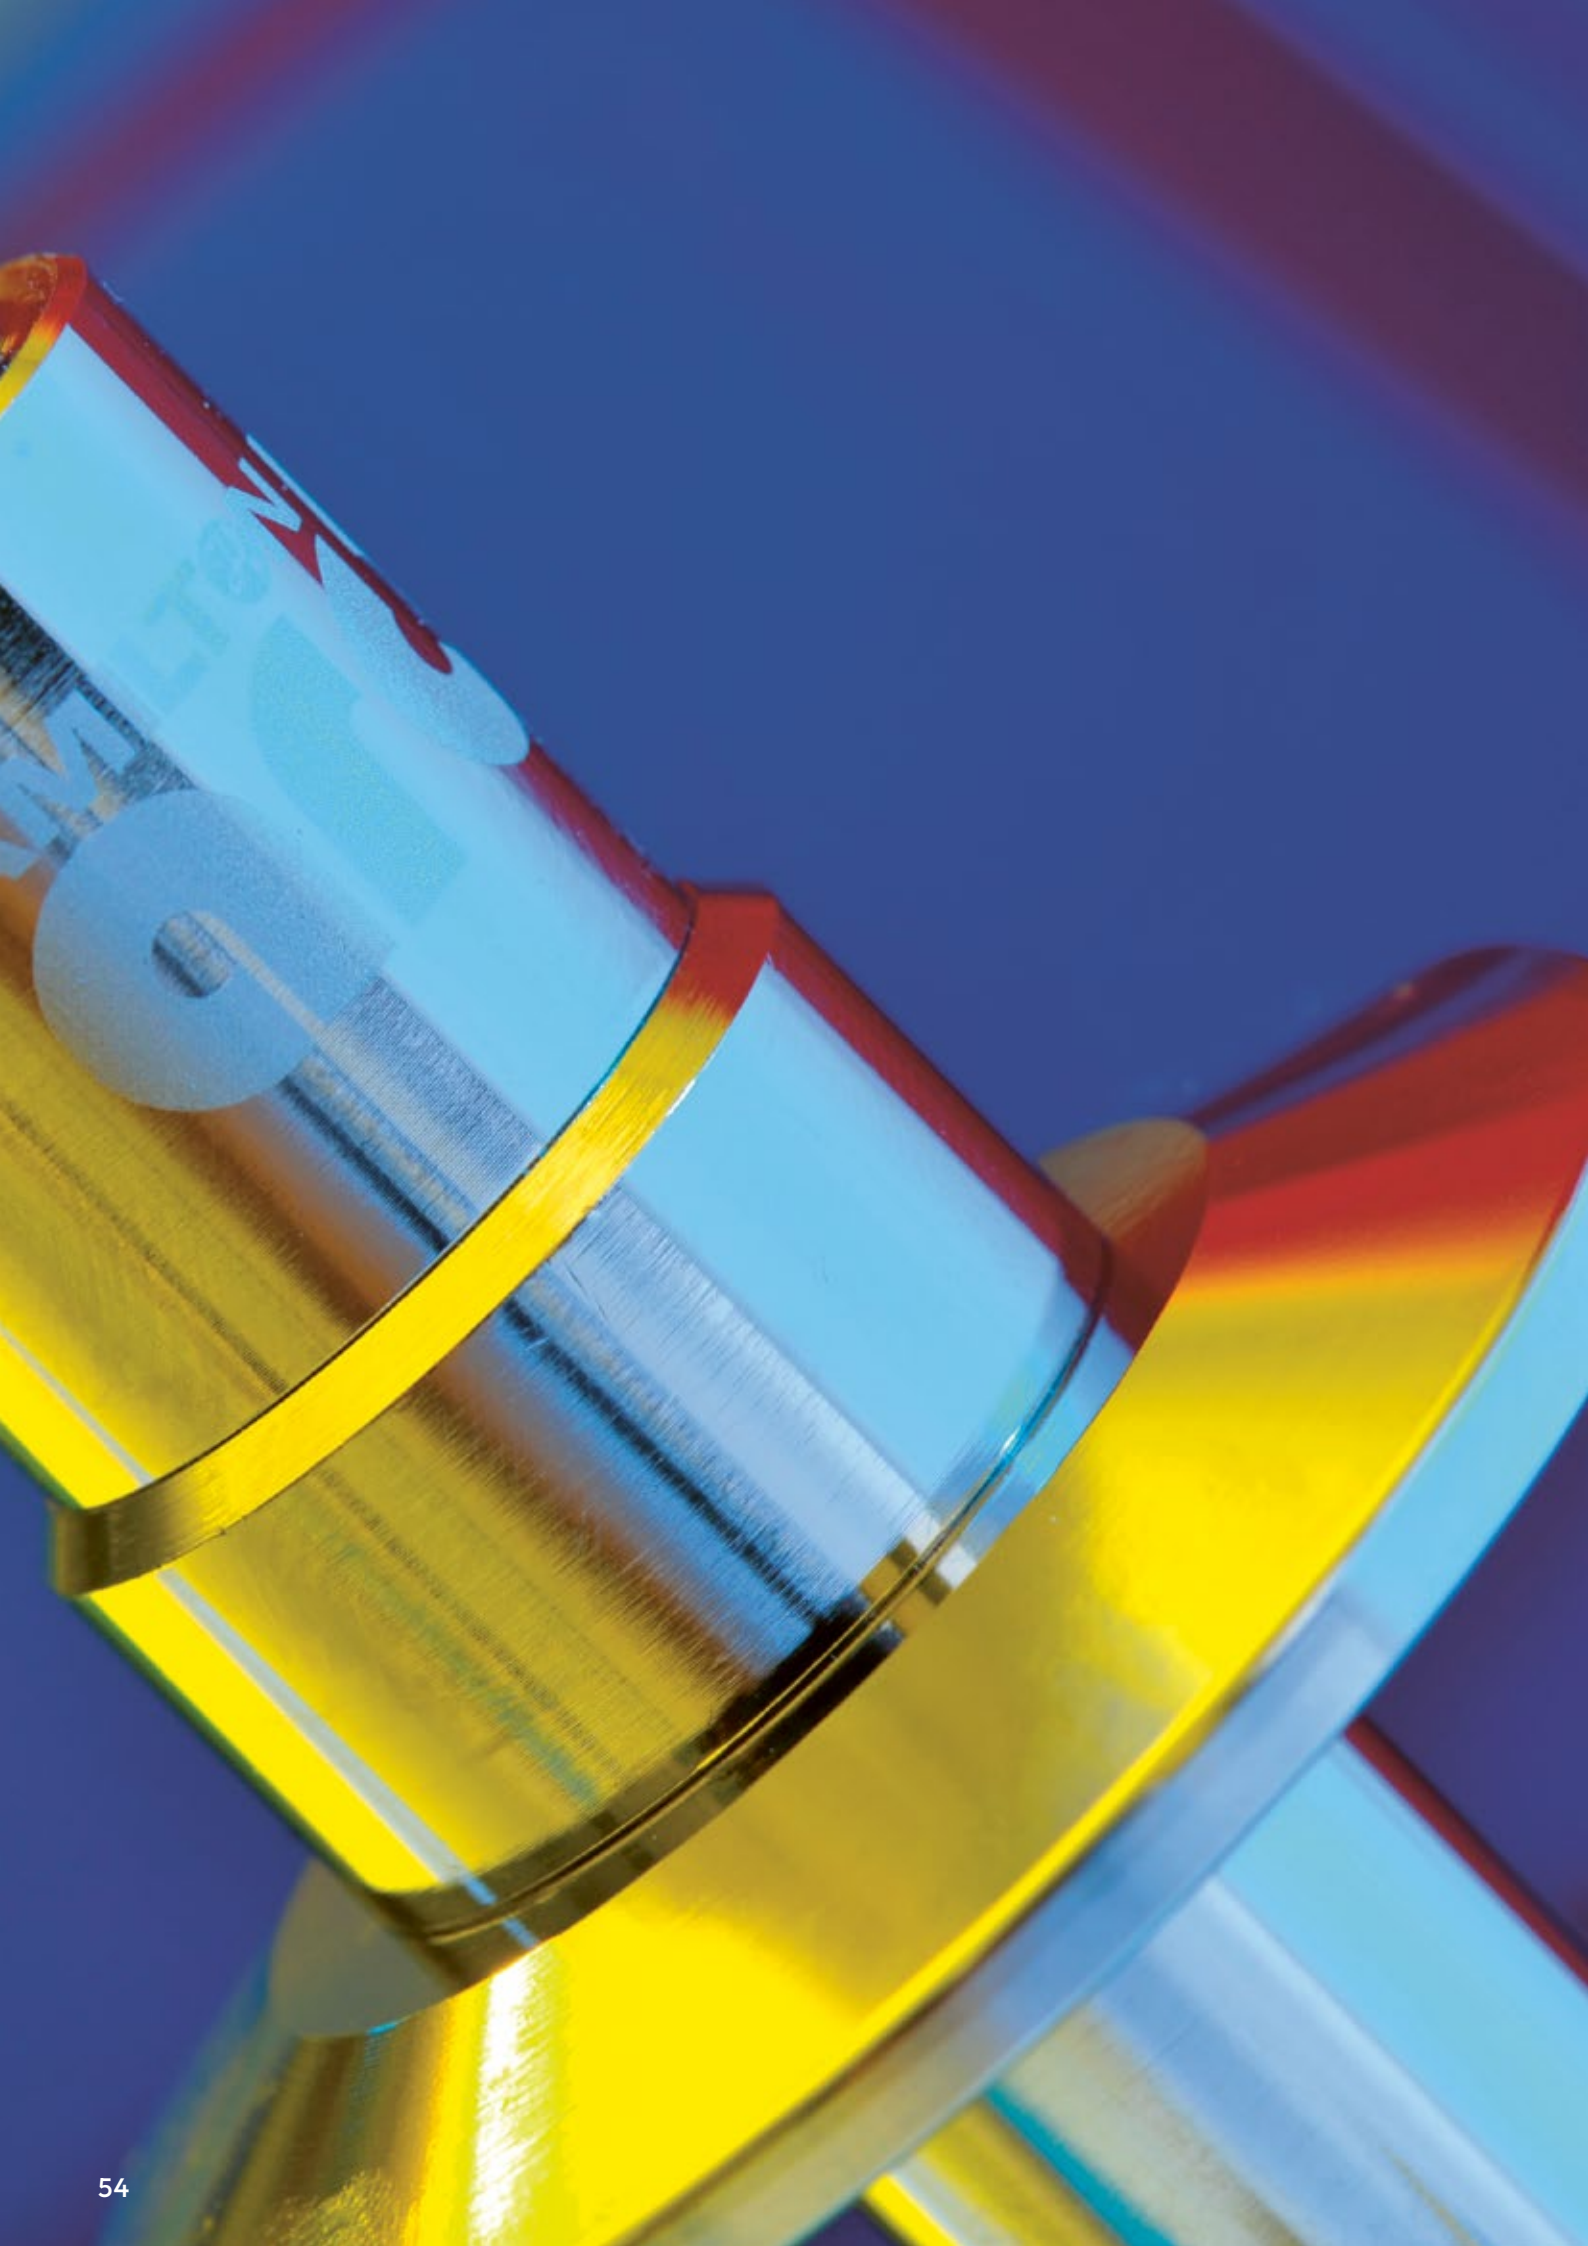

# Cond

## Conductivity Sensors

The electrical conductivity is important for the characterization of liquids in various processes. In aqueous solutions the conductivity is caused by the decomposition of dissolved acids, bases or salts into positively charged cations and negatively anions. In ultra-pure water, where ions are absent, except a few  $H_3O^+$  and  $OH^-$ , are present, the conductivity is extremely low. This intrinsic conductivity of water represents the lower border of the conductivity scale.

The electrical conductivity is determined by a resistivity measurement when an alternating voltage is applied to a measurement cell that consists of two or four electrodes. To compensate for the geometry of the conductivity cell a cell constant is used. This constant is either known or determined by means of conductivity standards.

Electrical conductivity is the reciprocal of electrical resistivity, and measures a material's ability to conduct an electric current. Its SI unit is Siemens per meter (S/m). For the measurement of the conductivity of a solution it's common to use  $\mu S/cm$  or  $mS/cm$ .

| Sensor           | Feature   | Biopharma  |                      |             |            | Chempharma      |                   |             | Food & Beverages | Water / Wastewater | Ultra Pure Water |
|------------------|---|------------|----------------------|-------------|------------|-----------------|-------------------|-------------|------------------|--------------------|------------------|
|                  |   | Single-Use | Media Prep, Upstream | CIP Station | Downstream | Product Quality | Water Preparation | CIP Station | CIP Station      |                    |                  |
| Conducell 4UxF   | <ul style="list-style-type: none"><li>Flexible process connections</li><li>High robustness</li><li>Wide measuring range and good linearity across whole range</li></ul>   |            | ✓                    | ✓           | ✓          | ✓               |                   | ✓           | ✓                |                    |                  |
| Conducell SU     | <ul style="list-style-type: none"><li>Ready to use and precalibrated</li><li>Gamma sterilizable</li><li>Ready to integrate in single-use bags</li><li>Seamless integration with Hamilton Arc technology</li></ul>         | ✓          |                      |             |            |                 |                   |             |                  |                    |                  |
| Conducell 4US    | <ul style="list-style-type: none"><li>High robustness</li><li>Wide measuring range and good linearity across the whole range</li><li>No housing required, comes with standard TC 1.5" or G125 Ingold connection</li></ul> |            |                      | ✓           |            |                 |                   |             | ✓                |                    |                  |
| Conducell UPW    | <ul style="list-style-type: none"><li>Fully compliant with USP 645, EP and JP</li><li>Wide operating temperature and pressure</li><li>Seamless integration with Hamilton Arc technology</li></ul>                         |            |                      |             |            |                 | ✓                 |             |                  |                    | ✓                |
| Conducell 2DC-PG | <ul style="list-style-type: none"><li>Wide operating temperature and pressure</li><li>Easy submersion beneath liquid surface</li></ul>  |            |                      |             |            |                 |                   |             |                  | ✓                  |                  |



# Conducell 4UxF



The Conducell 4UxF is capable of measuring a broad range of conductivity (from 1 to 500'000 µS/cm (Analog) and 1 to 300'000 µS/cm (Arc)), making it suitable for both low and high conductivity measurements.

All wetted parts (DIN 1.4435, PEEK, EPDM) are FDA compliant and are CIP, SIP and autoclaving compatible, with good linearity.

Hamilton offers Conducell 4UxF sensors made from different materials which are suitable for various applications and come in Traditional or Arc models.

### Benefits

- Can measure a broad range of conductivity (trace – very high)
- Real-time self-diagnostic capabilities
- FDA compliant and suitable for CIP, SIP and autoclaving
- Compatible with wired or wireless transmission
- Customisable to your application

### Typical applications

- CIP monitoring
- BioPharma upstream (media preparation)
- Downstream (buffer mixing, chromatography, filtration)
- ChemPharma (phase separation and product quality)



| Specifications                          |   |
|---|---|
| Measuring range                         | Arc: 1 µS/cm to 300 mS/cm<br>Analog: 1 µS/cm to 500 mS/cm   |
| Measurement principle                   | 4 pole contacting   |
| Process temperature                     | Analog: -20 to 150 °C<br>Arc: 0 to 110 °C (analog interface),<br>0 to 140 °C (digital interface)  |
| Pressure range<br>(relative to ambient) | 0 to 20 bar g (135 °C)<br>0 to 10 bar g (150 °C)  |
| Sterilization / cleaning<br>method      | Autoclavable, CIP, SIP  |
| Cell constant                           | 0.36/cm   |
| Material of electrodes                  | x = S: Stainless steel 1.4435<br>x = H: Hastelloy C 2.4602<br>x = T: Titanium<br>x = Pt: Platinum |
| O-ring                                  | EPDM (other versions available on<br>request)   |

Accessories

Conductivity Standards → 66




Cables → 106

Arc Accessories → 115

Housings → 123

Service & Support → 164

For more specifications see [www.hamiltoncompany.com](http://www.hamiltoncompany.com)

| Ordering Information            |   |   |                    |                      |                 |  |
|---------------------------------|---|---|--------------------|----------------------|-----------------|--|
| Conducell 4UxF Family Structure |   |   |                    |                      |                 |  |
| 243590                          | Code  |   | Electrode Material |                      |                 |  |
|                                 | 1   | Stainless Steel 1.4435  |                    |                      |                 |  |
|                                 | 2   | Platinum (not for Triclamp)   |                    |                      |                 |  |
|                                 | 3   | Stainless Steel 2.4602  |                    |                      |                 |  |
|                                 | 4   | Titanium (not for Triclamp)   |                    |                      |                 |  |
|                                 |  | Code  |                    | Electrical Connector |                 |  |
|                                 |   | 1   | Arc                |                      |                 |  |
|                                 |   | 2   | VP 🇪🇺              |                      |                 |  |
|                                 |   |  | Code               |                      | a-length (mm)   |  |
|                                 |   |   | 1                  | 120 (PG13,5)         |                 |  |
|                                 |   |   | 2                  | 225 (PG13,5)         |                 |  |
|                                 |   |   | 3                  | 325 (PG13,5)         |                 |  |
|                                 |   |   | 4                  | 425 (PG13,5)         |                 |  |
|                                 |   |   | 5                  | 30 (PG13,5)          |                 |  |
|                                 |   |   | 6                  | 60 (PG13,5)          |                 |  |
|                                 |   |   | 7                  | 21 - Triclamp 1.5"   |                 |  |
|                                 |   |  | Code               |                      | O-ring Material |  |
|                                 |   |   | 1                  | EPDM                 |                 |  |
|                                 |   | 243590 –  |                    |                      |                 |  |



| Ordering Information |          |                 |
|----------------------|----------|-----------------|
|                      | a-length | VP6             |
| Conducell 4USF-VV    | 3        | 237640 (non Ex) |



# Conducell SU



Hamilton’s single-use conductivity monitoring system is comprised of the reusable Arc Module Cond-P SU and a single-use sensor patch Conducell-P SU. The Conducell-P SU is integrated within the single-use container by the container manufacturer.

Unlike other single-use conductivity solutions, Hamilton’s reusable Arc Module enables a compact and cost-effective measurement solution without sacrificing accuracy or precision. A standard measuring loop consists of a sensor element (Conducell-P SU), which is connected directly to the electronic (Arc Module Cond-P SU) to enable disturbance free measurement signals.

### Benefits

- Suitable for low and high conductivity measurements (100 µS/cm to 300’000 µS/cm)
- Certified bio-compatibility, perfect for single-use biopharma applications
- Ready to integrate in single-use bags
- Pre-calibrated

### Typical applications

- Single use mixing bags for buffer preparation
- Virus inactivation and intermediate storage



| Specifications                       |   |
|--------------------------------------|---|
| Measuring range                      | 0.1 to 300 mS/cm                                      |
| Measurement principle                | 4 pole contacting                                     |
| Process temperature                  | 4 to 50 °C  |
| Pressure range (relative to ambient) | 0 to 1 bar g  |
| Sterilization method                 | Gamma irradiation, up to 50 kGy (for the disposables) |
| Suitable for gamma irradiation       | No  |
| Cell constant                        | 1.31/cm   |
| Material of electrodes               | Pt = Platinum   |

For more specifications see [www.hamiltoncompany.com](http://www.hamiltoncompany.com)

«Did you know... that with the reuseable Arc Module and the precalibrated sensor a ready to use system can be achieved?»

The Arc Module Cond-P (in combination with the Conducell-P SU) enables precise conductivity measurement in single-use bags.



| Ordering Information |                |
|----------------------|----------------|
| Arc Module Cond-P SU | Conducell-P SU |
| 10071707             | 10076677       |

### Accessories

- Conductivity Standards → 66
- Cables → 106
- Arc Accessories → 115
- Service & Support → 164

# Conducell 4US

Cond

The Conducell 4US is ideal for measuring a broad range of conductivity (from 0.1 to 500'000 µS/cm) with superior accuracy, resolution, and temperature compensation.

All wetted parts are FDA compliant and suitable for biopharma application (DIN 1.4435, PEEK, EPDM).

The Conducell 4US data works with a Traditional output.

### Benefits

- All of your conductivity needs in one sensor: capable of measuring a broad range of conductivity
- All wetted parts are FDA compliant and suitable for biopharma application
- No need for separate housing, already integrated


### Typical applications

- CIP monitoring
- Fermentation



| Specifications                       |  |
|--------------------------------------|--|
| Measuring range                      | 0.1 µS/cm to 500 mS/cm                     |
| Measurement principle                | 4 pole contacting                          |
| O-ring position                      | 22 to 55 mm                                |
| Process temperature                  | -20 to 135 °C                              |
| Pressure range (relative to ambient) | 0 to 6 bar g                               |
| Sterilization / cleaning method      | CIP, SIP                                   |
| Cell constant                        | 0.147/cm                                   |
| Material of electrodes               | Stainless steel 1.4435                     |
| O-ring                               | EPDM (other versions available on request) |

For more specifications see [www.hamiltoncompany.com](http://www.hamiltoncompany.com)

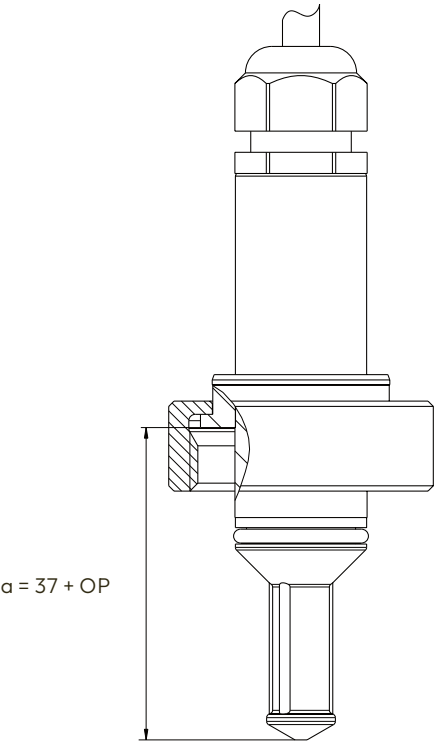

| Ordering Information   |          |               |
|------------------------|----------|---------------|
|                        | a-length | 5 m fix cable |
| Conducell 4US-G125     | variable | 237700-OP     |
| Conducell 4US-T150-50  | 50       | 237750        |
| Conducell 4US-T150-100 | 100      | 237760        |

### Accessories

- Conductivity Standards → 66
- Safety Socket → 128
- Service & Support → 164

Flow-through cell PEEK TC 1.5" REF 237931

This flow through cell made of FDA approved PEEK facilitates insertion of Conducell 4US-T150-50 in pipework



# Conducell UPW



The Conducell UPW sensor provides industry-leading, accuracy and sensitivity for producing pure and ultra-pure water in the pharmaceutical industry. The sensor is USP 645, EP, JP and FDA compliant, therefore appropriate for Pharmaceutical and pure water treatment applications.

The Arc model can be directly integrated into standard control systems, eliminating the need for a transmitter. Arc technology allows calibrations, predictive diagnostics, automated documentation, as well as user and process assignment to be stored in the sensor.

The Traditional model is suitable for use in hazardous areas and is ATEX and IECEx approved.

### Benefits

- Industry leading accuracy and precision – exceptional temperature compensation
- Seamless integration
- Easy cleaning – USP 645, EP and JP compliant
- All wetted parts are FDA compliant

### Typical applications

- Ultra Pure Water
- Pure Water
- Water for Injection
- CIP monitoring



| Specifications                       |   |
|--------------------------------------|---|
| Measuring range                      | Arc: 0.01 to 1500 µS/cm<br>Analog: 0.02 to 2000 µS/cm               |
| Measurement principle                | 2 pole contacting   |
| Process temperature                  | Arc: analog interface 0 to 110 °C,<br>digital interface 0 to 130 °C |
| Pressure range (relative to ambient) | 0 to 10 bar g (130 °C)  |
| Sterilization / cleaning method      | Autoclavable, CIP, SIP  |
| Cell constant                        | < 0.1/cm  |
| Material of electrodes               | Stainless Steel DIN 1.4435  |
| Surface quality                      | R <sub>a</sub> < 0.4 µm (N5)  |
| O-ring                               | EPDM (other versions available on request)                          |

For more specifications see [www.hamiltoncompany.com](http://www.hamiltoncompany.com)

«Did you know...  
that with Arc all the  
important information  
is stored in the sensor  
head?»

### Accessories

- Conductivity Standards → 66
- Cables → 106
- Arc Accessories → 115
- Housings → 123
- Service & Support → 164

UPW Simulator  
REF 243580  
Traceable resistor to verify the Arc module  
acc. to USP <645>



UPW Simulator



| Ordering Information  |          |        |        |
|-----------------------|----------|--------|--------|
|                       | α-length | VP6    | Arc    |
| Conducell UPW PG 13.5 | 120      | 243640 | 243579 |
| Conducell UPW TC 1.5" | 87       | -      | 243578 |

# Conducell 2DC-PG



The Conducell 2DC-PG 2-Pole sensor is a low-cost solution for contamination-free processing in the wastewater industry.

Its stable 1.0 cell constant enables measurements from 0 to 20 mS/cm, while its 2-electrode design makes it a cost-effective solution.

The 5 M fixed cable ensures the sensor remains below the liquid surface during operation, while the plastic shaft and graphite electrode are easy to clean. The Conducell 2DC-PG is available with a PG13.5 process connection.

## Benefits

- Suitable for Wastewater Industry applications and is implemented with a PG-35 process connection
- High Accuracy and Cost Effective
- Capable for operating in a wide range of temperature (-5 to 80 °C) and pressure (0 – 6 bar) conditions

## Typical applications


- Water and Wastewater



| Specifications                       |  |
|--------------------------------------|--|
| Measuring range                      | 10 µS/cm to 20 mS/cm                       |
| Measurement principle                | 2 pole contacting                          |
| Process temperature                  | -5 to 80 °C                                |
| Pressure range (relative to ambient) | 0 to 6 bar g                               |
| Cell constant                        | 1/cm                                       |
| Material of electrodes               | Graphite                                   |
| O-ring                               | EPDM (other versions available on request) |

For more specifications see [www.hamiltoncompany.com](http://www.hamiltoncompany.com)

## Accessories

-  [Conductivity Standards → 66](#)
-  [Housings → 123](#)
-  [Service & Support → 164](#)



| Ordering Information |          |               |
|----------------------|----------|---------------|
|                      | α-length | 5 m fix cable |
| Conducell 2DC-PG 120 | 120      | 237610        |





# Hamilton Conductivity Standards



## Long-term stability and accuracy

For measurements in the low conductivity range stable and reliable calibration standards have been completely lacking up to now. Since a conductivity standard is not a buffer solution, the lower the value of the conductivity standard, the greater the effect of entry of CO<sub>2</sub> or contamination. Hamilton is the first manufacturer to offer patented conductivity standards of 1.3 and 5 µS/cm with a certified accuracy of ±1% and a lifetime of 1 and 3 years, respectively. The procedure

for determining conductivity was developed in collaboration with DFM<sup>1</sup>. Many metrological institutes choose Hamilton standards because of their unprecedented stability and independent verification by PTB<sup>2</sup>. During an interlaboratory test among prestigious European metrological institutes (PTB, DFM, DAkkS<sup>3</sup>) Hamilton standards were used as measurement solutions.

## Hamilton is Different

Hamilton offers conductivity standards whose stability of ±1% is guaranteed over a lifetime of up to 3 years. They can be used repeatedly under the condition that the bottle is not left open for more than 1 hour in total.

A representative number of bottles from every batch are measured by DFM. Their value is recorded on the calibration certificate and on every bottle. DFM enjoys the highest prestige in Europe in the area of electrolytic conductivity and is equipped with an absolute measurement cell that was developed in collaboration with NIST, and is accredited by the Danish accreditation agency DANAK to a conductivity of 0.9 µS/cm. DFM and NIST<sup>4</sup> have made comparisons of their measurement uncertainty and have confirmed in a series of scientific publications that the measurement

accuracy is in each case the same. Because no primary standards exist in the low conductivity range, measurements depend on absolute measurement cells which trace electrical conductivity back to the SI units: meter and volt. Testing of Hamilton standards is thus carried out on the most precise measurement apparatus in the world, and certified accordingly.

<sup>1</sup> DFM: Danish Institute of Fundamental Metrology, Denmark  
<sup>2</sup> PTB: Physikalisch-Technische Bundesanstalt, Braunschweig  
<sup>3</sup> DAkkS: Deutsche Akkreditierungsstelle  
<sup>4</sup> NIST: National Institute of Standards and Technology, Gaithersburg MD, USA


### Unique advantages

- Remains stable for a minimum of 1 year for 1.3 µS/cm, and up to 3 years for all other values
- Certificate with calibration document from DFM (available at [www.hamiltoncompany.com](http://www.hamiltoncompany.com))
- Expiration date shown on every bottle
- Bottles are permitted to stay open for a total of 60 minutes



### Stability of the Hamilton 5µS/cm Conductivity Standard over 36 months

Check measurement by PTB<sup>2</sup>

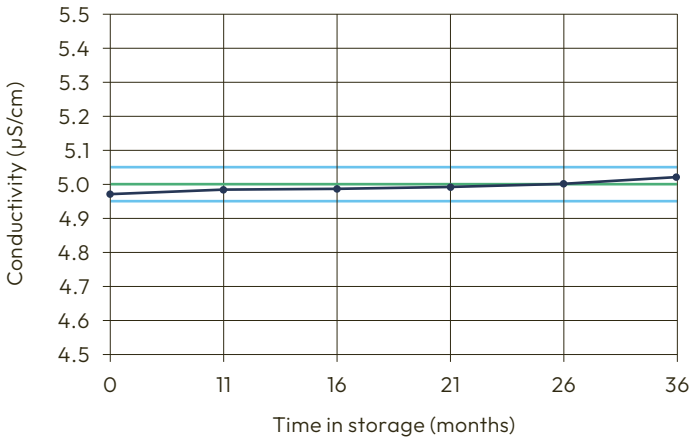

| Value at 25°C | Accuracy | Stability* | Certificate From | Packaging Unit | Volume | REF    |
|---------------|----------|------------|------------------|----------------|--------|--------|
| 1.3 µS/cm     | ±1%      | 12         | DFM              | Glass bottle   | 250 mL | 238973 |
| 5 µS/cm       | ±1%      | 36         | DFM              | Glass bottle   | 250 mL | 238926 |
| 15 µS/cm      | ±1%      | 36         | DFM              | Glass bottle   | 250 mL | 238927 |
| 84 µS/cm      | ±1%      | 18         | DFM              | Calpack bottle | 500 mL | 238984 |
| 100 µS/cm     | ±1%      | 36         | DFM              | Glass bottle   | 250 mL | 238934 |
| 147 µS/cm     | ±1%      | 18         | DFM              | Calpack bottle | 500 mL | 238985 |
| 706 µS/cm     | ±2%      | 36         | Hamilton         | Glass bottle   | 250 mL | 238929 |
| 1413 µS/cm    | ±1%      | 36         | DFM              | Glass bottle   | 250 mL | 238928 |
| 1413 µS/cm    | ±1%      | 18         | DFM              | Calpack bottle | 500 mL | 238986 |
| 12880 µS/cm   | ±1%      | 18         | DFM              | Calpack bottle | 500 mL | 238988 |
| 100 mS/cm     | ±1%      | 36         | DFM              | Glass bottle   | 250 mL | 238935 |

\*In months after date of manufacturing



VCD

TCD

Cell Density Sensors

Biological processes are increasingly important in biotechnical and pharmaceutical industries. The variability of living organisms is often very high, making the culture process difficult to standardize. Extensive process optimization and control are required for stable cell cultures, fermentations and improved yield. Today bioprocess development relies on labor intensive sampling and offline measurements that also lack the necessary granularity to fully optimize the yield. The available on-line measurements of pH and dissolved oxygen are not linked to the cell status and characteristics.

On-line monitoring of cell density provides the continuous information necessary to optimize control and yield beyond what is possible off-line. Hamilton now offers sensors for continuous cell density measurement. The Incyte Arc permittivity sensor delivers information on viable cell density whereas the Dencytee sensor measures total cell density via turbidity. In combination with our advanced Arc pH and dissolved oxygen probes, permittivity and turbidity sensors provide all relevant information on the process of mammalian, yeast and high density bacteria cultures. This enables better understanding and control.

| Sensor       | Feature  | Cultivated Food                      | Biopharma  |              | Brewery |
|--------------|--|--------------------------------------|--|--------------|---------|
|              |  | • Cell Culture<br>• Yeast<br>• Algae | • Cell Culture<br>• Yeast<br>• Bacteria<br>• Algae | • Single-Use | • Yeast |
| Incyte SU    | • Wave bioreactor applications<br>• Suitable for gamma irradiation / ready to use<br>• VCD (Viable Cell Density)<br>• Insensitive to micro-carrier / cell debris |                                      |  | ✓            |         |
| Incyte Arc   | • VCD (Viable Cell Density)<br>• Insensitive to micro-carrier / cell debris  | ✓                                    | ✓  |              | ✓       |
| Dencytee Arc | • TCD (Total Cell Density)<br>• Perfect linearity over whole process   | ✓                                    | ✓  |              | ✓       |

# Incyte Arc



When used on-line, the Incyte Arc sensor delivers real-time viable cell density measurements for deeper process insights and data driven process optimization and control.

Incyte Arc is Hamilton’s next-generation viable cell density sensor, offering high-fidelity permittivity measurements comes now paired with integrated microtransmitters that leverage ArcAir technology. Arc Wi 2G Adapter BT (REF 243470) is required to output an analog 4-20 mA signal from the digital Modbus communication. Arc Wi 1G Adapter BT (REF 242360) is required with Arc Modbus OPC Converter (REF 10089359) to enable an OPC communication.

### Benefits

- Never miss an important event during your bioprocess by measuring viable cell density
- Gain deeper process insights e.g., cell size & morphology
- Determine viability in real-time for data-driven process optimization

### Typical applications

- Eucaryotic cells
- Viability prediction possible



| Specifications                  |   |
|---------------------------------|---|
| Measuring range                 | 5 x 10 <sup>5</sup> to 8 x 10 <sup>9</sup> cells/mL (Mammalian) |
| Conductivity range              | 0.5 to 80 mS/cm   |
| Measuring principle             | Permittivity  |
| Process temperature             | 0 to 60 °C  |
| Pressure range                  | 0 to 12 bar   |
| Sterilization / cleaning method | Autoclavable, CIP, SIP  |
| O-ring                          | EPDM  |

For more specifications see [www.hamiltoncompany.com](http://www.hamiltoncompany.com)

«Did you know...  
Incyte Arc is now part of the Hamilton Arc family providing a digital Arc Modbus signal directly from the sensor?»



| Ordering Information |          |             |
|----------------------|----------|-------------|
|                      | a-length | Arc         |
| Incyte Arc Expert    | 120      | 243950-0211 |
|                      | 220      | 243950-0212 |
|                      | 320      | 243950-0213 |
|                      | 420      | 243950-0214 |

### Accessories

- Cables → 106
- Arc Accessories → 115
- Housings → 123
- Service & Support → 164

Conductivity standard for verification  
12880 µS/cm, Basic Line  
[REF 238988](#)

Solution B for Incyte Arc e-conditioning  
[REF 243742](#)





# Incyte SU



Hamilton’s Incyte SU sensors are ready-to-use and pre-calibrated for single use, on-line applications. Collect real-time viable cell density measurements for deeper process insights and data driven process optimization and control.

Analyzing cell characteristics online provides deep insight into the bioprocess. It allows stable process control, fast optimization and reduces the risk of sampling errors. The Incyte SU sensor is especially designed for measuring viable cells during mammalian cell culture, yeast and high density bacterial fermentation.

The measurement principle of Incyte sensors is based on permittivity. Viable cells behave like little capacitors and their polarization and depolarization in an alternating electrical field is measured. This signal can be correlated to the viable cell density. This method is insensitive to cell debris and microcarriers because only viable cells can be polarized.

A measuring Unit consists of an sensor element (Incyte-P SU) and an electronic (Arc Module Incyte-P SU), which converts the analog measurement to a stable digital signal.



### Benefits

- Never miss an important event during your bioprocess by measuring viable cell density
- Gain deeper process insights e.g., cell size & morphology
- Patches come ready-to-use and pre-calibrated for wave version and steering tank

### Typical applications

- Eucaryotic cells
- High density yeast fermentation
- High density bacteria fermentation

| Specifications                       |   |
|--------------------------------------|---|
| Measuring range                      | 5 x 10 <sup>5</sup> to 8 x 10 <sup>9</sup> cells/mL (Mammalian) |
| Conductivity range                   | 1 to 50 mS/cm   |
| Measuring principle                  | Permittivity  |
| Process temperature                  | 4 to 50 °C  |
| Pressure range (relative to ambient) | 0 to 1 bar g  |
| Sterilization / cleaning method      | Gamma irradiation up to 50 kGy (for the disposables)            |
| Material of electrodes               | Platinum  |

For more specifications see [www.hamiltoncompany.com](http://www.hamiltoncompany.com)

### Accessories

- [Conductivity Standards → 66](#)
- [Cables → 106](#)
- [Arc Accessories → 115](#)
- [Service & Support → 164](#)

«Did you know... that Hamilton is the only provider of all relevant parameters in single use and re-usable technology for cell culture & fermentations: viable cell density, pH and DO?»



| Ordering Information |                        |                        |             |
|----------------------|------------------------|------------------------|-------------|
|                      | Arc Module Incyte-P SU | Arc Module Incyte-W SU | Incyte-P SU |
|                      | 10073158               | 10087686               | 10076676    |





# Dencytee Arc



Hamilton’s Dencytee Arc sensor is an on-line optical Transmittance and Reflectance sensor capable of accurately measuring the total cell density of cultures from 0-200 g/L.

All particles and molecules that scatter light at 860 nm will be detected, including living and dead cells as well as cell debris. The sensor is also very effective after inoculation when cells are expanding quickly but concentrations are low, making capacitance-based readings less reliable.

Dencytee Arc sensors provide a robust connection directly to the Process Control System without the need for an additional external transmitter.

The combination of Incyte Arc and Dencytee Arc can deliver viability information of your bioprocess.

### Benefits

- 1% accuracy over the whole measuring range from 0 to 200 g/L
- Never miss an important event during your bioprocess
- Robust design adapts to changes in ambient light and temperature
- Easy air verification with our Maintenance Tool Kit

### Typical applications

- Yeast & Bacteria processes
- Algae processes



| Specifications      |   |
|---------------------|---|
| Measuring range     | e.g. 0 to 200g/l cell dry weight yeast<br>0 to 4 AU<br>0 to 30'000 NTU                              |
| Measuring principle | Transmission and Reflection<br>(incl. temperature compensation,<br>daylight filter and subtraction) |
| Wavelength          | 860 nm  |

For more specifications see [www.hamiltoncompany.com](http://www.hamiltoncompany.com)

### Accessories

- Cables → 106
- Arc Accessories → 115
- Housings → 123
- Service & Support → 164

Dencytee Maintenance Tool Kit for easy sensor verification  
[REF 10146924](#)

«Did you know... to be able to measure low and high cell density at a high quality signal the sensor is able to measure the transmitted as well as the reflected light of the cells.»



| Ordering Information |          |             |
|----------------------|----------|-------------|
|                      | a-length | Arc         |
| Dencytee RS485       | 120      | 10064919-11 |
|                      | 225      | 10064919-12 |
|                      | 325      | 10064919-13 |
|                      | 425      | 10064919-14 |





CO<sub>2</sub>

## CO<sub>2</sub> Sensors

Dissolved carbon dioxide (DCO<sub>2</sub>) is a critical process parameter (CPP) in biopharma production processes according to Process Analytical Technology (PAT) guidelines. By influencing other parameters such as extracellular and intracellular pH, it has an effect on different metabolic pathways which are involved in cell growth or in product formation and quality.

In the past, continuous in-line monitoring of DCO<sub>2</sub> has only been possible through electrochemical sensors that are based on the Severinghaus principle and measure the DCO<sub>2</sub> concentration indirectly. The result is significant maintenance effort and multiple sources of drift that must be compensated by time-consuming product calibration.

Now, Hamilton has introduced a completely new way to measure DCO<sub>2</sub>: The in-line sensor CO<sub>2</sub>NTROL is a maintenance-free, solid-state sensor that directly measures DCO<sub>2</sub> resulting in better measurement accuracy and lower cost of ownership.

# CO<sub>2</sub>NTROL



Hamilton’s CO<sub>2</sub>NTROL is a solid-state sensor (no electrolyte) that directly measures DCO<sub>2</sub> and provides maintenance-free (no consumables), real-time, and in-line control of this important critical process parameter.

Automated control of DCO<sub>2</sub> enables increased titer, better batch-to-batch reproducibility, and more consistency from R&D to production-scale bioreactors.

### Benefits

- Automated control of DCO<sub>2</sub> in bioproduction
- Maintenance-free (save cost and time)
- Simple calibration

### Typical applications

- Biopharma cell cultures and fermentations

«Did you know... Hamilton is the first and only supplier to bring the maintenance-free optical IR technology into a SIP/CIP compliant 12mm CO<sub>2</sub> sensor.»



| Specifications                  |   |
|---------------------------------|---|
| Measurement principle           | Optical – CO <sub>2</sub> Absorption in Middle Infrared (MIR)   |
| Measuring range                 | 5 to 1000 mbar<br>or 0.5 to 100 %-Vol<br>or 7.5 to 1500 mg/L (in liquid phase at 101.3 kPa and 25 °C) |
| Diameter                        | 12 mm   |
| Process connection              | PG 13.5   |
| Wetted parts                    | Stainless Steel 1.4435, EPDM (Ethylene propylene elastomer)<br>FDA compliant silicone                 |
| Surface quality                 | Ra < 0.4 µm (N5)  |
| Sterilization / cleaning method | Autoclavable, CIP, SIP  |
| Operating temperature range     | -10 to 140°C; the sensor provides no CO <sub>2</sub> reading above 60°C                               |

For more specifications see [www.hamiltoncompany.com](http://www.hamiltoncompany.com)

### Accessories

- Cables → 106
- Arc Accessories → 115
- Housings → 123
- Service & Support → 164

Calibration Station  
[REF 243575](#)




| Ordering Information        |          |             |
|-----------------------------|----------|-------------|
|                             | a-length | Arc         |
| CO <sub>2</sub> NTROL RS485 | 120 mm   | 10087810-11 |
|                             | 160 mm   | 10087810-12 |
|                             | 225 mm*  | 10087810-13 |
|                             | 325 mm   | 10087810-14 |
|                             | 425 mm   | 10087810-15 |

\*CO<sub>2</sub>NTROL 225 has, in reality, a shaft length of 215 mm. This ensures optimal rinsing in replaceable housings, such as Retractex.





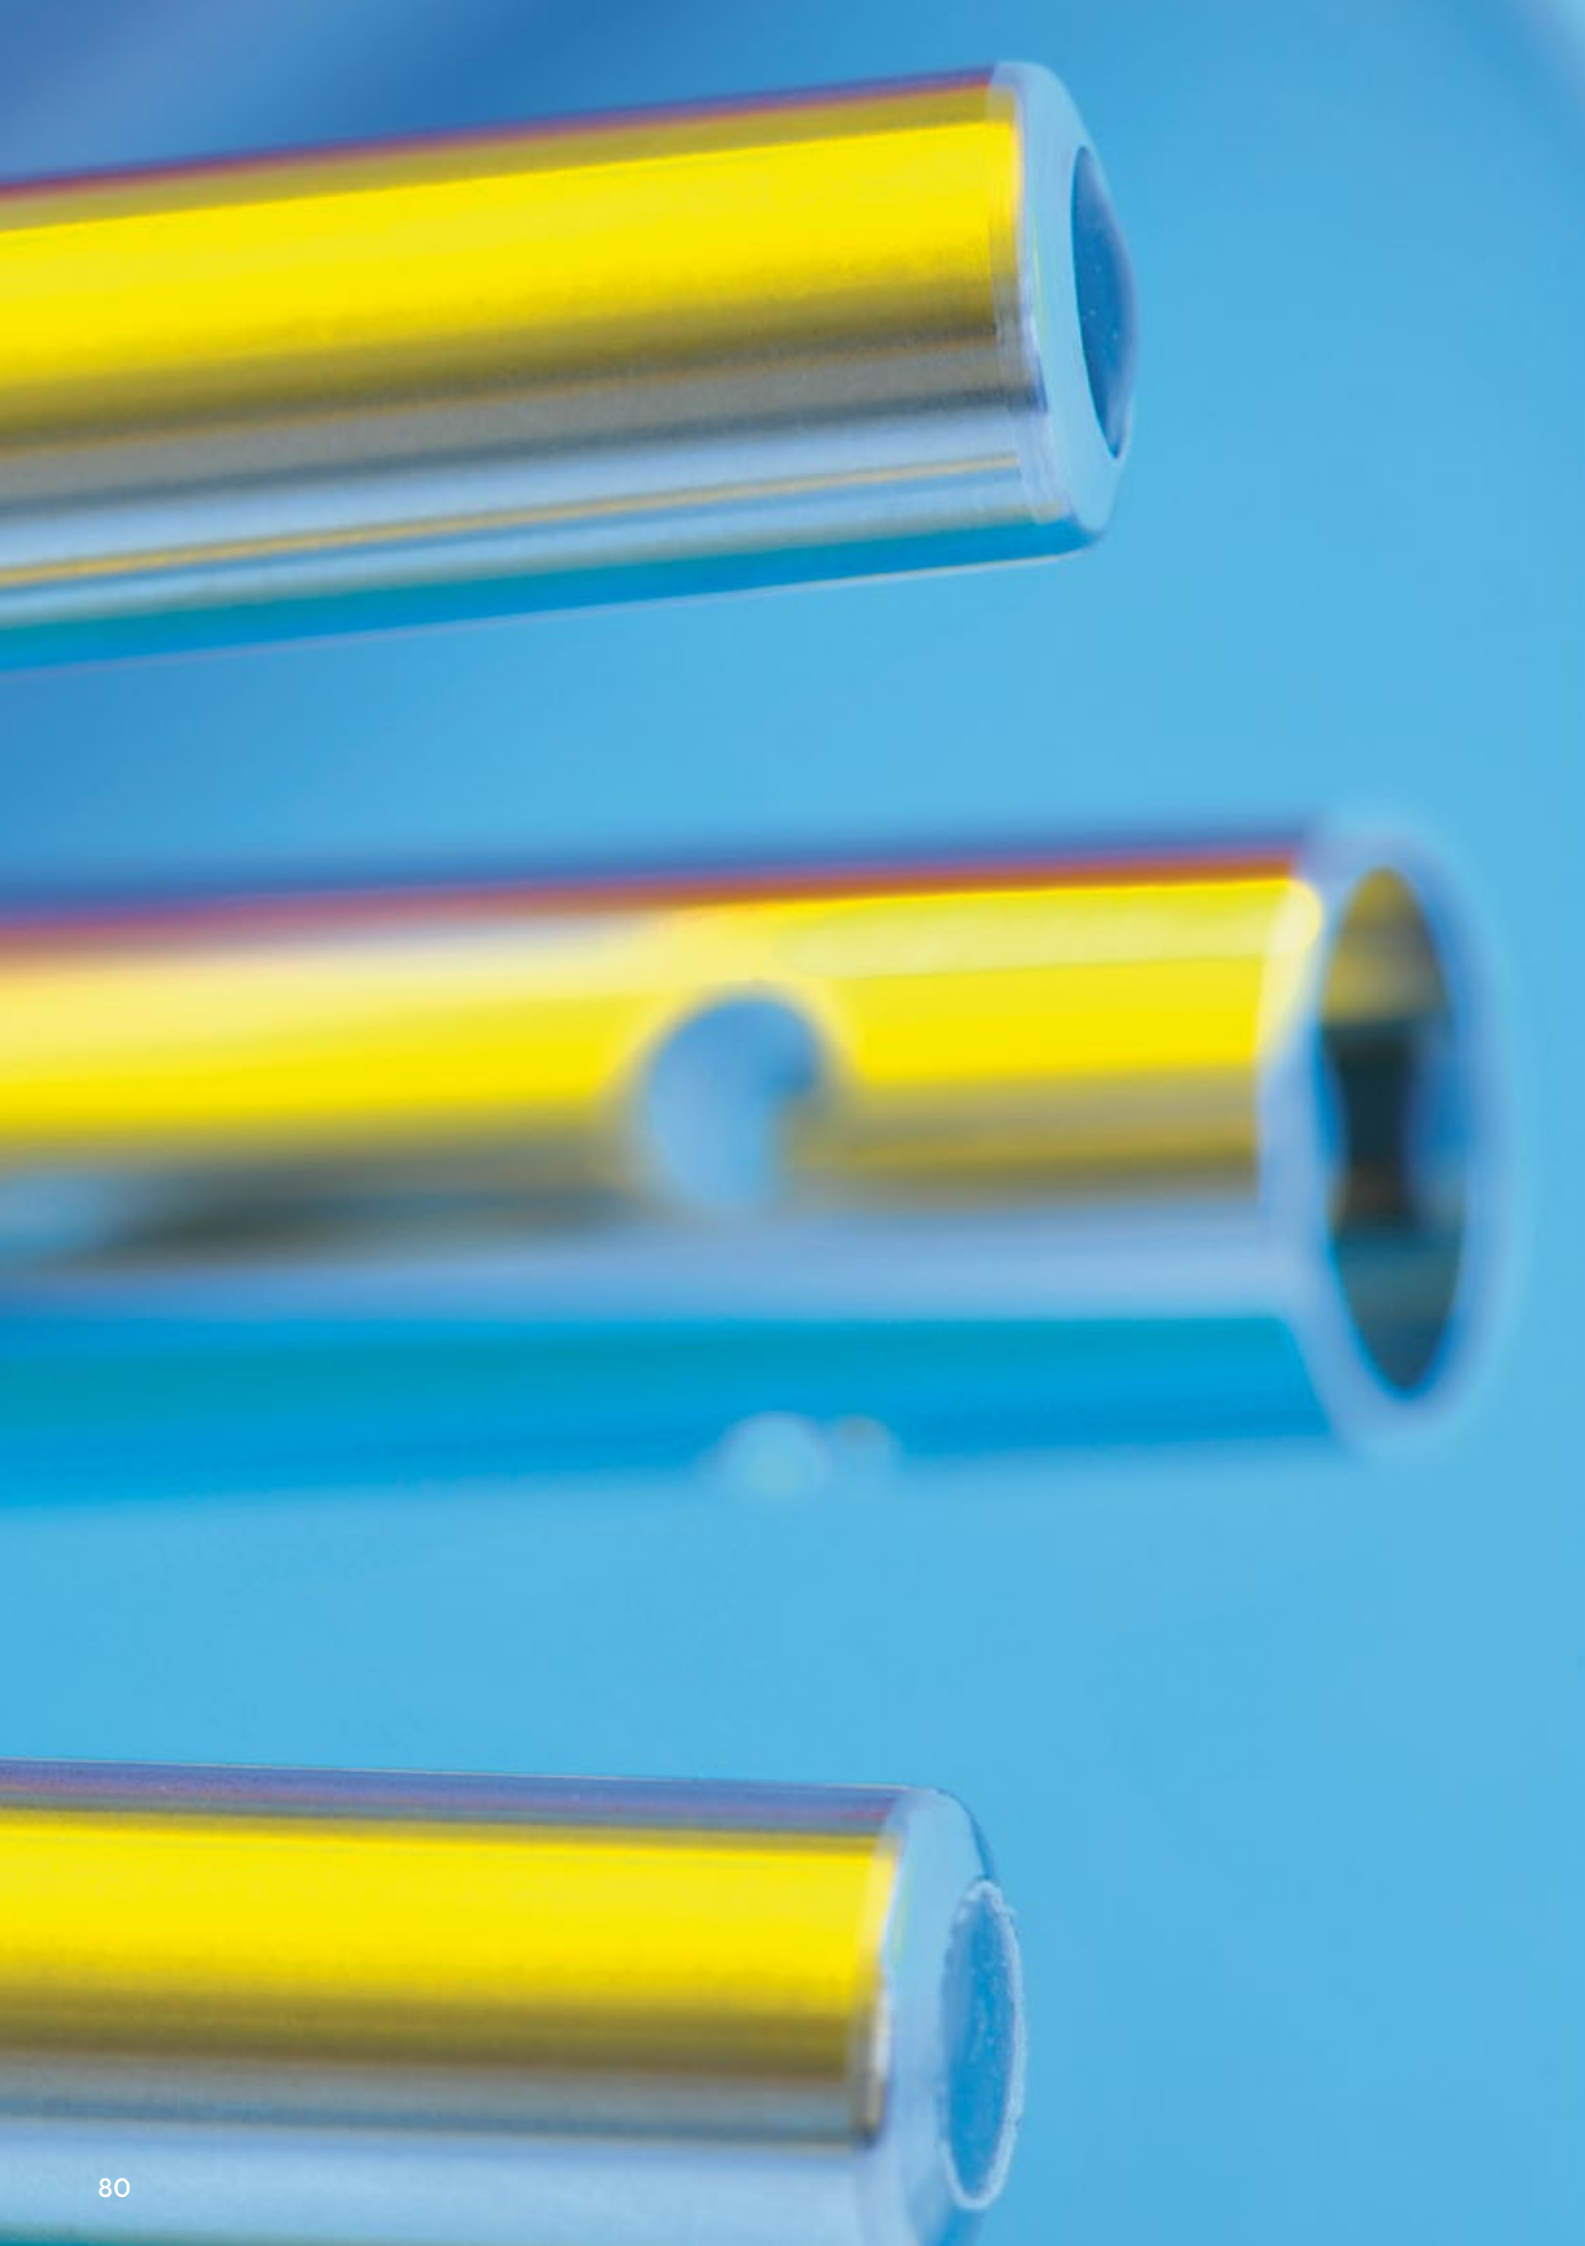

DO Sensors

The partial pressure of dissolved oxygen (DO) plays an important role in many biological, chemical and physical processes. The amount of dissolved oxygen is also important for the safety and the quality of many other industrial processes.

The most common technologies to measure DO are the classical amperometric and the modern optical method. Classical amperometric Clark cells, where cathode and anode are separated from the sample by a gas permeable membrane, generate an electrical current proportional to the oxygen partial pressure of dissolved oxygen. The oxygen is reduced in the sensor, catalyzed by an electrolyte at a platinum cathode. At the anode silver is oxidized. In contrast to the Clark cells the optical measurement is based on the luminescence of a luminophore that absorbs photons and releases a part of the absorbed energy by emission of photons with a higher wavelength. Oxygen quenches this process by transferring the energy partially by collision. The more oxygen present the more quenching is observed. Hamilton measures the phase shift between excitation and emission across a population of light pulses in order to achieve the highest accuracy and widest operating range. The difference in the intensity of both waves is used for online sensor diagnostics.

| Optical DO Sensors      | Feature  | Biopharma / Biotech |          | Chempharma | Boiler Feed Water<br>Power Plant | Wastewater | Brewery and<br>Beverages |
|-------------------------|--|---------------------|----------|------------|----------------------------------|------------|--------------------------|
|                         |  | Single-Use          | Reusable |            |                                  |            |                          |
| VisiFerm SU             | <ul style="list-style-type: none"><li>• Flow independent</li><li>• Gamma irradiateable</li><li>• Ready to use</li></ul>  | ✓                   |          |            |                                  |            |                          |
| VisiFerm RS485          | <ul style="list-style-type: none"><li>• Flow independent</li></ul>   |                     | ✓        | ✓          |                                  |            |                          |
| VisiFerm mA             | <ul style="list-style-type: none"><li>• Flow independent</li><li>• ATEX / IECEx</li><li>• 2-wire 4-20mA, HART</li></ul>  |                     | ✓        | ✓          |                                  |            |                          |
| VisiTrace RS485         | <ul style="list-style-type: none"><li>• Flow independent</li><li>• Trace level</li><li>• Cl2 resp. ClO2 resistant</li></ul>  |                     |          | ✓          |                                  |            | ✓                        |
| VisiTrace mA            | <ul style="list-style-type: none"><li>• Flow independent</li><li>• Trace level</li><li>• ATEX / IECEx</li><li>• 2-wire 4-20mA, HART</li><li>• Cl2 resp. ClO2 resistant</li></ul> |                     |          | ✓          | ✓                                |            | ✓                        |
| VisiWater               |  |                     |          |            |                                  | ✓          |                          |
| Amperometric DO Sensors | Feature  |                     |          |            |                                  |            |                          |
| OxyFerm FDA             |  |                     | ✓        | ✓          |                                  |            |                          |
| OxyGold G               | <ul style="list-style-type: none"><li>• Trace level</li></ul>  |                     |          |            | ✓                                |            |                          |
| OxyGold B               | <ul style="list-style-type: none"><li>• Trace level</li></ul>  |                     |          |            |                                  |            | ✓                        |

# VisiFerm RS485



The VisiFerm is delivered ready-to-use without the need for polarization. It has improved measurement performance and no CO<sub>2</sub> fouling issues, delivering the lowest drift of available Hamilton DO sensors and requires 80% less calibration\*.

The VisiFerm performs real-time self-diagnostics on sensor and cap health to further ensure optimum performance and reduce process downtime or batch losses. The VisiFerm also has a 50% longer lifetime compared to the older generation of VisiFerm sensors.

\*With ODO Cap H3 or ODO Cap H4

### Benefits

- Ready-to-use
- Real-time self-diagnostic capabilities
- Most stable and robust DO sensor – no CO<sub>2</sub> fouling issues
- Easily replaceable sensor ODO Cap

### Typical applications

- Ethanologenic fermentation
- Biotechnical fermentation
- Brewery fermentation, filtration, filling
- Proactive corrosion control

«Did you know... that Hamilton invented the first optical DO sensor in 12 mm format?»



| Specifications                       |  |
|--------------------------------------|--|
| Measuring range                      | 4 ppb to 25 ppm (DO)<br>0 to 62.85 %-vol or<br>0 to 300 %-sat        |
| Measurement principle                | Oxygen dependent luminescence quenching                              |
| Response time †98%                   | ODO Cap H3 / H0: < 30 s at 25 °C<br>ODO Cap H4 / H2: < 60 s at 25 °C |
| Process temperature                  | -20 to 140 °C, the sensor provides no DO reading above 85 °C         |
| Operating voltage                    | 10 to 27 VDC max. 1.5W   |
| Pressure range (relative to ambient) | -1 to 12 bar g   |
| Sterilization / cleaning method      | Autoclavable, CIP, SIP   |
| Surface quality                      | Ra < 0.4 µm (N5)   |
| Material                             | Stainless steel 1.4435   |
| O-ring                               | EPDM   |

For more specifications see [www.hamiltoncompany.com](http://www.hamiltoncompany.com)

### Accessories




- Cables → 106
- Arc Accessories → 115
- Housings → 123
- Service & Support → 164

ODO Cap H3  
[REF 10068400](#)


ODO Cap H4  
[REF 10078261](#)

T82/D4-Power Adapter  
[REF 242413-XX](#)


Calibration Station  
[REF 243575](#)

| Ordering Information             |   |   |               |         |  |
|----------------------------------|---|---|---------------|---------|--|
| VisiFerm RS 485 Family Structure |   |   |               |         |  |
| 10118255                         | Code  | Interface   |               |         |  |
|                                  | 1   | RS485-ECS   |               |         |  |
|                                  |  | Code  | a-length (mm) |         |  |
|                                  |   | 1   | 120           |         |  |
|                                  |   | 2   | 160           |         |  |
|                                  |   | 3   | 225*          |         |  |
|                                  |   | 4   | 325           |         |  |
|                                  |   | 5   | 425           |         |  |
|                                  |   |  | Code          | ODO Cap |  |
|                                  |   |   | 1             | H0      |  |
|                                  |   |   | 2             | H2      |  |
|                                  |   |   | 3             | H3      |  |
|                                  | 4   |   | H4            |         |  |
|                                  |  | Code  | Wetted Parts  |         |  |
|                                  |   | 1   | EPDM          |         |  |
| 10118255 –                       |   |   |               |         |  |

\*The VisiFerm RS485 225 has, in reality, a shaft length of 215 mm. This ensures optimal rinsing in retractable housings, such as Retractex.



**ODO Cap H3:** For general application in biotechnology, water treatment and monitoring as well as in breweries, wineries and soft drink processing.



**ODO Cap H4:** Designed for fermentation processes where sterilization in place (SIP) is performed in media containing higher amounts of lipophilic compounds. It comes with a hygienic design.



# VisiFerm SU



The VisiFerm Single-Use (SU) offers Hamilton's proven optical measurement technology in a single-use format. It is intended to be used with the dedicated ODO Cap Sx sensor elements for the measurement of dissolved oxygen values in single-use applications.

The reusable VisiFerm SU is not in media contact and therefore no need for sterilization.

The VisiFerm SU together with the ODO Cap Sx sensor element provide a standard analog (ECS) interface and a digital Modbus interface. It can be connected and calibrated with traditional transmitters.

### Benefits

- Hamilton's proven optical DO technology, available in a single-use format minimizes contamination and leakage risks
- Ready-to-use

### Typical applications

- SU bioreactors (bag application)
- SU bioreactors (rigid containers)
- SU mixer (fill and finish application)



| Specifications                  |  |
|---------------------------------|--|
| Measuring range                 | 4 ppb to 25 ppm (DO)<br>0 to 62.85 %-vol<br>0 to 300 %-sat |
| Measurement principle           | Oxygen dependent luminescence quenching                    |
| Response time †98%              | < 30 s at 25 °C  |
| Process temperature             | 4 to 50 °C   |
| Operating voltage               | 10 to 27 VDC max. 1.5 W                                    |
| Sterilization / cleaning method | Gamma irradiation up to 50 kGy (for the disposables)       |

For more specifications see [www.hamiltoncompany.com](http://www.hamiltoncompany.com)

«Did you know...  
that Hamilton invented  
the first optical DO sensor  
in 12 mm format?»

### Accessories

- Cables → 106
- Arc Accessories → 115
- Service & Support → 164

VisiFerm T82/D4-Power Adapter  
REF 242413-XX



| Ordering Information |          |             |            |            |
|----------------------|----------|-------------|------------|------------|
|                      | a-length | RS485-ECS   | ODO Cap S3 | ODO Cap S2 |
| VisiFerm SU          | 120      | 10140046-11 | 10113953   | 10077858   |
|                      | 225      | 10140046-12 | -          |            |
|                      | 325      | 10140046-13 | -          |            |
|                      | 425      | 10140046-14 | -          |            |





# VisiFerm mA



The VisiFerm mA is the optical dissolved oxygen (DO) sensor for use in explosive environment. The VisiFerm is delivered ready-to-use without the need for polarization.

It has improved measurement performance and no CO<sub>2</sub> fouling issues, delivering the lowest drift of available Hamilton DO sensors and requires 80% less calibration. The VisiFerm performs real-time self-diagnostics on sensor and cap health to further ensure optimum performance and reduce process downtime or batch losses. The VisiFerm also has a 50% longer lifetime compared to the older generation of VisiFerm sensors.

Designed especially for production environments, the VisiFerm mA is a 2-wire sensor with 4-20 mA standard or digital HART signal output, and ATEX & IECEx approval.

### Benefits

- Ready-to-use
- Real-time self-diagnostic capabilities
- Most stable and robust DO sensor – no CO<sub>2</sub> fouling issues
- Easily replaceable sensor ODO Cap

### Typical applications

- Explosive atmospheres environment
- Fermentation
- Wort aeration in breweries

«Did you know... that Hamilton invented the first optical DO sensor in 12 mm format?»



| Specifications                       |   |
|--------------------------------------|---|
| Measuring range                      | 4 ppb to 25 ppm (DO)<br>0 to 62.85 %-vol or<br>0 to 300 %-sat |
| Measurement principle                | Oxygen dependent luminescence quenching                       |
| Response time t98%                   | ODO Cap H3: < 30 s at 25 °C<br>ODO Cap H4: < 60 s at 25 °C    |
| Process temperature                  | -20 to 140 °C, the sensor provides no DO reading above 85 °C  |
| Operating voltage                    | 18 to 30 VDC  |
| Pressure range (relative to ambient) | -1 to 12 bar g  |
| Sterilization / cleaning method      | Autoclavable, CIP, SIP  |
| Surface quality                      | Ra < 0.4 µm (N5)  |
| Material                             | Stainless steel 1.4435  |
| O-ring                               | EPDM  |

For more specifications see [www.hamiltoncompany.com](http://www.hamiltoncompany.com)

### Accessories




- Cables → 106
- Arc Accessories → 115
- Housings → 123
- Service & Support → 164

ODO Cap H3  
[REF 10068400](#)


ODO Cap H4  
[REF 10078261](#)

Junction Box  
[REF 10076282](#)


Calibration Station  
[REF 243575](#)

| Ordering Information         |   |   |           |               |              |  |  |
|------------------------------|---|---|-----------|---------------|--------------|--|--|
| VisiFerm mA Family Structure |   |   |           |               |              |  |  |
| 10070760                     | Code  |   | Interface |               |              |  |  |
|                              | 1   | mA/HART   |           |               |              |  |  |
|                              |  | Code  |           | a-length (mm) |              |  |  |
|                              |   | 1   | 120       |               |              |  |  |
|                              |   | 2   | 160       |               |              |  |  |
|                              |   | 3   | 225*      |               |              |  |  |
|                              |   | 4   | 325       |               |              |  |  |
|                              |   | 5   | 425       |               |              |  |  |
|                              |   |  | Code      |               | ODO Cap      |  |  |
|                              |   |   | 1         | H3            |              |  |  |
|                              |   |   | 2         | H4            |              |  |  |
|                              |  |   | Code      |               | Wetted Parts |  |  |
|                              |   | 1   | EPDM      |               |              |  |  |
| 10070760 –                   |   |   |           |               |              |  |  |

\*The VisiFerm mA 225 has, in reality, a shaft length of 215 mm. This ensures optimal rinsing in retractable housings, such as Retractable.



**ODO Cap H3:** For general application in biotechnology, water treatment and monitoring as well as in breweries, wineries and soft drink processing.



**ODO Cap H4:** Designed for fermentation processes where sterilization in place (SIP) is performed in media containing higher amounts of lipophilic compounds. It comes with a hygienic design.



# VisiTrace RS485



The VisiTrace offers all the advantages of Hamilton’s optical dissolved oxygen sensors (fast response time and low maintenance) with the additional advantage of being specifically designed to measure ppb levels of dissolved oxygen. VisiTrace sensors are suitable for Brewery and Power Plant applications.

The special designed ODO Cap L1 is stabilized against standard disinfectant solution with active chlorine and chlorine dioxide. This is powerful during measurements in breweries, which may not allow for calibration after every CIP.

### Benefits

- Optical dissolved oxygen sensor: fast response time and low maintenance
- Designed to measure trace (ppb) levels of dissolved oxygen
- Flow and CO<sub>2</sub> independent readings

### Typical applications

- Breweries (Filtration and Filling)
- Power Plants

«Did you know... that the VisiTrace is the only optical DO sensor that withstands chlorine and chlorine dioxide for a long time?»



| Specifications                       |  |
|--------------------------------------|--|
| Measuring range                      | 0 to 2000 ppb (DO)   |
| Measurement principle                | Oxygen dependent luminescence quenching                      |
| Response time †90%                   | < 20 s in gas; < 90 s in water                               |
| Process temperature                  | -20 to 140 °C, the sensor provides no DO reading above 85 °C |
| Operating voltage                    | 10 to 27 VDC max. 1.5W                                       |
| Pressure range (relative to ambient) | -1 to 12 bar g   |
| Sterilization / cleaning method      | Autoclavable, CIP, SIP                                       |
| Surface quality                      | Ra < 0.4 µm (N5)   |
| Material                             | Stainless steel 1.4435                                       |
| O-ring                               | EPDM   |

For more specifications see [www.hamiltoncompany.com](http://www.hamiltoncompany.com)

### Accessories


- Cables → 106
- Arc Accessories → 115
- Housings → 123
- Service & Support → 164

ODO Cap L1  
[REF 10107102](#)

Calibration Station  
[REF 243575](#)

| Ordering Information             |   |   |           |               |              |  |
|----------------------------------|---|---|-----------|---------------|--------------|--|
| VisiTrace RS485 Family Structure |   |   |           |               |              |  |
| 10140043                         | Code  |   | Interface |               |              |  |
|                                  | 1   | RS485   |           |               |              |  |
|                                  |  | Code  |           | a-length (mm) |              |  |
|                                  |   | 1   | 120       |               |              |  |
|                                  |   | 2   | 160       |               |              |  |
|                                  |   | 3   | 225*      |               |              |  |
|                                  |   | 4   | 325       |               |              |  |
|                                  |   | 5   | 425       |               |              |  |
|                                  |   |  | Code      |               | ODO Cap      |  |
|                                  |   |   | 1         | L1            |              |  |
|                                  |  |   | Code      |               | Wetted Parts |  |
|                                  |   | 1   | EPDM      |               |              |  |
| 10140043 –                       |   |   |           |               |              |  |

\*The VisiTrace RS485 225 has, in reality, a shaft length of 215 mm. This ensures optimal rinsing in retractable housings, such as Retractable.



**ODO Cap L1:** Designed for trace level measurements of dissolved oxygen in breweries, water de-aeration and power plants.

# VisiTrace mA



The VisiTrace offers all the advantages of Hamilton's optical dissolved oxygen sensors (fast response time and low maintenance) with the additional advantage of being specifically designed to measure ppb levels of dissolved oxygen. VisiTrace sensors are suitable for Brewery and Power Plant applications.

The integrated Bluetooth 5 wireless interface may be used for monitoring, configuration and calibration, and saves time without compromising quality.

### Benefits

- Optical dissolved oxygen sensor: fast response time and low maintenance
- Designed to measure trace (ppb) levels of dissolved oxygen
- VisiTrace mA is ATEX and IECEx approved
- Flow and CO<sub>2</sub> independent readings

### Typical applications

- Breweries (Filtration and Filling)
- Power Plants



| Specifications                       |  |
|--------------------------------------|--|
| Measuring range                      | 0 to 2000 ppb (DO)   |
| Measurement principle                | Oxygen dependent luminescence quenching                      |
| Response time t90%                   | < 20 s in gas; < 90 s in water                               |
| Process temperature                  | -20 to 140 °C, the sensor provides no DO reading above 85 °C |
| Operating voltage                    | 18 to 30 VDC   |
| Pressure range (relative to ambient) | -1 to 12 bar g   |
| Sterilization / cleaning method      | Autoclavable, CIP, SIP                                       |
| Surface quality                      | R <sub>a</sub> < 0.4 µm (N5)                                 |
| Material                             | Stainless steel 1.4435                                       |
| O-ring                               | EPDM   |

For more specifications see [www.hamiltoncompany.com](http://www.hamiltoncompany.com)

### Accessories



- Cables → 106
- Arc Accessories → 115
- Housings → 123
- Service & Support → 164

ODO Cap L1  
[REF 10107102](#)


Calibration Station  
[REF 243575](#)

Junction Box  
[REF 10076282](#)

«Did you know... that the VisiTrace is the only optical DO sensor that withstands chlorine and chlorine dioxide for a long time?»

| Ordering Information          |   |   |           |               |              |  |  |
|-------------------------------|---|---|-----------|---------------|--------------|--|--|
| VisiTrace mA Family Structure |   |   |           |               |              |  |  |
| 10068709                      | Code  |   | Interface |               |              |  |  |
|                               | 1   | mA/HART   |           |               |              |  |  |
|                               |  | Code  |           | a-length (mm) |              |  |  |
|                               |   | 1   | 120       |               |              |  |  |
|                               |   | 2   | 160       |               |              |  |  |
|                               |   | 3   | 225*      |               |              |  |  |
|                               |   | 4   | 325       |               |              |  |  |
|                               |   | 5   | 425       |               |              |  |  |
|                               |   |  | Code      |               | ODO Cap      |  |  |
|                               |   |   | 1         | L1            |              |  |  |
|                               |  |   | Code      |               | Wetted Parts |  |  |
|                               |   | 1   | EPDM      |               |              |  |  |
| 10068709 –                    |   |   |           |               |              |  |  |

\*The VisiTrace mA 225 has, in reality, a shaft length of 215 mm. This ensures optimal rinsing in retractable housings, such as Retractable.



**ODO Cap L1:** Designed for trace level measurements of dissolved oxygen in breweries, water de-aeration and power plants.

# VisiWater DO P



VisiWater sensors are optical technology sensors intended for the measurement of dissolved oxygen submersible applications in the environmental water industry due to the long fixed cable (10m) and IP68 rating.

The VisiWater requires less maintenance due to its integrated self-diagnostic opto-electronics, and absence of a mechanically sensitive membrane or corrosive electrolyte.

Optical DO technology ensures no CO<sub>2</sub> fouling, fast response time and stable measurement.

The output signals 4-20 mA or Modbus can easily be integrated into process control systems (PCS). Calibration and configuration can be done via the PCS or ArcAir Desktop version with the help of the USB RS485 Modbus Converter.

## Benefits

- Intended for water applications
- Self diagnostic capabilities
- Less maintenance: no mechanically sensitive membrane or corrosive electrolyte
- Optical dissolved oxygen sensor: fast response time and stable measurement
- Easily replaceable sensor ODO cap (UV stabilized Polyamid)

## Typical applications

- Environmental (outdoor) applications
- Water and Wastewater
- Fish farming



| Specifications        |   |
|-----------------------|---|
| Measuring range       | 4 ppb to 40 ppm (DO)                    |
| Measurement principle | Oxygen dependent luminescence quenching |
| Response time †90%    | < 30 s at 25 °C                         |
| Process temperature   | 0 to 60 °C                              |
| Pressure range        | -1 to 12 bar                            |
| Material              | Shaft: PVC-U<br>Cap: PA                 |

For more specifications see [www.hamiltoncompany.com](http://www.hamiltoncompany.com)

## Accessories

- ODO Cap H2O  
[REF 243536](#)
- Junction Box  
[REF 10076282](#)
- USB RS485 Modbus Converter  
[REF 242411](#)



| Ordering Information        |          |                |
|-----------------------------|----------|----------------|
|                             | α-length | 10 m fix cable |
| VisiWater DO P Arc 120 FC10 | 150      | 10066566       |

\*Only for OEM integration available



**ODO Cap H2O:** The standard ODO Cap H2O is the default option for water applications.



# OxyFerm FDA



The OxyFerm FDA is an electrochemical oxygen sensor suited for applications with high demands for hygiene, e.g. in pharmaceutical industry, in biotechnology and in food & beverage production. It is available with 12 mm or 25 mm (XL) shaft diameter. The sensor is equipped with an FDA-approved membrane for use in hygienic processes. It withstands steam sterilization, autoclavation and CIP cleanings.



| Specifications                       |  |
|--------------------------------------|--|
| Measuring range                      | 10 ppb to 40 ppm (DO)                                      |
| Measurement principle                | Electrochemical reduction of oxygen                        |
| Response time t98%                   | < 60 s at 25 °C  |
| Process temperature                  | 0 to 130 °C (Arc: analog 0 to 110 °C, digital 0 to 130 °C) |
| Pressure range (relative to ambient) | 0 to 4 bar g   |
| Sterilization / cleaning method      | Autoclavable, CIP, SIP                                     |
| Electrolyte                          | Oxlyte   |
| Surface quality                      | R <sub>a</sub> < 0.4 µm (N5)                               |
| Current in air at 25°C               | 40 to 80 nA  |
| Material                             | Stainless steel 1.4435                                     |
| Polarization voltage                 | -670 mV  |
| O-ring                               | EPDM   |

For more specifications see [www.hamiltoncompany.com](http://www.hamiltoncompany.com)

## Accessories

- Cables → 106
- Arc Accessories → 115
- Housings → 123
- Service & Support → 164

- Membrane Kit FDA [REF 237140](#)
- Membrane Kit CIP [REF 237126](#)
- Membrane Kit [REF 237123](#)
- Oxlyte 30 mL [REF 237118](#)
- Replacement Cathode OxyFerm [REF 237306](#)
- Autoclavation Cap Oxyferm [REF 242000](#)
- Polarization Module G [REF 237350](#)
- Polarization Module T [REF 237370](#)

## Benefits

- Sanitary Feature: The silicone membrane seals without a gap to steel membrane body (no additional o-ring)
- Little drift, fast response, short polarization time
- Replacing the cathode is possible and very simple to perform

## Typical applications

- Explosive atmospheres environment
- Fermentation

| Ordering Information |          |           |        |           |          |
|----------------------|----------|-----------|--------|-----------|----------|
|                      | α-length | T82       | VP6    | Arc       | MS       |
| OxyFerm FDA          | 120      | 237450    | 237540 | 243100    | 237713   |
|                      | 160      | 237455    | 237541 | 243101    | 10069701 |
|                      | 225      | 237452    | 237542 | 243102    | 237715   |
|                      | 325      | 237453    | 237543 | 243103    | 10069700 |
|                      | 425      | 237454    | 237544 | 243104    | -        |
| OxyFerm XL           | 56       | 237175-OP | -      | 243140-OP | -        |
| OxyFerm CIP          | 120      | 243289    | -      | -         | -        |



With the XL option, the o-ring position (OP) can be optimally matched to the weld-in socket from 22 to 55mm. Please state the OP in mm you need when ordering.

# OxyGold B



The OxyGold B is an electrochemical oxygen sensor especially designed for applications which contain carbon dioxide like the production of beer, sparkling wine or soft drinks. The sensor is not affected by acidic gases.

Apart from the production of sparkling beverages, the OxyGold B can be used in all production processes where CO<sub>2</sub> might be an issue for electrochemical sensors.

### Benefits

- No cross-sensitivity with CO<sub>2</sub>
- Only very little flow required
- Pressure and CIP resistant
- Replacing the cathode is possible and very simple to perform

### Typical applications

- CO<sub>2</sub> recovery
- Water de-aeration



| Specifications                       |                                     |
|--------------------------------------|-------------------------------------|
| Measuring range                      | 8 ppb to 40 ppm (DO)                |
| Measurement principle                | Electrochemical reduction of oxygen |
| Response time t90%                   | < 60 s at 25 °C                     |
| Process temperature                  | 0 to 100 °C                         |
| Pressure range (relative to ambient) | 0 to 12 bar g                       |
| Sterilization / cleaning method      | CIP                                 |
| Electrolyte                          | Oxylite B                           |
| Surface quality                      | R <sub>a</sub> < 0.4 µm (N5)        |
| Current in air at 25°C               | 180 to 500 nA                       |
| Material                             | Stainless steel 1.4435              |
| Polarization voltage                 | 0 mV                                |
| O-ring                               | EPDM                                |

For more specifications see [www.hamiltoncompany.com](http://www.hamiltoncompany.com)

### Accessories

- Cables → 106
- Housings → 123
- Service & Support → 164

- OxyGold Membrane Kit  
[REF 237135](#)
- Oxylite B 30 mL  
[REF 237138](#)
- Polarization Module B  
[REF 237360](#)
- Replacement Cathode OxyGold B  
[REF 237437](#)

«Did you know... that the OxyGold B is the only sensor in the market with a polarization voltage of 0 mV?»



| Ordering Information |          |        |               |
|----------------------|----------|--------|---------------|
|                      | α-length | VP6    | Arc           |
| OxyGold B            | 120      | 237180 | not available |
|                      | 225      | 237185 | anymore*      |

\*See VisiTrace sensor, page 90



# OxyGold G



The OxyGold G is an electrochemical oxygen sensor designed for processes in which very small amounts of oxygen have to be traced, like in the pharmaceutical or microelectronics industry. It is also suitable for processes where high pressures are applied.

### Benefits

- Trace level measurement
- Suitable for use at high temperatures and high pressures during sterilization and CIP
- Little flow sensitivity
- Replacing the cathode is possible and very simple to perform

### Typical applications

- Boiler Feed Water
- Microelectronics



| Specifications                       |  |
|--------------------------------------|--|
| Measuring range                      | 1 ppb to 40 ppm (DO)                                       |
| Measurement principle                | Electrochemical reduction of oxygen                        |
| Response time t90%                   | < 60 s at 25 °C  |
| Process temperature                  | 0 to 130 °C (Arc: analog 0 to 110 °C, digital 0 to 130 °C) |
| Pressure range (relative to ambient) | 0 to 12 bar g  |
| Sterilization / cleaning method      | Autoclavable, CIP, SIP                                     |
| Electrolyte                          | Oxlyte G   |
| Surface quality                      | R <sub>a</sub> < 0.4 µm (N5)                               |
| Current in air at 25°C               | 180 to 500 nA  |
| Material                             | Stainless steel 1.4435                                     |
| Polarization voltage                 | -670 mV  |
| O-ring                               | EPDM   |

For more specifications see [www.hamiltoncompany.com](http://www.hamiltoncompany.com)

### Accessories

- Cables → 106
- Arc Accessories → 115
- Housings → 123
- Service & Support → 164

OxyGold Membrane Kit  
[REF 237135](#)

Oxlyte G 30 mL  
[REF 237139](#)

Polarization Module G  
[REF 237350](#)

Replacement Cathode OxyGold G  
[REF 237427](#)

| Ordering Information |          |        |        |
|----------------------|----------|--------|--------|
|                      | α-length | VP6    | Arc    |
| OxyGold G            | 120      | 237395 | 243110 |
|                      | 225      | 237396 | 243111 |





# Oxysens

DO

The Oxysens is an electrochemical oxygen sensor designed for applications in water, e.g. wastewater treatment, swimming pools or fish farms. It is easy to maintain, because the membrane and the electrolyte do not need to be replaced.

The response time of the Oxysens is fast, it is almost independent to flow and insensitive to soiling.

### Benefits

- Maintenance-free DO sensor, no change of membrane or electrolyte
- Robust design
- Insensitive to soiling
- Short polarization and response times

### Typical applications

- Water and Wastewater
- Fish farming



| Specifications                       |                                     |
|--------------------------------------|-------------------------------------|
| Measuring range                      | 40 ppb to 40 ppm (DO)               |
| Measurement principle                | Electrochemical reduction of oxygen |
| Response time t90%                   | < 60 s at 25 °C                     |
| Process temperature                  | 0 to 60 °C                          |
| Pressure range (relative to ambient) | 0 to 4 bar g                        |
| Electrolyte                          | Oxylite                             |
| Surface quality                      | R <sub>a</sub> < 0.8 µm (N6)        |
| Current in air at 25°C               | 40 to 80 nA                         |
| Material                             | Stainless steel 1.4435              |
| Polarization voltage                 | -670 mV                             |
| O-ring                               | EPDM                                |

For more specifications see [www.hamiltoncompany.com](http://www.hamiltoncompany.com)

### Accessories

- Housings → [123](#)
- Service & Support → [164](#)

Immersing Set  
The Immersing Set sheaths and protects 120 mm sensors such as Oxysens while immersed in streams or channels  
[REF 237158](#)



| Ordering Information |          |                 |
|----------------------|----------|-----------------|
|                      | a-length | 5 m fixed cable |
| Oxysens              | 120      | 237150          |



# Oxygen Accessories



**OxyFerm Membrane Kit**

The OxyFerm Membrane Kit contains 3 membrane bodies, Oxylyte electrolyte, pipette, spare o-ring and a polishing strip.

| Description          | REF    |
|----------------------|--------|
| OxyFerm Membrane Kit | 237123 |

**Membrane Kit FDA**

The Membrane Kit FDA is the kit for the OxyFerm FDA sensors and contains 3 FDA membrane bodies, Oxylyte electrolyte, pipette, spare o-ring and a polishing strip. The membrane body of the FDA membrane has a special rounded design to prevent accumulation of gas bubbles.

| Description      | REF    |
|------------------|--------|
| Membrane Kit FDA | 237140 |

**Membrane Kit CIP**

The Membrane Kit CIP contains 3 membrane bodies that are especially designed to withstand CIP cleanings. Oxylyte electrolyte, pipette, spare o-ring and a polishing strip.

| Description      | REF    |
|------------------|--------|
| Membrane Kit CIP | 237126 |



**OxyGold Membrane Kit**

The OxyGold Membrane Kit contains 3 membrane bodies with the rounded design, pipette and spare o-ring. Electrolyte must be ordered separately to match the sensor. See page [→ 105](#)

| Description          | REF    |
|----------------------|--------|
| OxyGold Membrane Kit | 237135 |

**Polarization Module**

The Polarization Module is to prepare replacement sensors so that they can be used immediately for measurements without connection to a transmitter. It polarizes the oxygen sensors and saves polarization time at the transmitter.

| Description   | REF    |
|---|--------|
| Polarization Module T<br>OxyFerm / OxyFerm FDA / OxyFerm XL | 237370 |
| Polarization Module G<br>OxyFerm VP / OxyGold G             | 237350 |
| Polarization Module B<br>OxyGold B                          | 237360 |
| Replacement Cathode OxyFerm                                 | 237306 |
| Replacement Cathode OxyGold G                               | 237427 |
| Replacement Cathode OxyGold B                               | 237437 |

**Autoclavation Cap**

The Autoclavation Cap is used to protect the OxyFerm T82 connector from moisture during autoclavation. It is important to keep connections dry and clean to ensure reliable measurements.

| Description               | REF    |
|---------------------------|--------|
| Autoclavation Cap OxyFerm | 242000 |

# Electrolytes & Solutions



**Electrolyte**

| Description                     | REF    |        |
|---------------------------------|--------|--------|
| Electrolytes for pH Sensors     |        |        |
| 3 M KCl                         | 100 mL | 238036 |
| 3 M KCl                         | 500 mL | 238936 |
| Skylyte-CL                      | 100 mL | 242080 |
| Protelyte                       | 100 mL | 238038 |
| 3 M KCl-LR                      | 500 mL | 238939 |
| Skylyte                         | 500 mL | 238937 |
| Electrolytes for Oxygen Sensors |        |        |
| OxyGold Oxylyte G               | 30 mL  | 237139 |
| OxyGold Oxylyte B               | 30 mL  | 237138 |
| OxyFerm Oxylyte                 | 30 mL  | 237118 |

**Storage Solution**

In order to to achieve long sensor life and faster electrode response times, it is recommended to store electrodes in our storage solution. It is an acid-buffered solution that ensures the regeneration of the electrode in addition to provide an optimized storage.

| Description      | REF    |        |
|------------------|--------|--------|
| Storage Solution | 500 mL | 238931 |

**Cleaning Solution Set**

Depending on the type of application, the pH glass or diaphragm can get contaminated through various ingredients of the measuring solution. This is indicated by a slow response of the electrode, or even incorrect readings. To overcome these problems, Hamilton has developed a cleaning solution set. The intention is to have an overall cleaning of the pH glass as well as the diaphragm. The set is comprised of Cleaning Solution A, Cleaning solution B and a storage solution. To clean the electrode put it into each solution for 15 – 30 minutes, and your electrode will be ready for new measurements again.

| Description           | REF    |  |
|-----------------------|--------|--|
| Cleaning Solution Set | 238290 |  |



# Connectivity overview

## Where and why, we need all these accessories

A quality measurement is nothing without a quality connection to your system. Whether a traditional analog connection or digitally via Modbus RS 485, we offer a broad range of connectivity options for you to choose from. The below diagram should help you navigate through the necessary requirements with ease.



| Process Control Signal | Transmitter / Controller |                     | 4-20 mA                     |                             | Bus Communication                              |                           |   | Ethernet Communication   |                        |
|------------------------|--------------------------|---------------------|-----------------------------|-----------------------------|--|---------------------------|---|--------------------------|------------------------|
|                        |                          |                     | 2-wire<br>HART + ATEX       | 4-wire<br>Galvanic Isolated | Modbus RTU<br>Integrated in all<br>Arc Sensors | Profibus DP<br>REF 243555 | Foundation<br>Fieldbus<br>REF 111009053 | Profinet<br>REF 10116586 | OPC UA<br>REF 10089359 |
| Diagram                |                          |                     |                             |                             |  |                           |   |                          |                        |
| Product                | Traditional<br>nA/mV     | Memosens<br>Sensors | VisiFerm mA<br>VisiTrace mA | Arc Wi 2G                   | Arc Wi 2G / 1G / No Wi                         | Arc Wi 1G + Converter     |   |                          | Arc Wi 1G + OPC        |
|                        |                          |                     |                             | Arc RS485 Sensors           |  |                           |   |                          |                        |
| Parameter              | pH ORP DO Cond           | pH DO               | DO                          | CO2 VCD TCD DO pH ORP Cond  |  |                           |   |                          |                        |



# Cables

A high quality measurement requires a high quality connection to the process control system. Hamilton cables ensure the best possible connection between your sensor and your process control system.

## Sensor Connection

### Sensor connector and relevant cables

So what connector does my sensor have and what cable do I use? Below are a list of connectors available with Hamilton sensors.

#### VP

The VP (VarioPin) is a common connector used throughout the Hamilton sensor product line. VP is abbreviation for "VarioPin". The VP designation often includes a number referring to the number of exposed.

#### K8

K8 connectors are typically used on traditional pH / ORP sensors which lack temperature compensation. These connectors have a two pole design comprised of the center core and outer metallic threaded connection.

#### S7/S8

S7 and S8 connectors are typically found on traditional pH sensors with no temperature compensation. They are the same basic design however S8 connectors have PG13.5 mounting threads, while S7 connectors do not. These connectors are recessed thus care must be taken to avoid moisture getting trapped which could lead to a short circuit.

#### T82

The T82 connector is sometimes known as a D4 connector. It uses a twist lock design to secure the cable to the sensor. These connectors are less common and only found on the Hamilton OxyFerm FDA Dissolved Oxygen Sensors.

#### M12

The M12 connector is a common industrial connector found on our VisiForm mA and Visitrace mA sensors as well as various accessories. Be careful with cable selection as there can be many different variations of this connector in both number of pins and connection type.

#### Memosens

Memosens® signals are digitalized and transferred inductively via a non-contact connection. Memosens features complete galvanic isolation and is fully waterproof and resistant to environmental influences.

## Cable Connection

Improved  
Electrical  
Properties

Robust  
Design

Hamilton  
Logo


Indicator  
Arrows

Easier  
Connection

## Introducing the Hamilton made VP connector

### Now on all of our VP cables

Traditionally, VP connectors were every difficult to connect and disconnect. Our new connector was developed with special focus on the ease of connection.

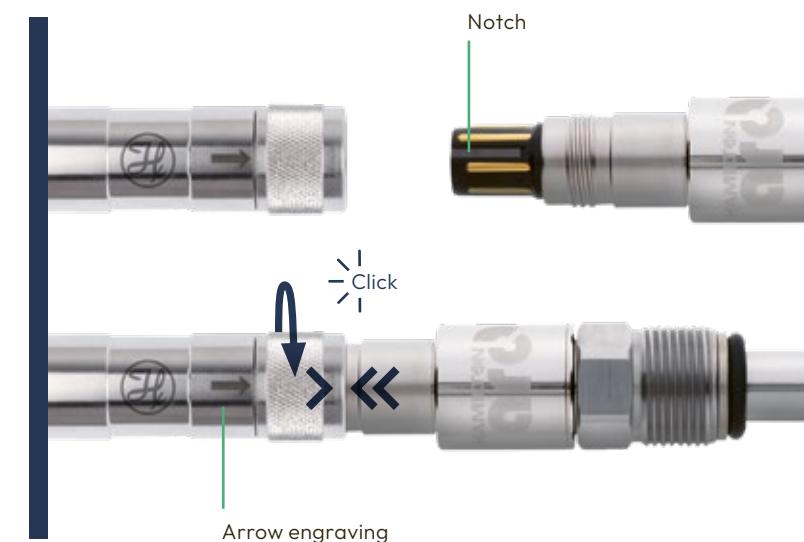

Closing:

- Easy self alignment
- Closed position feedback

Opening:

- Tool less
- Low force

# Cables for Traditional Sensors



S7

For sensors with standard (S7) connector. Controller side no connector (open end). Best suited for use with transmitters or devices with open wiring terminals.



| Length | Diameter | REF    |
|--------|----------|--------|
| 1 m    | 5 mm     | 355072 |
| 5 m    | 5 mm     | 355066 |
| 10 m   | 5 mm     | 355080 |

For sensors with standard (S7) connector. Controller side BNC connector. BNC connectors are commonly found on Applikon biocontrollers and some older transmitters.



| Length | Diameter | REF    |
|--------|----------|--------|
| 1 m    | 3 mm     | 355043 |
| 3 m    | 3 mm     | 355057 |
| 5 m    | 3 mm     | 355056 |

For sensors with standard (S7) connector. Device side DIN connector. The DIN connector may be found on older Satorius biocontrollers and some laboratory pH meters.



| Length | Diameter | REF    |
|--------|----------|--------|
| 1 m    | 3 mm     | 355045 |
| 3 m    | 3 mm     | 355059 |



K8

For sensors with standard (S7) connector. Controller side no connector (open end). Best suited for use with transmitters or devices with open wiring terminals.



| Length | Diameter | REF    |
|--------|----------|--------|
| 1 m    | 5 mm     | 355153 |
| 3 m    | 5 mm     | 355154 |
| 5 m    | 5 mm     | 355155 |
| 10 m   | 5 mm     | 355156 |

For sensors with K8 connector. Controller side DIN connector. The DIN connector may be found on older Satorius biocontrollers and some laboratory pH meters.



| Length | Diameter | REF    |
|--------|----------|--------|
| 1 m    | 5 mm     | 355157 |
| 2 m    | 5 mm     | 355158 |
| 3 m    | 5 mm     | 355159 |




T82/D4

For sensors with T82/D4 connector, e.g. OxyFerm. Controller side no connector (open end).



| Length | Diameter | REF    |
|--------|----------|--------|
| 1 m    | 5 mm     | 355087 |
| 3 m    | 5 mm     | 355088 |
| 5 m    | 5 mm     | 355089 |
| 10 m   | 5 mm     | 355311 |

For sensors with T82/D4 connector, e.g. OxyFerm.  
Controller side Lemo connector.

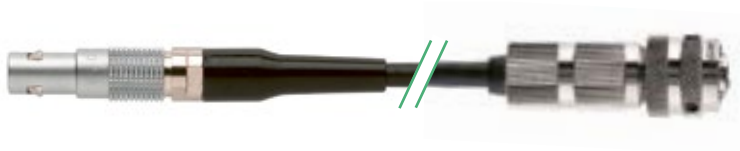

| Length | Diameter | REF    |
|--------|----------|--------|
| 1 m    | 5 mm     | 355160 |
| 2 m    | 5 mm     | 355161 |
| 3 m    | 5 mm     | 355162 |
| 5 m    | 5 mm     | 355163 |



# Memosens

For sensors with Memosens connector.  
Controller side no connector (open end).



| Length | Diameter | REF    |
|--------|----------|--------|
| 3 m    | 6.3 mm   | 355350 |
| 5 m    | 6.3 mm   | 355351 |
| 10 m   | 6.3 mm   | 355352 |



# VP6

For sensors with Memosens connector.  
Controller side no connector (open end).




| Length | Diameter | REF    |
|--------|----------|--------|
| 1 m    | 7,5 mm   | 355108 |
| 2 m    | 7,5 mm   | 355187 |
| 3 m    | 7,5 mm   | 355109 |
| 5 m    | 7,5 mm   | 355110 |
| 10 m   | 7,5 mm   | 355111 |
| 20 m   | 7,5 mm   | 355112 |

# Cables for Intelligent Sensors

Connection for Industrial Processes e.g. Production [see page → 13](#)




# VP8

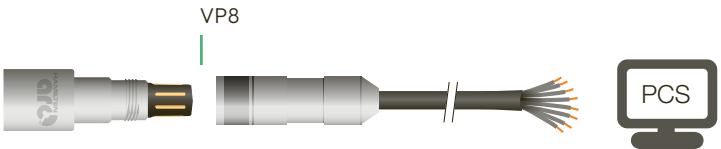

- Compatible with:
- VisiFerm RS485-ECS family
  - pH Arc family
  - Conducell 4UxF family
  - ORP Arc Sensors
  - Conducell UPW Arc Sensors
  - eDO Arc Sensor (e.g. OxyFerm FDA Arc)


\* VisiFerm DO family only

| Description                    | Interface      | REF      |
|--------------------------------|----------------|----------|
| 1 m Data Cable VP8 / Open End  | 4-20 mA/Modbus | 355263   |
| 3 m Data Cable VP8 / Open End  | 4-20 mA/Modbus | 355264   |
| 5 m Data Cable VP8 / Open End  | 4-20 mA/Modbus | 355265   |
| 10 m Data Cable VP8 / Open End | 4-20 mA/Modbus | 355266   |
| 15 m Data Cable VP8 / Open End | 4-20 mA/Modbus | 355267   |
| 20 m Data Cable VP8 / Open End | 4-20 mA/Modbus | 355268   |
| 1 m Cable VP8 / Open End       | ECS mode*      | 355217   |
| 3 m Cable VP8 / Open End       | ECS mode*      | 355218   |
| 5 m Cable VP8 / Open End       | ECS mode*      | 355219   |
| 10 m Cable VP8 / Open End      | ECS mode*      | 355220   |
| 15 m Cable VP8 / Open End      | ECS mode*      | 355221   |
| 20 m Cable VP8 / Open End      | ECS mode*      | 355222   |
| 1m Data Cable (4 wire)         | Modbus         | 10109026 |
| 2m Data Cable (4 wire)         | Modbus         | 10109251 |
| 3m Data Cable (4 wire)         | Modbus         | 10109250 |

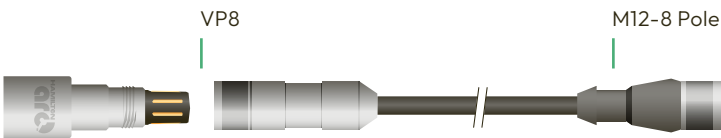

Compatible with all Arc Sensors

| Description                              | REF      |
|--|----------|
| 1 m Data Cable VP8 / M12-8 Pole (male)   | 10070910 |
| 1.5 m Data Cable VP8 / M12-8 Pole (male) | 10160638 |
| 3 m Data Cable VP8 / M12-8 Pole (male)   | 10071905 |
| 5 m Data Cable VP8 / M12-8 Pole (male)   | 10067844 |
| 10 m Data Cable VP8 / M12-8 Pole (male)  | 10067846 |

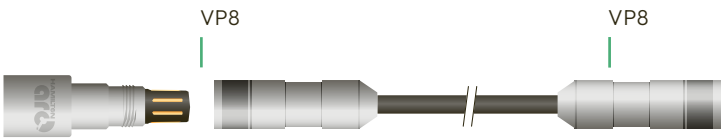


Compatible with all Arc Sensors

| Description                | REF      |
|----------------------------|----------|
| 1m Cable VP8 (F) / VP8 (F) | 10108609 |
| 2m Cable VP8 (F) / VP8 (F) | 10108610 |
| 3m Cable VP8 (F) / VP8 (F) | 10108611 |




# M12 8-Pole

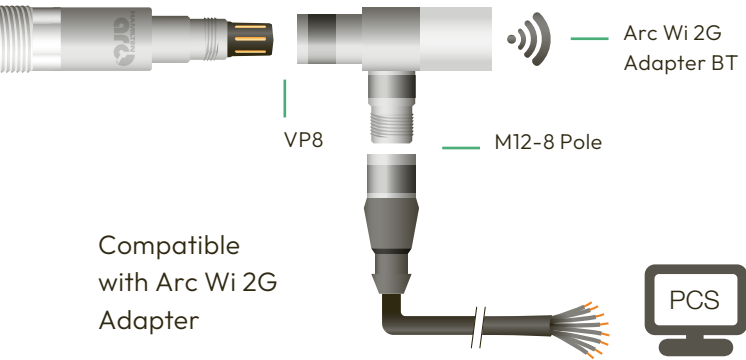


| Description                      | REF    |
|----------------------------------|--------|
| 3 m Cable M12-8 Pole / Open End  | 355320 |
| 5 m Cable M12-8 Pole / Open End  | 355321 |
| 10 m Cable M12-8 Pole / Open End | 355322 |

# M12 4-Pole

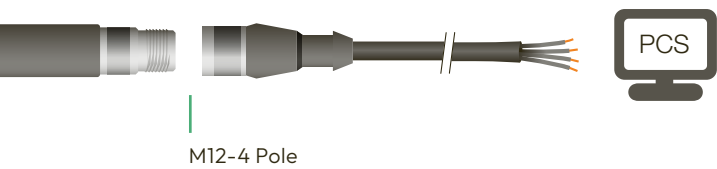

- Compatible with:
- VisiFerm mA family
  - VisiTrace mA familiy

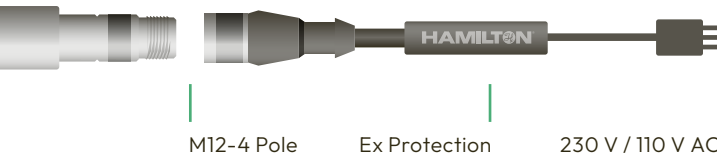

- Compatible with:
- VisiFerm mA family
  - VisiTrace mA familiy


| Description                      | REF    |
|----------------------------------|--------|
| 3 m Cable M12-4 Pole / Open End  | 355283 |
| 5 m Cable M12-4 Pole / Open End  | 355284 |
| 10 m Cable M12-4 Pole / Open End | 355285 |

| Description                | REF    |
|----------------------------|--------|
| 3 m Power Cable M12-4 Pole | 355288 |


# Power Cables for Bio Controllers

Connection for old Bio Controllers or Transmitters in R&D [see page → 15](#)

If you want to gain the benefits our Arc Intelligent sensors can give you but need to stick with an analog sensor connection with your transmitter or PCS, the following cables can assit in giving you this backwards capability.

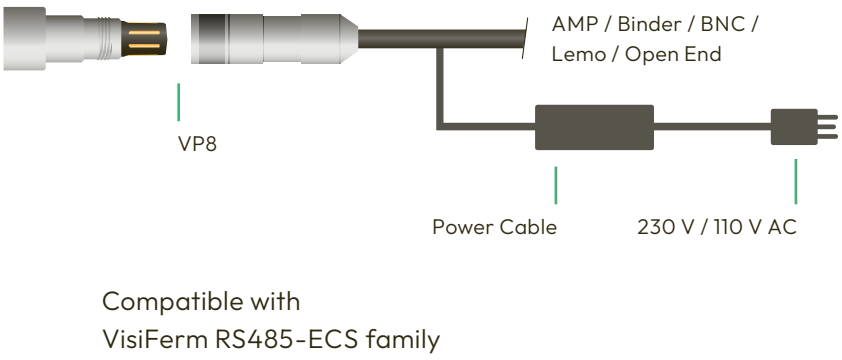

| Description                    | REF    |
|--------------------------------|--------|
| 1 m Power Cable VP8 / AMP      | 355298 |
| 4 m Power Cable VP8 / Binder   | 355258 |
| 1 m Power Cable VP8 / BNC      | 355297 |
| 3 m Power Cable VP8 / BNC      | 355296 |
| 2.5 m Power Cable VP8 / Lemo   | 355245 |
| 1 m Power Cable VP8 / Open End | 355194 |

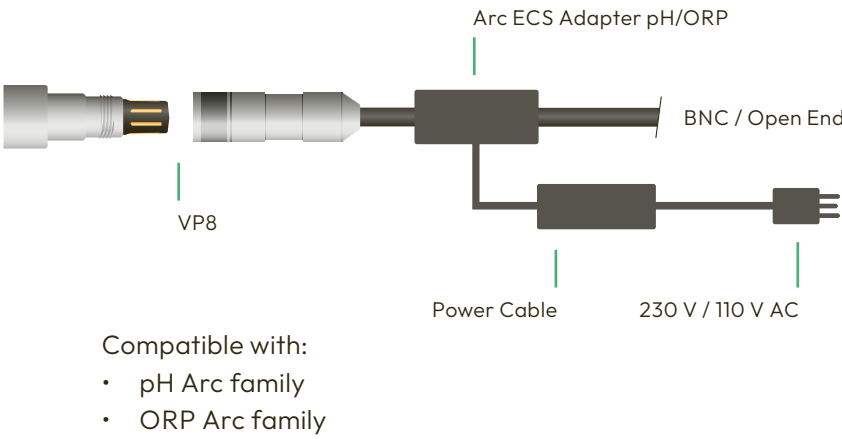


| Description                     | REF       |
|---------------------------------|-----------|
| Arc ECS Adapter pH/ORP BNC      | 243168-XX |
| Arc ECS Adapter pH/ORP Open End | 243169-XX |

The code XX in the product number defines the type of electrical power connector:

01 – Power cord EU / 02 – Power cord CH /  
03 – Power cord US / 04 – Power cord UK /  
05 – Power cord AU/NZ

For retrofit of existing polarographic DO sensor installations with VisiFerm RS485-ECS sensors.

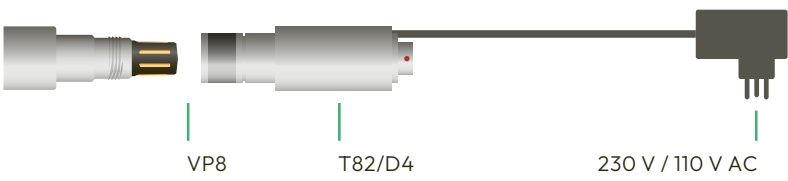


| Description                   | REF       |
|-------------------------------|-----------|
| VisiFerm T82/D4-Power Adapter | 242413-XX |

The code XX in the product number defines the type of electrical power connector:

01 – Power cord EU / 02 – Power cord CH /  
03 – Power cord US / 04 – Power cord UK /  
05 – Power cord AU/NZ


The new Power Cable M12-8 Pole / open end is designed for use with the Arc Wi 2G Adapter BT (REF 243470) to facilitate an “active” 4-20 mA signal.

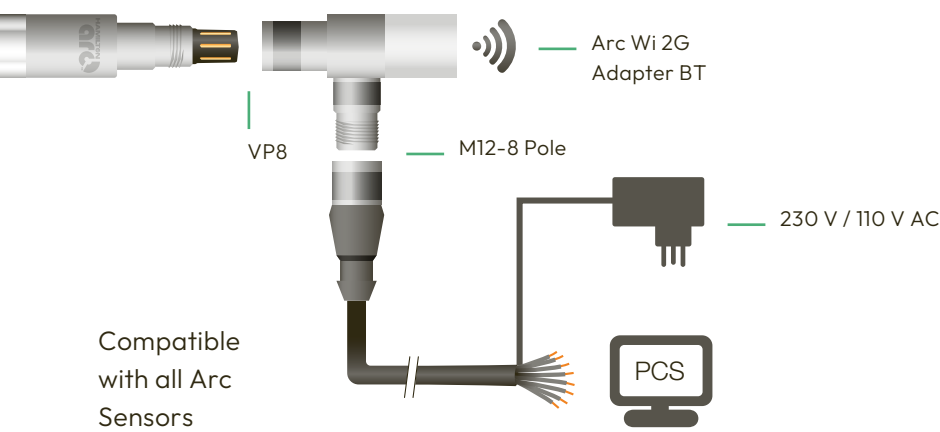

| Description                                       | REF      |
|---|----------|
| 1m Power Cable M12-8 Pole / open end / power plug | 10143091 |
| 3m Power Cable M12-8 Pole / open end / power plug | 10143092 |

# Cables for connection to Arc Sensors

For connecting Arc sensors to ArcAir software

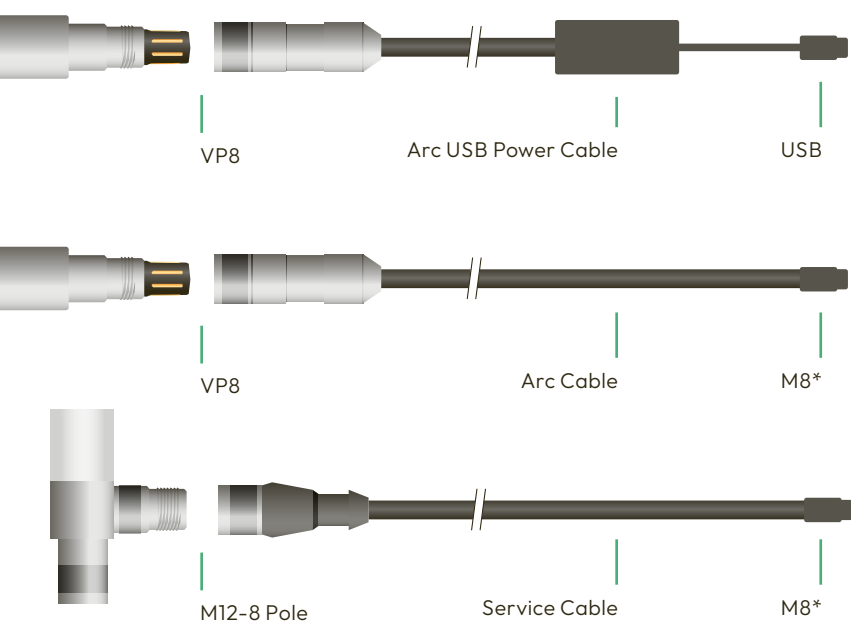

| Description                        | REF       |
|------------------------------------|-----------|
| 2 m Arc USB Power Cable VP8        | 243490-01 |
| 2 m Arc USB Power Cable M12-8 Pole | 243490-02 |
| 2 m Arc Cable VP8 / M8             | 242176    |
| 2 m Service Cable M12-8 Pole / M8  | 355339    |
| 2 m Service Cable M12-4 Pole / M8  | 355289    |

\*For connection with the Arc USB power cable or Arc Modbus OPC Converter

# Arc Accessories



## ArcAir Advanced License Key

The ArcAir Advanced License Key is a physical USB device that, when connected to a system running the standard ArcAir software, upgrades it to the Advanced version. This key is essential for enabling advanced features tailored for environments requiring adherence to Good Manufacturing Practices (GMP).


| Description                 | REF      |
|-----------------------------|----------|
| ArcAir Advanced License Key | 10155643 |



## USB RS485 Modbus Converter

Designed for wired communication between ArcAir and Visiwater DO fix cable sensor.

| Description                | REF    |
|----------------------------|--------|
| USB RS485 Modbus Converter | 242411 |

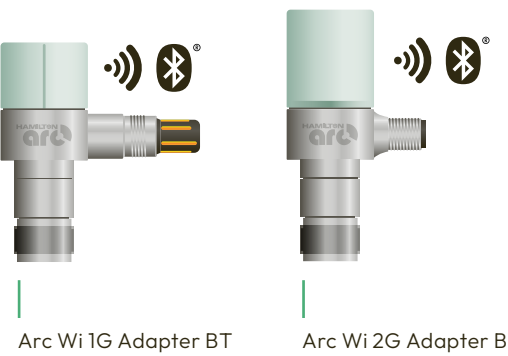

## Arc Wi Adapter BT

These Adapters are expanding the functionality of Arc sensors by providing wireless communication for local monitoring all analog and digital signals, in parallel to robust 4-20 mA signal, and simple sensor connection to the PCS.

| Description          | REF    |
|----------------------|--------|
| Arc Wi 1G Adapter BT | 243460 |
| Arc Wi 2G Adapter BT | 243470 |



## Arc View Mobile

This mobile device empowers the operator to monitor measurement values, calibrate Arc sensors and configure various parameters with a unified user interface for all Hamilton Arc sensors. The Arc View Mobile device is based on the Samsung Galaxy Tab Active tablet and comes pre-configured with the ArcAir application, app blocker application and power supply.

| Description              | REF      |
|--------------------------|----------|
| Arc View Mobile Basic    | 10071111 |
| Arc View Mobile Advanced | 10071113 |

# Digital Converters

Hamilton Arc Converters are gateway devices designed to seamlessly integrate Hamilton Arc sensors RS485 Modbus RTU protocol with various other industrial communication protocols, including PROFIBUS DP, PROFINET, FOUNDATION Fieldbus and OPC UA.

These gateways enable you to integrate Hamilton Arc Sensors in the protocol of your choice, thereby reducing programming time and costs while unlocking the full potential of our Arc technology.


Compare Hamilton's Converter Options

|                            |   | REF      | Protocol    | Max. Sensors | Application | Required Software                |
|----------------------------|---|----------|-------------|--------------|-------------|----------------------------------|
| Arc Modbus OPC Converter** |   | 10089359 | OPC UA      | 4            | Laboratory  | 1.10.0 (Web)<br>1.10.0 (SD Card) |
| Modbus Profinet Converter* |  | 10116586 | PROFINET    | 4            | Production  | 4.2 (Profinet script + GSDML)    |
| Modbus Profibus Converter* |  | 243555   | PROFIBUS DP | 4            | Production  | 4.2 (Profibus script + GSD)      |

\*No SCAN function on Incyte Arc  
\*\*Only read, writing functions to be done using and Arc Wi BT converter

# Hamilton customized products for our customers' special needs

The adaptation of standard products to customer's special needs is the main focus of our application engineering team. Customizing can include modifications to length, insertion depth, process adaptation of the sensor or changing the housing to a different material. Many more adaptations are possible.

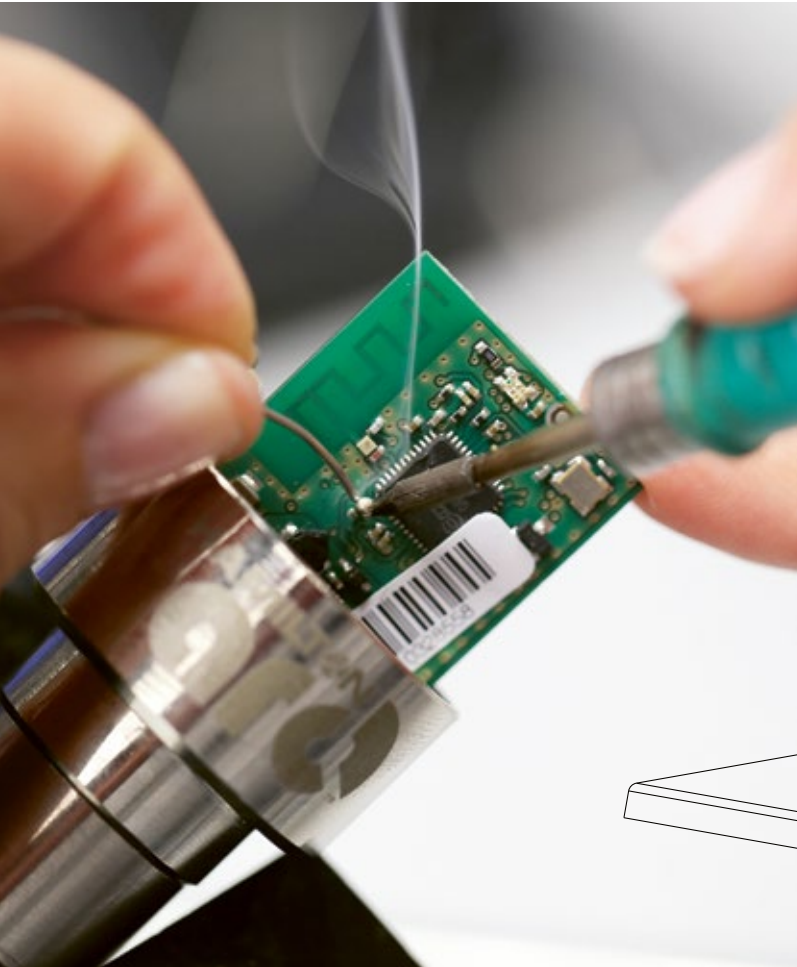

**HAMILTON**  
Customized Product  
Process Analytics

Need a custom housing or sensor? The Hamilton Customized Product team is happy to help design products for your specific application. Give us a call to learn more.

# Transmitter H100



The H100 is a transmitter for universal use in the chemical industry, power stations, biotechnology, food processing and pharmaceutical industries as well as in water/wastewater treatment. Icons guide the operator and show the sensor status.

Sensor failures are detected, shown on the display and an alarm is set. Calibration can be done manually or by selecting standard calibration media. After each calibration the sensor data will be shown and evaluated. The H100 is easy to handle and can be mounted on the wall as well as on a panel.



## User friendly, robust and reliable



### Easy to install, operate and calibrate

- Large terminal compartment and pre-assembled rear unit for easy installation
- The large display and intuitive menu structure ensure straightforward navigation
- Icons supply operating messages and signal unusual states
- Simple calibration with automatic buffer recognition



### Robust design

- Optional protective hood for additional protection against weather exposure and mechanical damage
- Wall, post/pipe, or panel mounting possible with optional panel- or pipe-mount kit



### Reliable instrument for process applications

- The sensor status and potential defects are continuously monitored for real time display of error or alarm
- Asymmetry potential, slope and response time are evaluated during calibration through the sensor lifetime for preventive maintenance indication
- The integrated calibration timer automatically indicates when calibration is required


## Accessories

Pipe-mount kit  
REF 243082

Panel-mount kit  
REF 243083

Protective hood  
REF 243084

Mounting plan (all dimensions in mm)

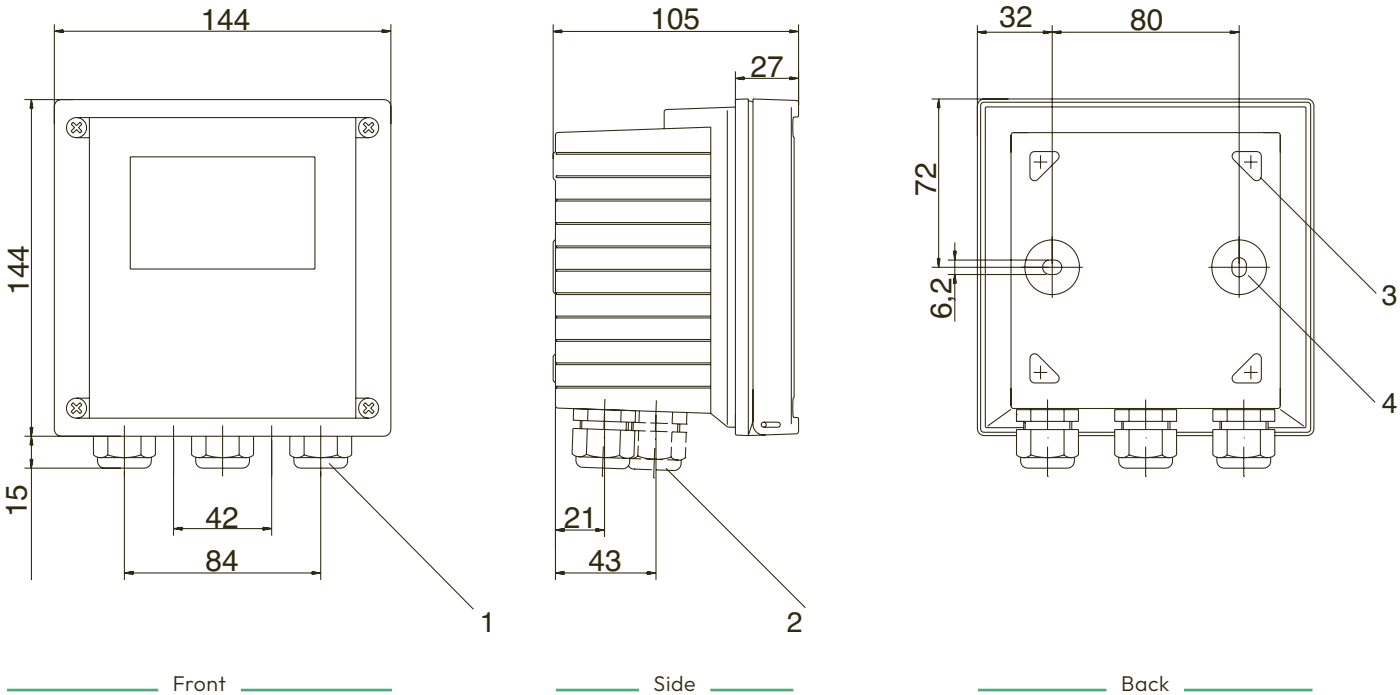

- 1 Cable gland (3x)
- 2 Knockouts for cable glands or 1/2" conduit (conduits not incl.)
- 3 Knockout for pipe mounting (4x)
- 4 Knockout for wall mounting (2x)

| Ordering Information |           |
|----------------------|-----------|
| Type                 | REF       |
| H100 pH              | 243080-01 |
| H100 Cond            | 243080-02 |
| H100 DO              | 243080-03 |



# Transmitter H220X

- family
- pH
- Cond
- ORP

Hamilton H220X Transmitters combine ease of use and reliability. They are available in different configurations: Analog pH / ORP, Conductivity and inductive Conductivity as well as Memosens® pH and Oxygen.

It has been designed for universal process application including use in pharmaceutical, chemical, food & beverage industries as well as water / waste water treatment. The self-explaining user interface ensures comfortable and intuitive handling. Hamilton H220X transmitters provide continuous sensor monitoring and preventive maintenance indication for maximal reliability. The Memosens® Technology allows plug & play with pre-calibrated Memosens® sensors. Predictive maintenance system detects when a sensor has to be cleaned, calibrated or replaced.



## Perfectly designed for hazardous areas and the Memosens® technology



### Easy to install, operate and calibrate

- The large display and intuitive menu structure ensure straightforward navigation
- Simple calibration with automatic buffer recognition
- Memosens® sensors can be connected for even more simple handling

### Robust design


- Suitable for Explosions protected areas (Ex II (1) 2G Ex ib [ia Ga] IIX T6/T4 Gb)
- Wall, post/pipe, or panel mounting possible
- Transmitter suitable for pollution degree 3



### Reliable instrument for process applications

- Sensor status and potential defects are continuously monitored; errors and alarms are displayed in real time
- Asymmetry potential, slope and response time are evaluated during calibration through the sensor lifetime for preventive maintenance indication
- User-guided commissioning, graphic display and plain text guidance for maximum operating safety


Mounting plan (all dimensions in mm)

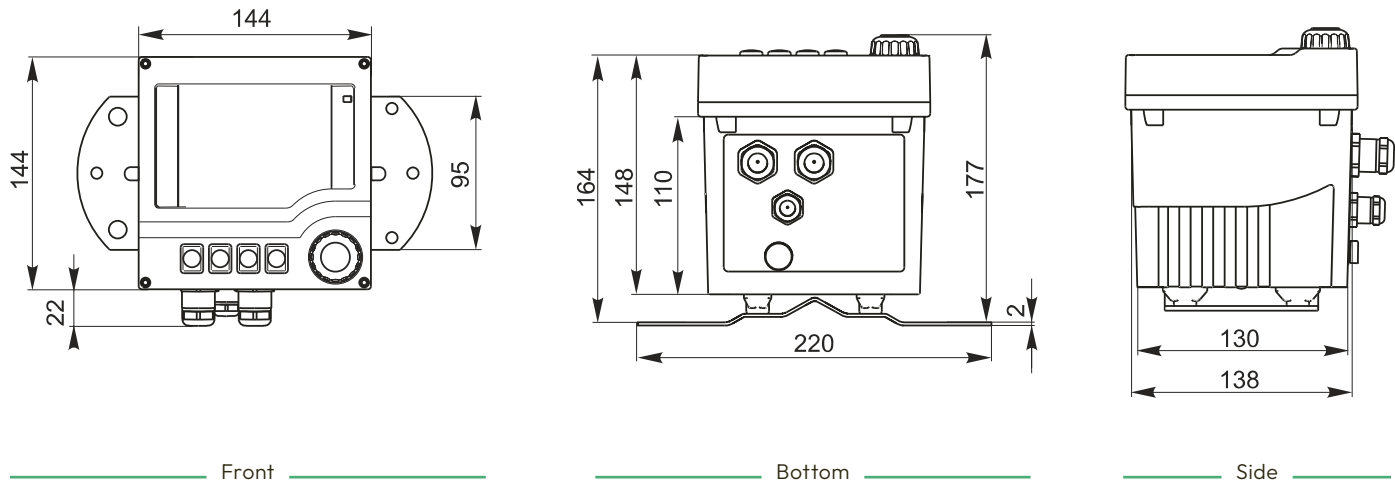

### The Transmitter H220X is available for the following parameters:

- pH / ORP analog
- pH / ORP Memosens
- Conductive Conductivity analog
- Inductive Conductivity analog
- eDO Memosens

More info about measuring ranges, temperature ranges, input and output signals can be found on the Hamilton website.

| Ordering Information               |   |                                 |                  |  |
|------------------------------------|---|---------------------------------|------------------|--|
| Transmitter H220X Family Structure |   |                                 |                  |  |
| 243081                             | Code  | Sensor Module                   |                  |  |
|                                    | 1   | Conductivity, Conductive Sensor |                  |  |
|                                    | 2   | Conductivity, Inductive Sensor  |                  |  |
|                                    | 3   | Digital, Memosens pH, ORP       |                  |  |
|                                    | 4   | Digital, Memosens eDO           |                  |  |
|                                    | 5   | pH or ORP (analog)              |                  |  |
|                                    |  | Code                            | Software         |  |
|                                    |   | 1                               | Standard Version |  |
|                                    |   | 2                               | Advanced Version |  |
| 243081 –                           |   |                                 |                  |  |




## Housings

Different processes have different requirements for sensors to provide an accurate and reliable measurement. Being in contact with the media is the most important one. In order to meet the different requirements, Hamilton has developed various kinds of housings: static, retractable, pressurizable, pneumatic, manual, weld-in and hygienic sockets.

No matter what type of housing is needed for a pipe or a vessel, on the following pages the right one for each application can be found.

**«Hamilton Housings:  
Our Flexibility for  
Your Precision»**

# Housings overview

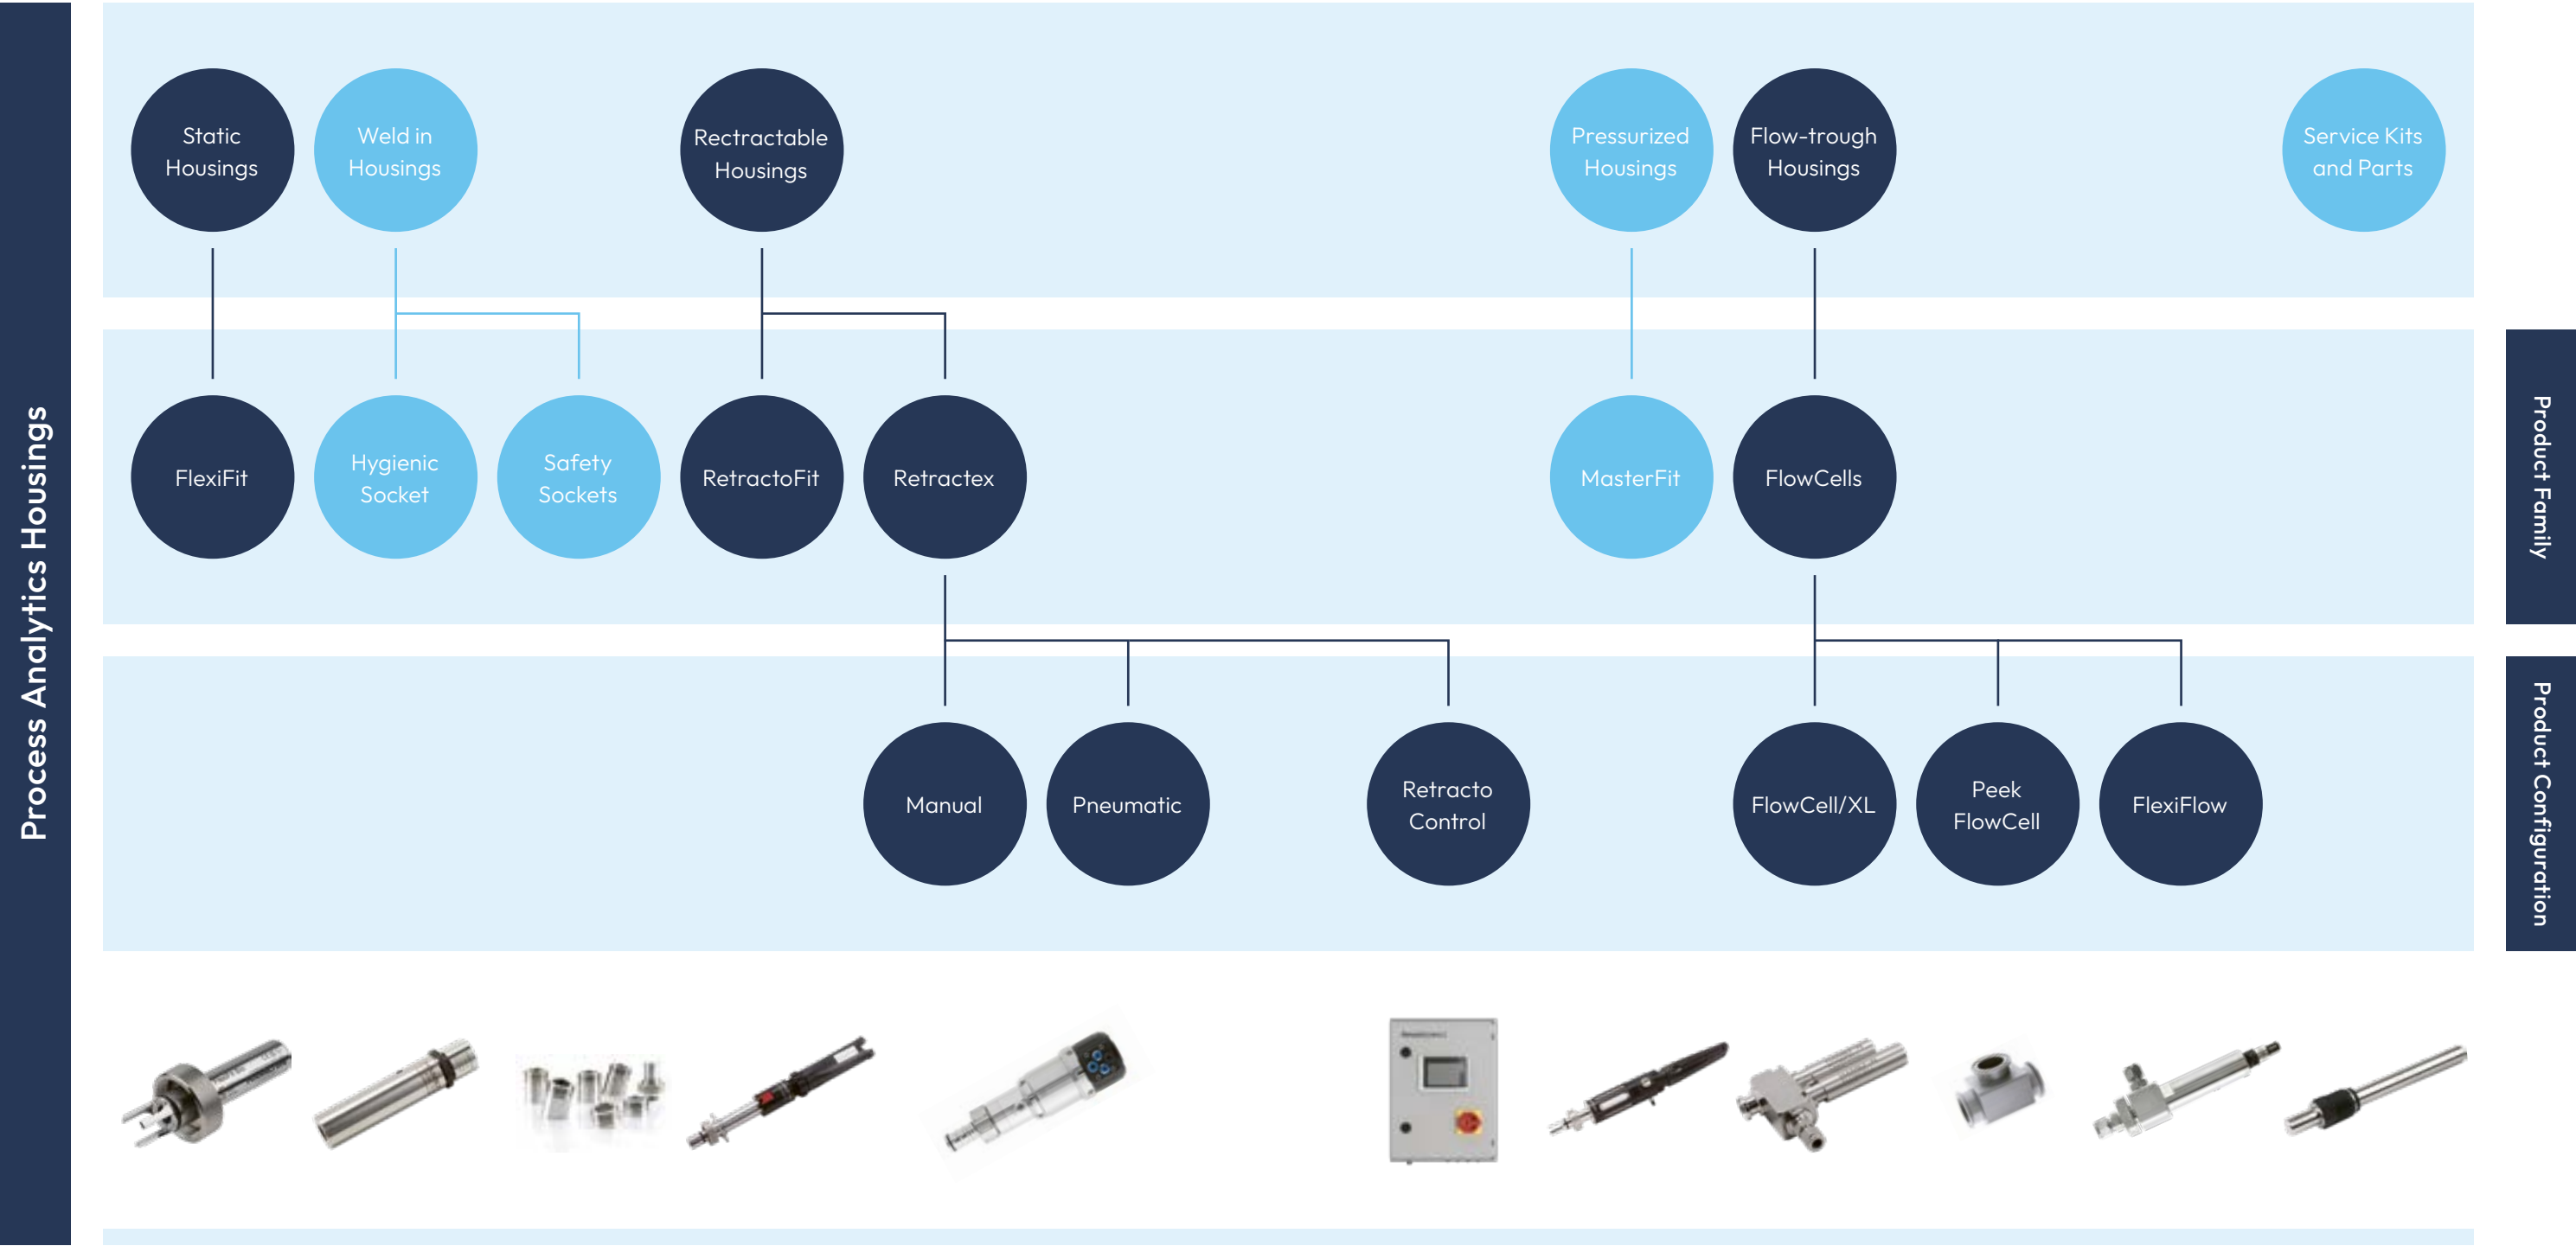

# FlexiFit family

With pins

Ingold (FlexiFit Bio)



34OP

Triclamp TC50



VariVent



Without pins

FlexiFit U Bio



34OP

FlexiFit U TC50



73IL

FlexiFit VV-15



15° angle

FlexiFit U TC50-15°



39IL

FlexiFit VV-15



The FlexiFit housings are designed for 120 mm sensors in different kinds of industries. A variety of process connections ensure the usability in the chemical industry as well as in hygienic processes. All FlexiFit have EPDM o-rings and the electropolished surface quality ( $R_a < 0.4 \mu\text{m}$ ) is shown on a certificate. They are suitable for autoclavation, CIP and SIP procedures.

There are further sealing replacement kits with different sealing materials available.

### Benefits

- Easy integration for PG13,5 sensors in various stainless steel tanks or pipes
- Optimal sensor positioning for best measurement performance
- 185 versions (connection, insertion length, angled, o-ring position, sensor protection) to meet all the requirements of process connections

| Ordering Information |                    |                 |                 |           |
|----------------------|--------------------|-----------------|-----------------|-----------|
| Type                 | Process Connection | Angle of sensor | Protective Pins | REF       |
| FlexiFit Bio         | G 1½               | 0°              | Yes             | 237331-OP |
| FlexiFit U Bio       | G 1½               | 0°              | No              | 237380-OP |
| FlexiFit VV-0        | Varivent®          | 0°              | No              | 237344    |
| FlexiFit VV-15       | Varivent®          | 15°             | No              | 237345    |
| FlexiFit TC50-33     | TC 1.5"            | 0°              | Yes             | 237341    |
| FlexiFit U TC50      | TC 1.5"            | 0°              | No              | 242335-IL |
| FlexiFit U TC50-15   | TC 1.5"            | 15°             | No              | 242325-IL |


U = Unprotected / TC = Triclamp

| Specifications                       |   |
|--------------------------------------|---|
| Wetted parts                         | Stainless Steel 1.4435                          |
| O-ring material                      | EPDM  |
| O-ring position                      | 22 to 55 mm (G 1½ )                             |
| Insertion length (TC)                | 3 to 75 mm<br>12 to 50 mm 15° version           |
| Pressure range (relative to ambient) | 0 to 6 bar g                                    |
| Temperature range                    | -10 to 140 °C                                   |
| Sensor thread                        | PG 13.5   |
| Sensor a-length                      | 120 mm  |
| Surface finish                       | $R_a < 0.4 \mu\text{m}$<br>(N5 electropolished) |

For more specifications see [www.hamiltoncompany.com](http://www.hamiltoncompany.com)

The Hamilton customized products team (HCP) is happy to offer special designs or materials on request.

### Accessories

-  Safety Socket → [128](#)
-  Matching Tools & Sensor Dummies → [163](#)

Service Kit FlexiFit Bio EPDM  
[REF 237366](#)

Service Kit FlexiFit Bio FKM  
[REF 237219](#)

Service Kit FlexiFit Bio FFKM  
[REF 237319](#)

Service Kit FlexiFit TC EPDM  
[REF 243575](#)

Service Kit FlexiFit VV EPDM  
[REF 243575](#)





# Safety Sockets



The Safety Sockets are hygienic weld-in sockets suitable for hygienic housings like the FlexiFit Bio. They are available for 3 different o-ring positions to cover different standards. Furthermore you can choose between two kinds of stainless steel and two different angles.

The Safety Sockets narrows at the o-ring positions and it seals only if the o-ring of the housing is exactly at the right place. If the process is under pressure, a dripping process medium can be a strong hint that the housing should not be loosened entirely. Therefore the Safety Sockets are suited for a wide variety of applications and installations.


### Benefits

- Safety design, leakage before total release of the housing
- Hygienic surface finish
- 3 different o-ring positions and two different stainless steels available

| Specifications                       |   |
|--------------------------------------|---|
| Wetted parts                         | Stainless Steel 1.4435 or 1.4404              |
| O-ring material for blind plug       | EPDM  |
| Pressure range (relative to ambient) | 0 to 50 bar g                                 |
| Temperature range                    | -30 to 160 °C                                 |
| Process connection                   | G 1¼  |
| Surface finish                       | R <sub>a</sub> < 0.4 µm (N5, electropolished) |

For more specifications see [www.hamiltoncompany.com](http://www.hamiltoncompany.com)

O-ring sealing position  
Choose the right OP

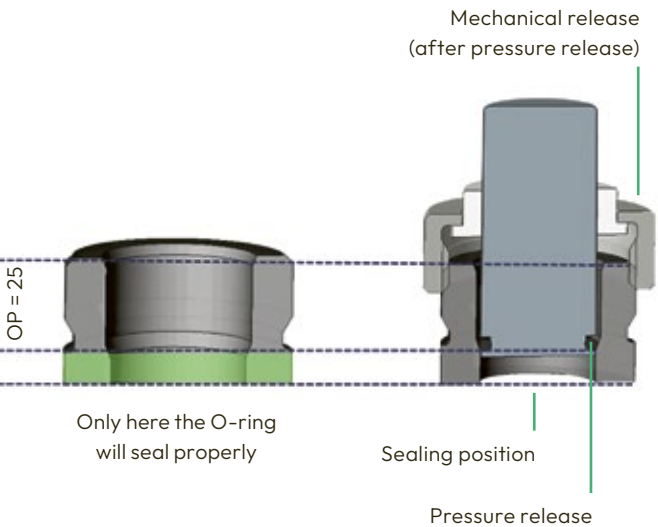

Having the Hamilton Socket in combination with a Hamilton housing and sensor ensures the best possible compatibility, hygienic sealing and most accurate measurement results.



| Ordering Information   |        |       |    |        |
|------------------------|--------|-------|----|--------|
| Type                   | Steel  | Angle | OP | REF    |
| Safety Socket          | 1.4404 | 15    | 25 | 242570 |
|                        | 1.4404 | 15    | 50 | 242571 |
|                        | 1.4404 | 15    | 55 | 242572 |
|                        | 1.4404 | 0     | 25 | 242573 |
|                        | 1.4404 | 0     | 50 | 242574 |
|                        | 1.4404 | 0     | 55 | 242575 |
|                        | 1.4435 | 15    | 25 | 242576 |
|                        | 1.4435 | 15    | 50 | 242577 |
|                        | 1.4435 | 15    | 55 | 242578 |
|                        | 1.4435 | 0     | 25 | 242579 |
|                        | 1.4435 | 0     | 50 | 242580 |
|                        | 1.4435 | 0     | 55 | 242581 |
| Safety weld-in socket* | 1.4404 | 0     | 28 | 243247 |
|                        | 1.4404 | 15    | 28 | 243248 |

| Accessories |        |    |        |
|-------------|--------|----|--------|
| Type        | Steel  | OP | REF    |
| Blind Plug  | 1.4404 | 25 | 242560 |
|             | 1.4404 | 50 | 242562 |
|             | 1.4404 | 55 | 242564 |
|             | 1.4435 | 25 | 242565 |
|             | 1.4435 | 50 | 242567 |
|             | 1.4435 | 55 | 242579 |

Only if the o-ring position of the Safety Socket and the housing or Blind Plug match, a proper sealing is guaranteed.


\*Socket for Retractable (B / BC) with OP 28 (Ingold G¼")

# Hygienic Socket



The Hygienic Socket with its space saving design and simple sterilization is ideal to weld in fermenters or small pipes. The advantages are numerous for many other applications in tanks or pipes for water treatment and in the pharmaceutical and chemical industries.

It is designed for 120 mm sensors and developed for easy installation and maintenance, improve the cleaning process and increase safety. Two “Live Guard” openings provide an indication of sealing failures. The sensor insertion depth can be varied for DO or Conductivity sensors by using the Hygienic Socket DO Adapter.

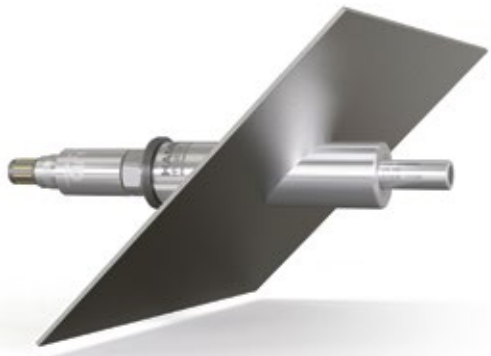


### Benefits

- Patented, hygienic and safe sealing design
- Flexible housing positioning for best measurement performance
- Easy and time saving o-ring replacement

| Specifications                       |  |
|--------------------------------------|--|
| Wetted parts                         | Stainless Steel 1.4435 or 1.4404 or 1.4571 or 2.4602 |
| O-ring material                      | EPDM   |
| Pressure range (relative to ambient) | 0 to 16 bar g  |
| Temperature range                    | -10 to 140 °C  |
| Sensor thread                        | PG 13.5  |
| Sensor a-length                      | 120 mm   |
| Surface finish                       | R <sub>a</sub> < 0.4 µm (N5)                         |

For more specifications see [www.hamiltoncompany.com](http://www.hamiltoncompany.com)

Hygienic Socket with 120 mm pH Sensor

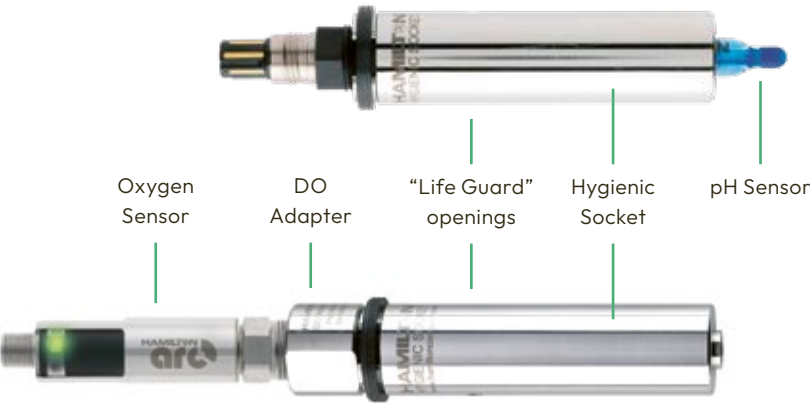

Hygienic Socket with 120 mm Oxygen Sensor and DO Adapter

| Ordering Information   |        |
|------------------------|--------|
| Type                   | REF    |
| Hygienic Socket 1.4404 | 242535 |
| Hygienic Socket 1.4435 | 242545 |
| Hygienic Socket 1.4571 | 242548 |
| Hygienic Socket 2.4602 | 242550 |

Only one wetted o-ring. Reduced risk of sensor damage and increased safety due to the patented system that compresses the o-ring only when the sensor is inserted and gets tightened.



### Accessories

Matching Tools & Sensor Dummies → [163](#)

Hygienic Socket DO Adapter  
[REF 242538](#)

Replacement Kit Seal Pusher  
[REF 242532](#)

Service Kit Hygienic Socket EPDM  
[REF 242595](#)

Service Kit Hygienic Socket FKM  
[REF 242596](#)

Service Kit Hygienic Socket Silicone  
[REF 242597](#)

Service Kit Hygienic Socket FFKM  
[REF 242598](#)



# RetractoFit Easy



The RetractoFit Easy is a straightforward retractable probe housing crafted from stainless steel or plastic. It's designed for accommodating Ø12-120mm sensors on tanks and pipes. With an integrated locking mechanism, it securely holds the sensor in place while enabling effortless alignment of the protective cage. This ensures the inserted sensor is shielded from mechanical impacts and can nevertheless be aligned for the best possible measurement results.

- Benefits
- Compact design
  - Manually retractable
  - Suitable for processes up to 6bar

Not suitable for Conducell and Incyte Sensors.

| Specifications            |  |
|---------------------------|--|
| Process pressure          | 0 to 6 bar   |
| Process temperature       | 10 to 80 °C  |
| Ambient temperature       | -10 to 70 °C   |
| Sensors                   | 120 mm 12 PG13.5   |
| Material                  | Stainless steel 1.4404 (316L)<br>< R <sub>a</sub> 0.78µm; PP |
| Sealings                  | EPDM; FPM (Viton)  |
| Process connections       | Thread NPT 1"<br>Thread G 1"<br>Ingold DN25 G 1¼"            |
| Drive unit                | manually operated; axially movable                           |
| Feedback                  | without  |
| Length of protection cage | 36 mm  |

For more specifications see [www.hamiltoncompany.com](http://www.hamiltoncompany.com)

## Accessories

- RetractoFit Easy mounting tool  
[REF 243249](#)
- Safety weld-in socket straight, OP 28, 1.4404 incl. 3.1 Cert.  
[REF 243247](#)
- Safety weld-in socket inclined, OP 28, 1.4404 incl. 3.1 Cert.  
[REF 243248](#)
- Blind plug DN25 (Ingold) G1 ¼" 1.4404 EPDM, OP28  
[REF 243251](#)

| Ordering Information    |                         |  |  |                       |   |
|-------------------------|-------------------------|--|--|-----------------------|---|
| 243293 RetractoFit Easy |                         |  |  |                       |   |
| Code                    | Material (wetted parts) |  |  |                       |   |
|                         | 1                       | PP   |  |                       |   |
|                         | 2                       | Stainless steel 1.4404 / 316L (3.1 steel certificate included) |  |                       |   |
|                         | 0                       | Special Design   |  |                       |   |
|                         |                         | Sealing Material (wetted sealings)                             |  |                       |   |
|                         |                         | Code   |  |                       |   |
|                         |                         | 1  | EPDM / USP VI (elastomer certificate included) |                       |   |
|                         |                         | 2  | FKM (Viton)                                    |                       |   |
|                         |                         | 0  | Special Design                                 |                       |   |
|                         |                         |  | Sensor   |                       |   |
|                         |                         |  | Code   |                       |   |
|                         |                         |  | 1  | 120mm PG 13,5 Ø 12 mm |   |
|                         |                         |  | 0  | Special Design        |   |
|                         |                         |  |  | Process Connection    |   |
|                         |                         |  |  | Code                  |   |
|                         |                         |  |  | 1                     | MNPT 1"                                   |
|                         |                         |  |  | 2                     | Thread G1" male                           |
|                         |                         |  |  | 3                     | Ingold DN25 G1 1/4" O-Ring-position 28 mm |
|                         |                         |  |  | 0                     | Special Design                            |
|                         |                         |  |  | Cable protection      |   |
|                         |                         |  |  | Code                  |   |
|                         |                         |  |  | 1                     | without                                   |
|                         |                         |  |  | 2                     | with cable protection*                    |
| 243293 -                |                         |  |  | 0                     | Special Design                            |

\*The cable protection is not compatible with the Dencytee, CO<sub>2</sub>NTROL and Incyte sensors. Special cable protection available.



RetractoFit Easy with Ingold connection and cable protection



RetractoFit Easy version without cable protection



# RetractoFit



The RetractoFit is a retractable housing designed for 225 mm sensors in industrial applications. It allows the operator to mount and dismount sensors while the process is running. Safe sensor handling during process is guaranteed because insertion into the vessel without a sensor is impossible so is removal while in the measuring position. It is easy to use and maintain: only one press on the red button is needed to move the sensor into or out of the process. All o-rings can easily be replaced by the operator without special tools. The RetractoFit is available in different versions.

When the housing with an Arc sensor, VisiFerm mA, VisiTrace mA and protective sleeve the aperture (hole) in the protective sleeve must be enlarged or the housing has to be used without the protective sleeve. Wireless adapters on top of Arc sensors can only be used without the protective sleeve.

## Benefits

- Hygienic design – avoid contamination
- Safe sensor extraction during a running process
- Easy, cost-effective manual retractable measuring point

| Specifications                       |  |
|--------------------------------------|--|
| Wetted parts                         | RetractoFit: Stainless Steel 1.4571<br>RetractoFit PEEK: PEEK (FDA approved) |
| O-ring material                      | FKM  |
| O-ring position                      | RetractoFit: 22.5 mm<br>RetractoFit PEEK: 25 mm                              |
| Pressure range (relative to ambient) | 0 to 6 bar g   |
| Temperature range                    | -10 to 130 °C  |
| Sensor thread                        | PG 13.5  |
| Sensor a-length                      | 225 mm   |
| Surface finish                       | RetractoFit: $R_a < 0.4 \mu\text{m}$<br>(N5 electropolished)                 |

For more specifications see [www.hamiltoncompany.com](http://www.hamiltoncompany.com)

## Accessories


- Safety Socket → [128](#)
- Matching Tools & Sensor Dummies → [163](#)

Service Kit RetractoFit FKM  
[REF 237239](#)

Service Kit RetractoFit FFKM  
[REF 237339](#)

Service Kit RetractoFit PEEK  
[REF 237388](#)

## Dimensional drawings / RetractoFit (all dimensions in mm)

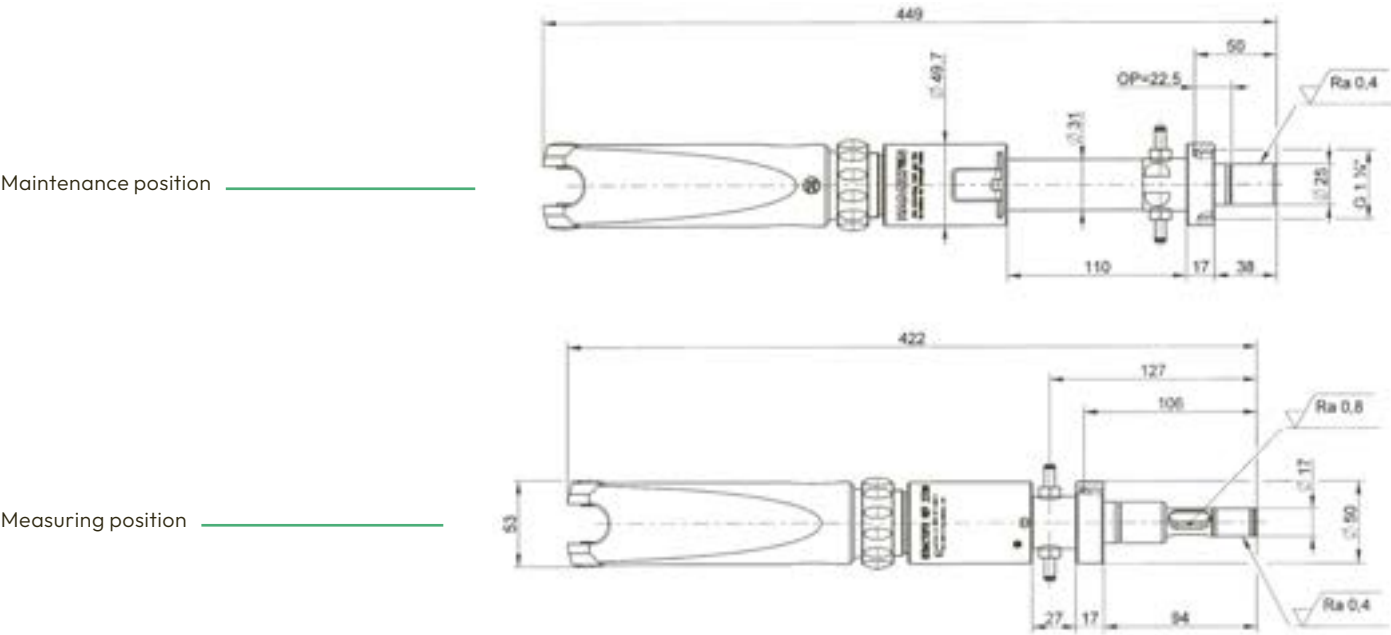

| Ordering Information |                    |        |
|----------------------|--------------------|--------|
| Type                 | Process Connection | REF    |
| RetractoFit          | G 1½               | 237240 |
| RetractoFit PEEK 25  | G 1½               | 237490 |






# RetractoFit Bio



The RetractoFit Bio is a retractable housing designed for 225 mm sensors in hygienic applications in the biotechnology, food & beverage and the pharmaceutical industry. It allows the operator to mount and dismount sensors while the process is running. Safe sensor handling during the process is guaranteed because insertion into a vessel without sensor is impossible so is removal while in the measuring position. It is easy to use and maintain: only one press on the red button is needed to move the sensor into or out of the process. All o-rings can be easily be replaced by the operator without special tools.

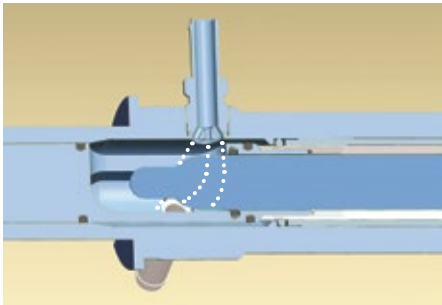

## Benefits

- Integral safety mechanism
- Sensor can be withdrawn from the process for cleaning, calibration or replacement
- Special hygienic design of cleaning chamber
- Easy maintenance

| Specifications                       |                                  |
|--------------------------------------|----------------------------------|
| Wetted parts                         | Stainless Steel 1.4435           |
| O-ring material                      | EPDM                             |
| O-ring position                      | 22 mm and 55 mm                  |
| Pressure range (relative to ambient) | 0 to 6 bar g                     |
| Temperature range                    | -10 to 140 °C                    |
| Sensor thread                        | PG 13.5                          |
| Sensor a-length                      | 225 mm                           |
| Surface finish                       | Ra < 0.4 µm (N5 electropolished) |

For more specifications see [www.hamiltoncompany.com](http://www.hamiltoncompany.com)


## Accessories

- Safety Socket → [128](#)
- Matching Tools & Sensor Dummies → [163](#)

Service Kit RetractoFit Bio (EPDM)  
[REF 237338](#)

«Did you know... that the RetractoFit Bio has a special rinsing chamber with angled connections for cleaning solutions and special inlet construction guarantees an entire cleaning of the chamber through a swirl effect.»


Dimensional drawings / RetractoFit Bio 25 (all dimensions in mm)

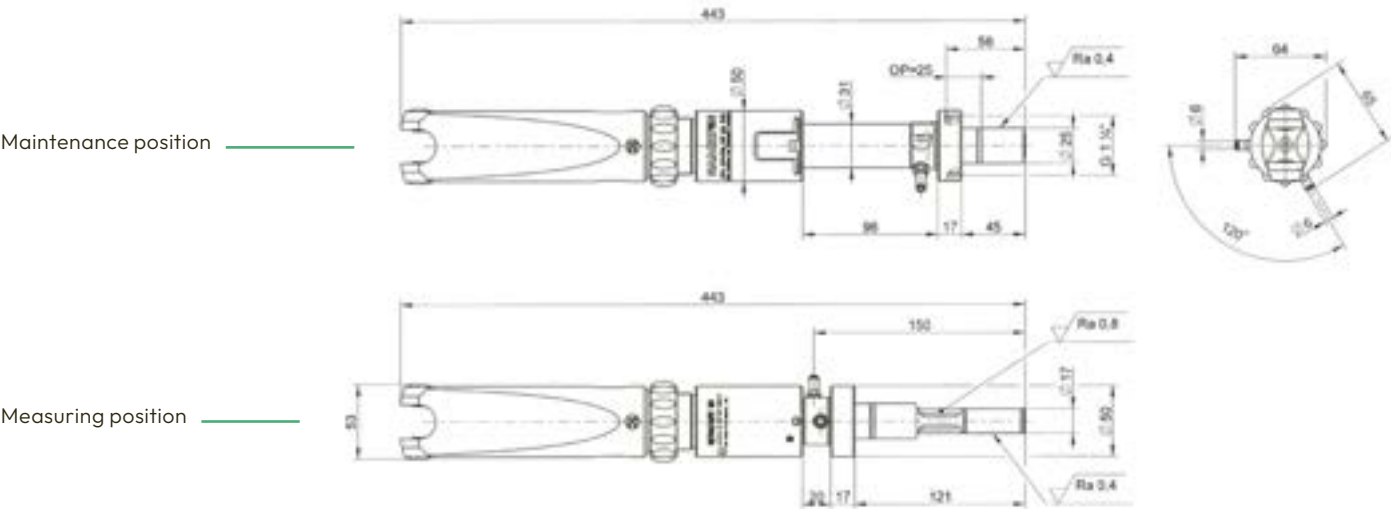

| Ordering Information |                    |        |
|----------------------|--------------------|--------|
| Type                 | Process Connection | REF    |
| RetractoFit Bio 25   | G 1½               | 237480 |
| RetractoFit Bio 55   | G 1½               | 237440 |



# Retractex

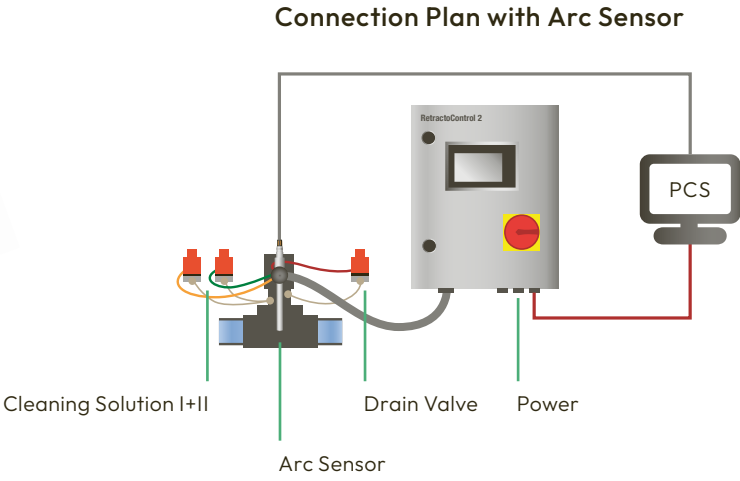


Retractable housings are available in various designs tailored to meet the needs of chemical or biological applications. Retractable housings make it possible to remove the sensor while the process is still running. This provides the convenience to clean or calibrate the sensor without interrupting the process and further the possibility to extract the sensor during particularly intense processes, Providing the maximum protection of the sensor. It is available in both manual and pneumatic versions.

The RetractoControl 2 is an auto-mated electro-pneumatic control system for our Retractable housings. The control system was developed and adapted to the Retractable. A plug and play solution for automatic sensor retraction and cleaning processes with customizable programming.

The Retractable enables exceptional measurement precision, extended sensor lifespan, and cost savings through automation. Whether you require a manual or pneumatic version, the Retractable is an essential housing for ensuring accurate, reliable measurements that meet your specific needs.

# RetractoControl 2



| Specifications                    |                               |
|-----------------------------------|-------------------------------|
| Dimensions (W/H/D)                | 300 mm x 400 mm x 250 mm      |
| Ambient temperature               | 0 to 140 °C                   |
| Transport and storage temperature | -10 to 60 °C                  |
| Relative humidity                 | 10 to 95 %, non-condensing    |
| Protection class                  | IP 54, with guard door closed |
| Voltage supply                    | 24 VDC (+/-10 %)              |
| Input for external contacts       | 24 VDC                        |
| Maximum current consumption       | 1.6 A                         |
| Output                            | 24 VDC                        |

For more specifications see [www.hamiltoncompany.com](http://www.hamiltoncompany.com)

## Accessories

- Wall Mount Set (plastic) RetractoControl 2  
REF 10110475-1
- Wall Mount Set (steel) RetractoControl 2  
REF 10110475-2

| Ordering Information   |  |  |  |  |  |  |
|--|--|--|--|--|--|--|
| 10110474   | Automatic Control Unit for Retractable |  |  |  |  |  |
| <div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div> |  |  |  |  |  |  |

# Retractex B



The retractable pneumatic or manual housing Retractex B was designed for sanitary applications in biotechnology, food & beverage and pharmaceutical industry. The compact design with a stroke of only 36 mm keeps wear on seals to a minimum and creates excellent reliability – day and night, all year long. It can be cleaned easily and thoroughly in place, including the space between the socket and rinsing chamber. The Retractex B with its patented HyCIP cleaning principle offers the best available cleaning efficiency for Ingold sockets (G 1¼”).

It is designed for 12 mm sensors and is equipped with several safety features (e.g. no sensor – no insertion, window to check seals for leakage etc.) to provide operator safety. It is available with various process connections that can be used with all vessels used in these branches.

**How does the HyCIP process connection work?**  
In cleaning position, the sensor can be cleaned and sterilized together with all wetted seals. In the HyCIP connection the cleaning solution is directed between housing and socket up to the process seal so the most remote parts of the chamber are rinsed. Thus HyCIP housings are unmatched for their cleaning performance of the sensor and of all relevant seals.

## Benefits

- Extremely compact design
- Integrated safety concept – no sensor – no insertion
- Very low maintenance
- Sterile safety and unique cleaning efficiency with HyCIP

| Specifications                       |   |
|--------------------------------------|---|
| Wetted parts                         | Stainless Steel 1.4404                    |
| O-ring material                      | EPDM or FKM                               |
| O-ring position                      | 25 mm, 50 mm and 55 mm                    |
| Pressure range (relative to ambient) | 0 to 16 bar g (120 °C), 10 bar g (140 °C) |
| Temperature range                    | -10 to 140 °C                             |
| Sensor a-length                      | 225 mm                                    |
| Surface finish                       | R <sub>a</sub> < 0.8 µm (N6)              |

For more specifications see [www.hamiltoncompany.com](http://www.hamiltoncompany.com)

| Ordering Information |  |
|----------------------|--|
| 243240               | Retractex B (pneumatic)                                |
| 243275               | Retractex B M (manual)                                 |
| Code                 | Material (wetted parts)                                |
| 1                    | Stainless Steel 1.4404 (material certificate included) |
| 0                    | Special Design   |
| Code                 | Sealing Material (wetted sealings)                     |
| 1                    | EPDM/FEP; FDA USP VI (elastomer certificate included)  |
| 2                    | FKM/FEP  |
| 0                    | Special Design   |
| Code                 | Sensor   |
| 1                    | 225 mm PG13,5  |
| 0                    | Special Design   |
| Code                 | Process Connection                                     |
| 1                    | Ingold (G 1¼”) o-Ring Position 28 mm                   |
| 2                    | Varivent N DN 40-125                                   |
| 3                    | TriClamp 1,5” (OD Ø 50,5 mm)                           |
| 4                    | TriClamp 2” (OD Ø 64 mm)                               |
| 5                    | NEUMO BioControl 50                                    |
| 6                    | DIN 11851 DN50 (Milchrohr)                             |
| 7                    | HyCIP for Ingold (G 1¼”) o-Ring Position 25 mm         |
| 8                    | HyCIP for Ingold (G 1¼”) o-Ring Position 50 mm         |
| 9                    | HyCIP for Ingold (G 1¼”) o-Ring Position 55 mm         |
| 0                    | Special Design   |
| Code                 | Cleaning Connection                                    |
| 1                    | G ½” thread (internal)                                 |
| 2                    | G ¾” thread (internal)                                 |
| 3                    | ¼” NPT (internal)                                      |
| 4                    | TriClamp ¾” Ø 4 mm                                     |
| 9                    | TriClamp ¾” Ø 10,3 mm (Sartorius)                      |
| 0                    | Special Design   |
| Code                 | Position switch  |
| 1                    | Pneumatic  |
| 2                    | Electrical (Namur)                                     |
| 0                    | Special Design   |
| 2432XX –             |  |

## Accessories

 **Matching Tools & Sensor Dummies**  
→ [163](#)

Service Kit Retractex B  
EPDM/FEP (FDA)  
Ingold (not HyCip)  
[REF 243241](#)

Service Kit Retractex B  
EPDM/FEP (FDA) all  
except Ingold or HyCIP  
[REF 243242](#)

Service Kit Retractex B  
EPDM/FEP (FDA) HyCip  
[REF 243243](#)

Service Kit Retractex B  
FKM/FEP Ingold  
(not HyCip)  
[REF 243244](#)

Service Kit Retractex B  
FKM/FEP all except  
Ingold or HyCIP  
[REF 243245](#)

Service Kit Retractex B  
FKM/FEP HyCIP  
[REF 243246](#)

Service tool PG13.5  
for retractable housing  
[REF 242231](#)

Unlocking device  
for insertion rod  
Retractex M  
[REF 243261](#)





# Retractex BC Steel



The retractable pneumatic or manual housing Retractex BC is designed for applications in the chemical industry. The compact design with a stroke of only 36 mm keeps wear on seals to a minimum and creates to excellent reliability – day and night, all year long. It can be cleaned easily and thoroughly in place. It is designed for 12 mm sensors and is equipped with several safety features (e.g. no sensor – no insertion, window to check seals for leakage etc.) to provide operator safety. The Retractex BC comes with a G 1¼” process connection and is available with two different o-ring positions.

**Cleaning of the Retractex BC?**  
In cleaning position, the sensor can be cleaned while the process is running. The advantage of the insertion tube is the short way for insertion. A PTFE scraper with o-ring guarantees that dirt stays outside of the housing and does not harm the o-ring.

### Benefits

- Extremely compact design
- Integrated safety concept – no sensor – no insertion
- Very low maintenance

| Specifications                       |   |
|--------------------------------------|---|
| Wetted parts                         | Stainless Steel 1.4404 or 2.4602          |
| O-ring material                      | EPDM or FKM or FFKM                       |
| Pressure range (relative to ambient) | 0 to 16 bar g (120 °C), 10 bar g (140 °C) |
| Temperature range                    | -10 to 140 °C                             |
| Sensor a-length                      | 225 mm                                    |
| Surface finish                       | R <sub>a</sub> < 0.8 µm (N6)              |

For more specifications see [www.hamiltoncompany.com](http://www.hamiltoncompany.com)

| Ordering Information |                                |  |                                    |                 |                                      |  |  |
|----------------------|--------------------------------|--|------------------------------------|-----------------|--------------------------------------|--|--|
| 237730               | Retractex BC Steel (pneumatic) |  |                                    |                 |                                      |  |  |
| 237735               | Retractex BC Steel M (manual)  |  |                                    |                 |                                      |  |  |
|                      | Code                           | Material (wetted parts)                                |                                    |                 |                                      |  |  |
|                      | 1                              | Stainless Steel 1.4404 / 316L (Declaration of Quality) |                                    |                 |                                      |  |  |
|                      | 2                              | Alloy C22 2.4602                                       |                                    |                 |                                      |  |  |
|                      | 0                              | Special Design   |                                    |                 |                                      |  |  |
|                      | ↓                              | Code   | Sealing Material (wetted sealings) |                 |                                      |  |  |
|                      |                                | 1  | EPDM/FDA USP VI                    |                 |                                      |  |  |
|                      |                                | 2  | FKM (Viton)                        |                 |                                      |  |  |
|                      |                                | 3  | FFKM (Kalrez)                      |                 |                                      |  |  |
|                      |                                | 0  | Special Design                     |                 |                                      |  |  |
|                      |                                | ↓  | Code                               | Sensor          |                                      |  |  |
|                      |                                |  | 1                                  | 225 mm PG13,5   |                                      |  |  |
|                      |                                |  | 0                                  | Special Design  |                                      |  |  |
|                      |                                |  | ↓                                  | Code            | Process Connection                   |  |  |
|                      |                                |  |                                    | 1               | Ingold (G 1½”) o-Ring Position 28 mm |  |  |
|                      |                                |  |                                    | 2               | Ingold (G 1½”) o-Ring Position 50 mm |  |  |
|                      |                                |  |                                    | 0               | Special Design                       |  |  |
|                      |                                |  | ↓                                  | Code            | Cleaning Connection                  |  |  |
|                      |                                |  |                                    | 1               | G 1⅝” thread (internal)              |  |  |
|                      |                                |  |                                    | 2               | G ¾” thread (internal)               |  |  |
|                      | 3                              | ¾” NPT (internal)                                      |                                    |                 |                                      |  |  |
|                      | 0                              | Special Design   |                                    |                 |                                      |  |  |
|                      | ↓                              | Code   |                                    | Position switch |                                      |  |  |
|                      |                                | 1  | Pneumatic                          |                 |                                      |  |  |
|                      |                                | 2  | Electrical (Namur)                 |                 |                                      |  |  |
|                      | 0                              | Special Design   |                                    |                 |                                      |  |  |
|                      | 23773X –                       |  |                                    |                 |                                      |  |  |

### Accessories

 **Matching Tools & Sensor Dummies**  
→ [163](#)

Service Kit Retractex BC EPDM  
[REF 237736](#)

Service Kit Retractex BC FKM (Viton)  
[REF 237737](#)

Service Kit Retractex BC FFKM (Kalrez)  
[REF 237738](#)

Scraper ring 18 x 6 x 1 mm PTFE (BC)  
[REF 237733](#)

Service tool PG13.5 for retractable housing  
[REF 242231](#)

Unlocking device for insertion rod Retractex M  
[REF 243261](#)


Set blind plug G1⅝” 1.4301/316 for cleaning chamber  
[REF 243206](#)

Safety weld-in socket straight, OP 28, 40mm, 1.4404/316L inkl. Mat.-Cert.  
[REF 243247](#)

Safety weld-in socket inclined, OP 28, 40mm, 1.4404/316L inkl. Mat.-Cert.  
[REF 243248](#)



# Retractex BC Plastic

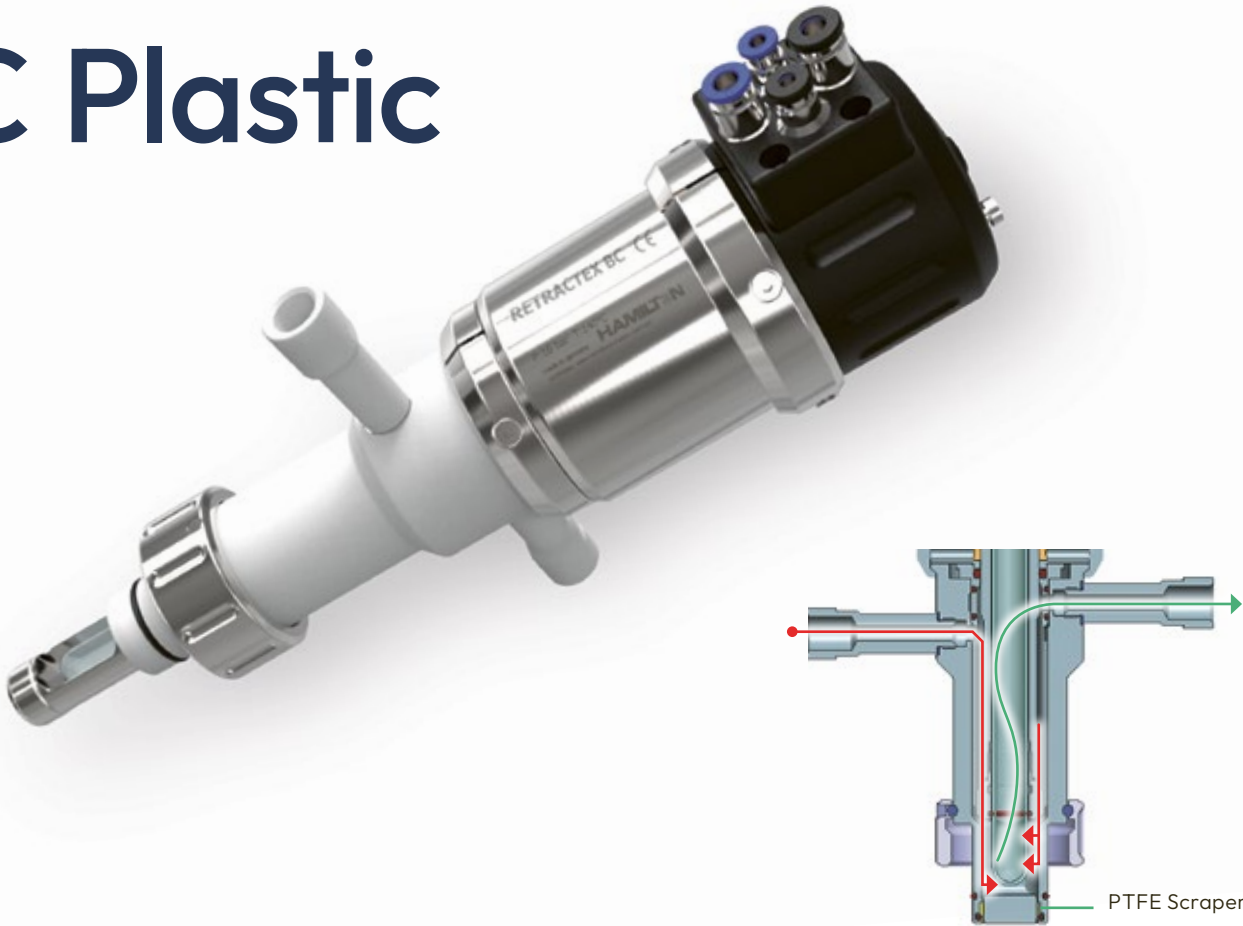

The retractable pneumatic or manual housing Retractex BC was designed for applications in the chemical industry. The compact design with a stroke of only 36 mm keeps wear on seals to a minimum and creates excellent reliability – day and night, all year long. It can be cleaned easily and thoroughly in place. It is designed for 12 mm sensors and is equipped with several safety features (e.g. no sensor – no insertion, window to check seals for leakage etc.) to provide operator safety. The Retractex BC comes with a G 1¼” process connection and is available with two different o-ring positions.

**Cleaning of the Retractex BC?**  
In cleaning position, the sensor can be cleaned while the process is running. The advantage of the insertion tube is the short way for insertion. A PTFE scraper with o-ring guarantees that dirt stays outside of the housing and does not harm the o-ring.

### Benefits

- Extremely compact design
- Integrated safety concept- no sensor – no insertion
- Very low maintenance
- Easy installation of the pneumatic housing with color coded connectors
- Choice of 3 different plastics

| Specifications                       |   |
|--------------------------------------|---|
| Wetted parts                         | PVDF or PEEK or PP                        |
| O-ring material                      | EPDM or FKM or FFKM                       |
| Pressure range (relative to ambient) | 0 to 16 bar g (120 °C), 10 bar g (140 °C) |
| Temperature range                    | -10 to 140 °C                             |
| Sensor a-length                      | 225 mm                                    |
| Surface finish                       | R <sub>a</sub> < 0.8 µm (N6)              |

For more specifications see [www.hamiltoncompany.com](http://www.hamiltoncompany.com)

| Ordering Information |                                  |                                      |  |  |  |
|----------------------|----------------------------------|--------------------------------------|--|--|--|
| 237740               | Retractex BC Plastic (pneumatic) |                                      |  |  |  |
| 237745               | Retractex BC Plastic M (manual)  |                                      |  |  |  |
| Code                 | Material (wetted parts)          |                                      |  |  |  |
| 1                    | PP                               |                                      |  |  |  |
| 2                    | PVDF / 2.4602                    |                                      |  |  |  |
| 3                    | PEEK                             |                                      |  |  |  |
| 0                    | Special Design                   |                                      |  |  |  |
|                      | Code                             | Sealing Material (wetted sealings)   |  |  |  |
|                      | 1                                | EPDM/FDA USP VI                      |  |  |  |
|                      | 2                                | FKM (Viton)                          |  |  |  |
|                      | 3                                | FFKM (Kalrez)                        |  |  |  |
|                      | 0                                | special                              |  |  |  |
|                      | Code                             | Sensor                               |  |  |  |
|                      | 1                                | 225 mm PG13,5                        |  |  |  |
|                      | 0                                | Special Design                       |  |  |  |
|                      | Code                             | Process Connection                   |  |  |  |
|                      | 1                                | Ingold (G 1¼”) o-Ring Position 25 mm |  |  |  |
|                      | 0                                | Special Design                       |  |  |  |
|                      | Code                             | Cleaning Connection                  |  |  |  |
|                      | 1                                | G 1⅛” thread (internal)              |  |  |  |
|                      | 2                                | G ¼” thread (internal)               |  |  |  |
|                      | 3                                | ¼” NPT (internal)                    |  |  |  |
|                      | 0                                | Special Design                       |  |  |  |
|                      | Code                             | Position switch                      |  |  |  |
|                      | 1                                | Pneumatic                            |  |  |  |
|                      | 2                                | Electrical (Namur)                   |  |  |  |
|                      | 0                                | Special Design                       |  |  |  |
| 23774X -             |                                  |                                      |  |  |  |

### Accessories

Matching Tools & Sensor Dummies  
→ [163](#)

Service Kit Retractex BC EPDM  
[REF 237736](#)

Service Kit Retractex BC FPM (Viton)  
[REF 237737](#)

Service Kit Retractex BC FFPM (Kalrez)  
[REF 237738](#)

Scraper ring 18 x 6 x 1 mm PTFE (BC)  
[REF 237733](#)

Service tool PG13.5 for retractable housing  
[REF 242231](#)


Unlocking device for insertion rod Retractex M  
[REF 243261](#)

Set blind plug G1⅛” PVDF for cleaning chamber  
[REF 243224](#)

Set blind plug G1⅛” PP for cleaning chamber  
[REF 237746](#)

Set blind plug G1⅛” PEEK for cleaning chamber  
[REF 237747](#)

# Retractex C Steel

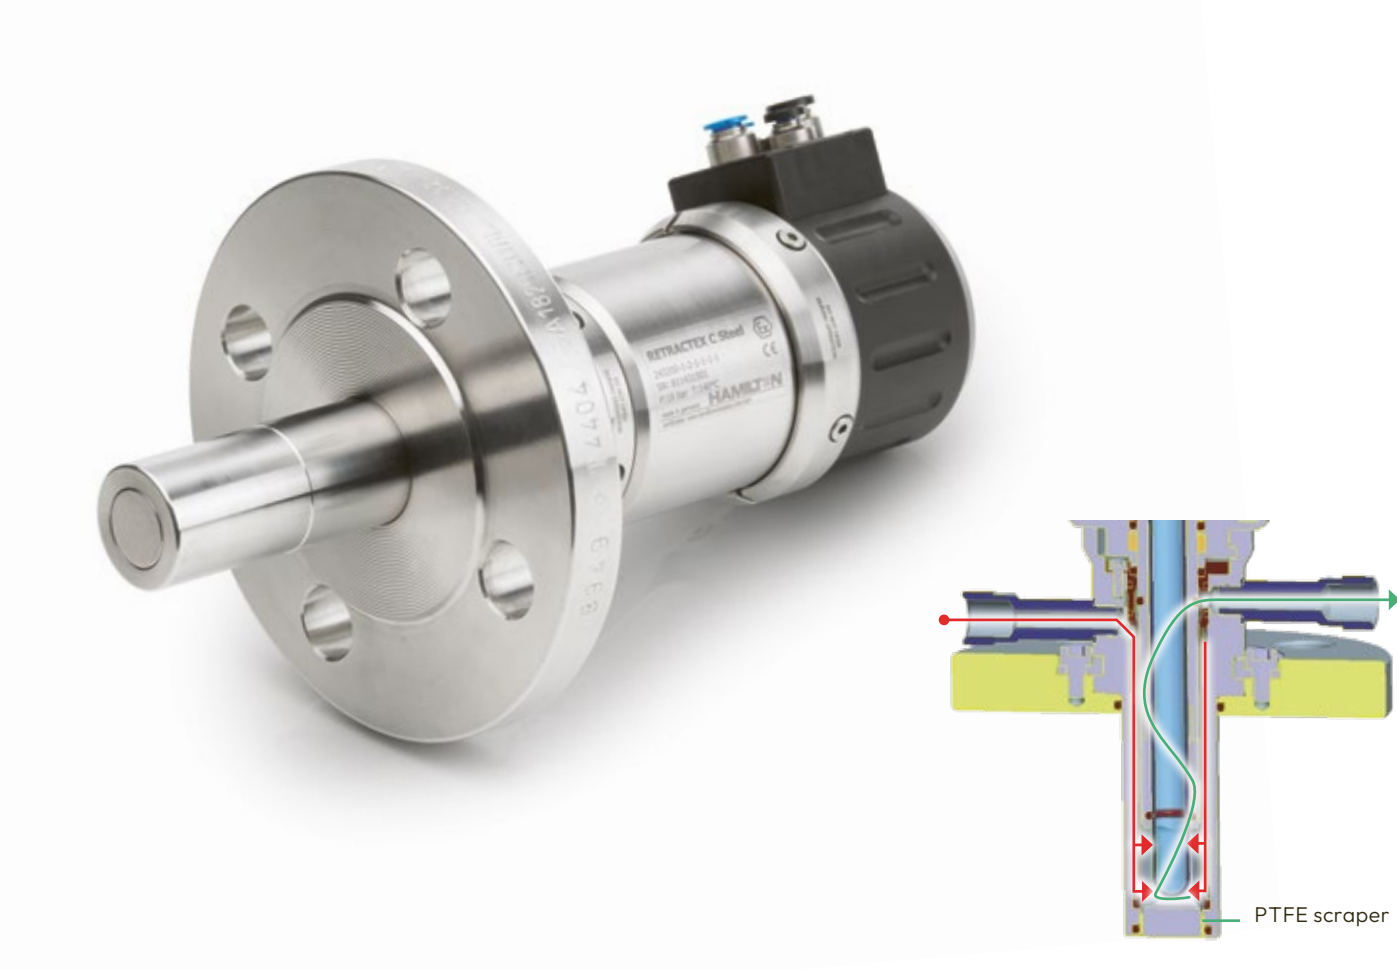

The retractable pneumatic or manual housing Retractex C was designed for applications in the chemical industry. The compact design with a stroke of only 36 mm keeps wear on seals to a minimum and creates to excellent reliability – day and night, all year long. It can be cleaned easily and thoroughly in place. It is designed for 12 mm sensors and is equipped with several safety features (e.g. no sensor – no insertion, window to check seals for leakage etc.) to provide operator safety. It is available with various process connections that can be used with all vessels used in this branch.

**Cleaning of the Retractex C?**  
In cleaning position, the sensor can be cleaned while the process is running. The advantage of the insertion tube is the short way for insertion. A PTFE scraper with o-ring guarantees that dirt stays outside of the housing and does not harm the o-ring.

### Benefits

- Extremely compact design
- Integrated safety concept- no sensor – no insertion
- Very low maintenance
- Easy installation of the pneumatic housing with color coded connectors

| Specifications                       |   |
|--------------------------------------|---|
| Wetted parts                         | Stainless Steel 1.4404 or 2.4602          |
| O-ring material                      | EPDM or FKM or FFKM                       |
| Pressure range (relative to ambient) | 0 to 16 bar g (120 °C), 10 bar g (140 °C) |
| Temperature range                    | -10 to 140 °C                             |
| Sensor a-length                      | 225 mm                                    |
| Surface finish                       | R <sub>a</sub> < 0.8 µm (N6)              |

For more specifications see [www.hamiltoncompany.com](http://www.hamiltoncompany.com)

| Ordering Information |  |
|----------------------|--|
| 243200               | Retractex C Steel (pneumatic)                          |
| 243255               | Retractex C Steel M (manual)                           |
| Code                 | Material (wetted parts)                                |
| 1                    | Stainless Steel 1.4404 (material certificate included) |
| 2                    | Stainless Steel 2.4602 (material certificate included) |
| 0                    | Special Design   |
| Code                 | Sealing Material (wetted sealings)                     |
| 1                    | EPDM / USP VI (elastomer certificate included)         |
| 2                    | FKM (Viton)  |
| 3                    | FFKM (Kalrez)  |
| 0                    | Special Design   |
| Code                 | Sensor   |
| 1                    | 225 mm PG13,5  |
| 0                    | Special Design   |
| Code                 | Process Connection                                     |
| 1                    | Flange DN32 PN16                                       |
| 2                    | Flange DN40 PN16                                       |
| 3                    | Flange DN50 PN16                                       |
| 4                    | Flange ANSI 1¼" 150lbs                                 |
| 5                    | Flange ANSI 1½" 150lbs                                 |
| 6                    | Flange ANSI 2" 150lbs                                  |
| 7                    | NPT M 1¼"  |
| 8                    | Tri Clamp 2" (OD Ø 64 mm)                              |
| 9                    | Tri Clamp 1.5" (OD Ø 50.5 mm)                          |
| 0                    | Special Design   |
| Code                 | Cleaning Connection                                    |
| 1                    | G ½" thread (internal)                                 |
| 2                    | G ¾" thread (internal)                                 |
| 3                    | ¾" NPT (internal)                                      |
| 0                    | Special Design   |
| Code                 | Position switch  |
| 1                    | Pneumatic  |
| 2                    | Electrical (Namur)                                     |
| 0                    | Special Design   |
| 2432XX -             |  |

### Accessories

 **Matching Tools & Sensor Dummies**  
→ [163](#)

Service Kit Retractex C  
EPDM  
[REF 243201](#)

Service Kit Retractex C  
FKM (Viton)  
[REF 243202](#)

Service Kit Retractex C  
FFKM (Kalrez)  
[REF 243203](#)


Service tool PG13.5 for  
retractable housing  
[REF 242231](#)

Unlocking device  
for insertion rod  
Retractex M  
[REF 243261](#)

Set blind plug G 1/8"  
1.4301 for cleaning  
chamber  
[REF 243206](#)



# Retractex C Plastic

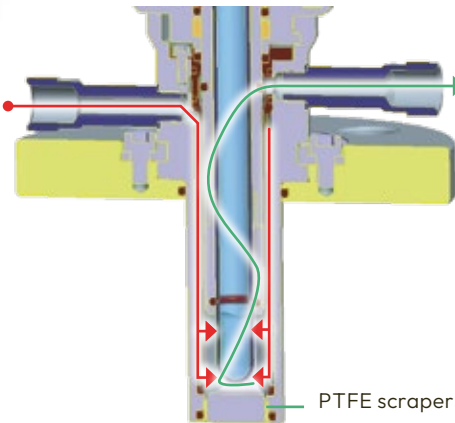

The retractable pneumatic or manual housing Retractex C was designed for applications in the chemical industry. The compact design with a stroke of only 36 mm keeps wear on seals to a minimum and creates excellent reliability – day and night, all year long. It can be cleaned easily and thoroughly in place. It is designed for 12 mm sensors and is equipped with several safety features (e.g. no sensor – no insertion, window to check seals for leakage etc.) to provide operator safety. It is available with various process connections that can be used with all vessels used in this branch.

### Cleaning of the Retractex C?

In cleaning position, the sensor can be cleaned while the process is running. The advantage of the insertion tube is the short way for insertion. A PTFE scraper with o-ring guarantees that dirt stays outside of the housing and does not harm the o-ring.

### Benefits

- Extremely compact design
- Integrated safety concept- no sensor – no insertion
- Very low maintenance
- Easy installation of the pneumatic housing with color coded connectors
- Choice of 3 different plastics

| Specifications                       |   |
|--------------------------------------|---|
| Wetted parts                         | PVDF or PEEK or PP                        |
| O-ring material                      | EPDM or FKM or FFKM                       |
| Pressure range (relative to ambient) | 0 to 16 bar g (120 °C), 10 bar g (140 °C) |
| Temperature range                    | -10 to 140 °C                             |
| Sensor a-length                      | 225 mm                                    |
| Surface finish                       | R <sub>a</sub> < 0.8 µm (N6)              |

For more specifications see [www.hamiltoncompany.com](http://www.hamiltoncompany.com)

| Ordering Information |  |
|----------------------|--|
| 243220               | Retractex C Plastic (pneumatic)                    |
| 243265               | Retractex C Plastic M (manual)                     |
| Code                 | Material (wetted parts)                            |
| 1                    | PP   |
| 2                    | PVDF / 2.4602                                      |
| 3                    | PEEK (FDA approval certificate included)           |
| 0                    | Special Design                                     |
| Code                 | Sealing Material (wetted sealings)                 |
| 1                    | EPDM / FDA USP VI (elastomer certificate included) |
| 2                    | FKM (Viton)  |
| 3                    | FFKM (Kalrez)                                      |
| 0                    | Special Design                                     |
| Code                 | Sensor   |
| 1                    | 225 mm PG13,5                                      |
| 0                    | Special Design                                     |
| Code                 | Process Connection                                 |
| 1                    | Flange DN50 PN16                                   |
| 2                    | Flange ANSI 2" 150lbs                              |
| 3                    | NPT M 1¼"  |
| 0                    | Special Design                                     |
| Code                 | Cleaning Connection                                |
| 1                    | G ½" thread (internal)                             |
| 2                    | G ¾" thread (internal)                             |
| 3                    | ¼" NPT (internal)                                  |
| 0                    | Special Design                                     |
| Code                 | Position switch                                    |
| 1                    | Pneumatic  |
| 2                    | Electrical (Nemur)                                 |
| 0                    | Special Design                                     |
| 2432XX -             |  |

### Accessories

 Matching Tools & Sensor Dummies  
→ [163](#)

Service Kit Retractex C EPDM  
[REF 243201](#)

Service Kit Retractex C FKM (Viton)  
[REF 243202](#)

Service Kit Retractex C FFKM (Kalrez)  
[REF 243203](#)

Service tool PG13.5 for retractable housing  
[REF 242231](#)

Unlocking device for insertion rod Retractex M  
[REF 243261](#)

Set blind plug G ½" PVDF for cleaning chamber  
[REF 243224](#)


Set blind plug G ½" PP for cleaning chamber  
[REF 237746](#)

Set blind plug G ½" PEEK for cleaning chamber  
[REF 237747](#)





# Retractex C Steel LT

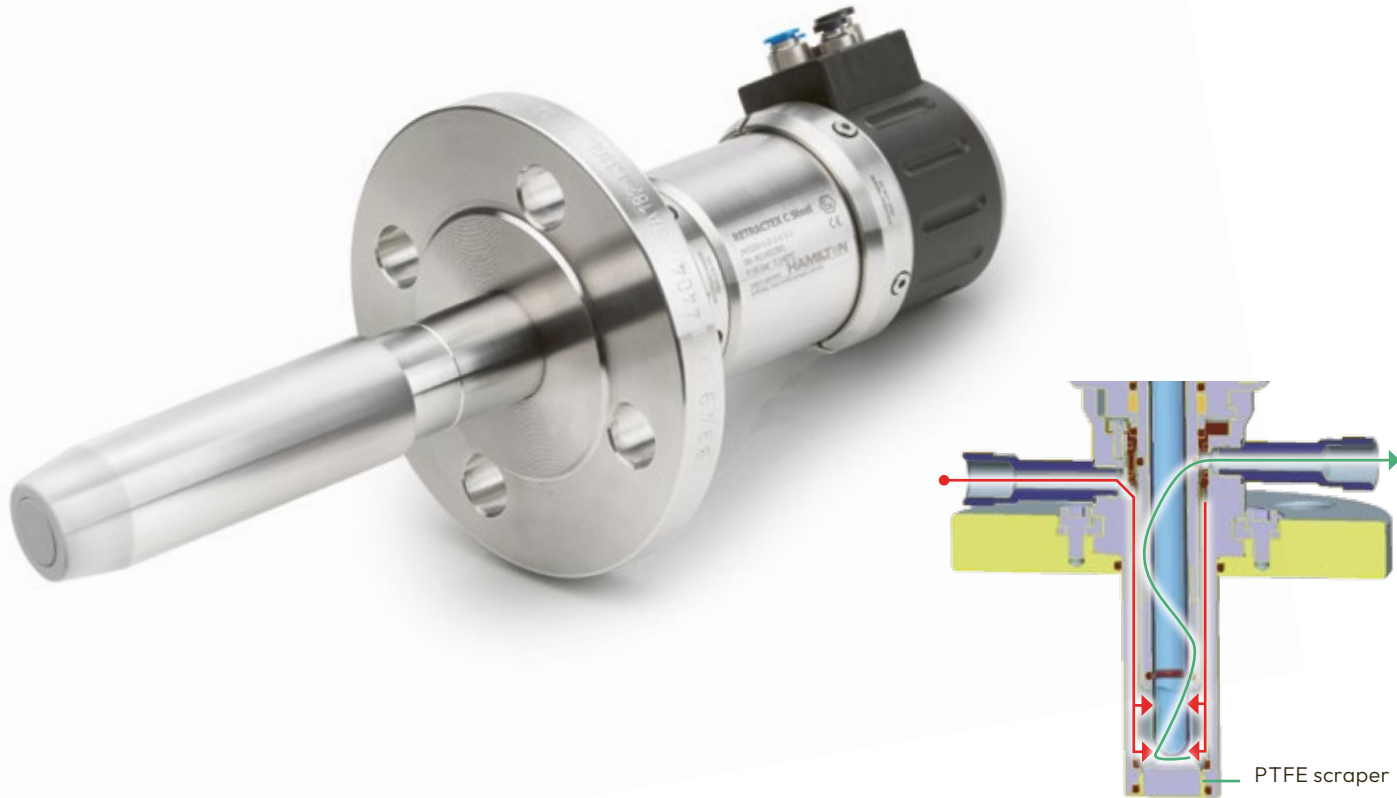

The retractable pneumatic or manual housing Retractex C was designed for applications in the chemical industry. The compact design with a stroke of only 36 mm with an insertion depth up to 207 mm keeps wear on seals to a minimum and creates excellent reliability – day and night, all year long. It can be cleaned easily and thoroughly in place. It is designed for 12 mm sensors and is equipped with several safety features (e.g. no sensor – no insertion, window to check seals for leakage etc.) to provide operator safety. It is available with various process connections that can be used with all vessels used in this branch.

**Cleaning of the Retractex C?**  
In cleaning position, the sensor can be cleaned while the process is running. The advantage of the insertion tube is the short way for insertion. A PTFE scraper with o-ring guarantees that dirt stays outside of the housing and does not harm the o-ring.

### Benefits

- Extremely compact design (only 36 mm trave of inertion tube with an insertion depth of 207 mm)
- Integrated safety concept- no sensor – no insertion
- Very low maintenance
- Easy installation of the pneumatic housing with color coded connectors

| Specifications                       |   |
|--------------------------------------|---|
| Wetted parts                         | Stainless steel 1.4404 or 2.4602          |
| O-ring material                      | EPDM or FKM or FFKM                       |
| Pressure range (relative to ambient) | 0 to 16 bar g (120 °C), 10 bar g (140 °C) |
| Temperature range                    | -10 to 140 °C                             |
| Sensor a-length                      | 325 mm                                    |
| Surface finish                       | R <sub>a</sub> < 0.8 µm (N6)              |

For more specifications see [www.hamiltoncompany.com](http://www.hamiltoncompany.com)

| Ordering Information |   |      |                         |   |  |   |  |   |                |      |                                    |   |  |   |     |   |      |   |                |      |        |   |               |   |                |      |                    |   |             |   |             |   |                 |   |                |   |                |      |                     |   |                          |   |                          |   |                     |   |                |      |                 |   |           |   |                    |   |                |
|----------------------|---|------|-------------------------|---|--|---|--|---|----------------|------|------------------------------------|---|--|---|-----|---|------|---|----------------|------|--------|---|---------------|---|----------------|------|--------------------|---|-------------|---|-------------|---|-----------------|---|----------------|---|----------------|------|---------------------|---|--------------------------|---|--------------------------|---|---------------------|---|----------------|------|-----------------|---|-----------|---|--------------------|---|----------------|
| 243210               | Retractex C Steel LT (pneumatic)  |      |                         |   |  |   |  |   |                |      |                                    |   |  |   |     |   |      |   |                |      |        |   |               |   |                |      |                    |   |             |   |             |   |                 |   |                |   |                |      |                     |   |                          |   |                          |   |                     |   |                |      |                 |   |           |   |                    |   |                |
| 243260               | Retractex C Steel LT M (manual)   |      |                         |   |  |   |  |   |                |      |                                    |   |  |   |     |   |      |   |                |      |        |   |               |   |                |      |                    |   |             |   |             |   |                 |   |                |   |                |      |                     |   |                          |   |                          |   |                     |   |                |      |                 |   |           |   |                    |   |                |
| 2432XX -             | <table><tr><th>Code</th><th>Material (wetted parts)</th></tr><tr><td>1</td><td>Stainless Steel 1.4404 (material certificate included)</td></tr><tr><td>2</td><td>Stainless Steel 2.4602 C22 (material certificate included)</td></tr><tr><td>0</td><td>Special Design</td></tr><tr><th>Code</th><th>Sealing Material (wetted sealings)</th></tr><tr><td>1</td><td>EPDM / FDA USP VI (elastomer certificate included)</td></tr><tr><td>2</td><td>FKM</td></tr><tr><td>3</td><td>FFKM</td></tr><tr><td>0</td><td>Special Design</td></tr><tr><th>Code</th><th>Sensor</th></tr><tr><td>1</td><td>325 mm PG13,5</td></tr><tr><td>0</td><td>Special Design</td></tr><tr><th>Code</th><th>Process Connection</th></tr><tr><td>1</td><td>Flange DN40</td></tr><tr><td>2</td><td>Flange DN50</td></tr><tr><td>3</td><td>Flange ANSI 1½"</td></tr><tr><td>4</td><td>Flange ANSI 2"</td></tr><tr><td>0</td><td>Special Design</td></tr><tr><th>Code</th><th>Cleaning Connection</th></tr><tr><td>1</td><td>G 1/8" thread (internal)</td></tr><tr><td>2</td><td>G 1/4" thread (internal)</td></tr><tr><td>3</td><td>1/4" NPT (internal)</td></tr><tr><td>0</td><td>Special Design</td></tr><tr><th>Code</th><th>Position switch</th></tr><tr><td>1</td><td>Pneumatic</td></tr><tr><td>2</td><td>Electrical (Namur)</td></tr><tr><td>0</td><td>Special Design</td></tr></table> | Code | Material (wetted parts) | 1 | Stainless Steel 1.4404 (material certificate included) | 2 | Stainless Steel 2.4602 C22 (material certificate included) | 0 | Special Design | Code | Sealing Material (wetted sealings) | 1 | EPDM / FDA USP VI (elastomer certificate included) | 2 | FKM | 3 | FFKM | 0 | Special Design | Code | Sensor | 1 | 325 mm PG13,5 | 0 | Special Design | Code | Process Connection | 1 | Flange DN40 | 2 | Flange DN50 | 3 | Flange ANSI 1½" | 4 | Flange ANSI 2" | 0 | Special Design | Code | Cleaning Connection | 1 | G 1/8" thread (internal) | 2 | G 1/4" thread (internal) | 3 | 1/4" NPT (internal) | 0 | Special Design | Code | Position switch | 1 | Pneumatic | 2 | Electrical (Namur) | 0 | Special Design |
| Code                 | Material (wetted parts)   |      |                         |   |  |   |  |   |                |      |                                    |   |  |   |     |   |      |   |                |      |        |   |               |   |                |      |                    |   |             |   |             |   |                 |   |                |   |                |      |                     |   |                          |   |                          |   |                     |   |                |      |                 |   |           |   |                    |   |                |
| 1                    | Stainless Steel 1.4404 (material certificate included)  |      |                         |   |  |   |  |   |                |      |                                    |   |  |   |     |   |      |   |                |      |        |   |               |   |                |      |                    |   |             |   |             |   |                 |   |                |   |                |      |                     |   |                          |   |                          |   |                     |   |                |      |                 |   |           |   |                    |   |                |
| 2                    | Stainless Steel 2.4602 C22 (material certificate included)  |      |                         |   |  |   |  |   |                |      |                                    |   |  |   |     |   |      |   |                |      |        |   |               |   |                |      |                    |   |             |   |             |   |                 |   |                |   |                |      |                     |   |                          |   |                          |   |                     |   |                |      |                 |   |           |   |                    |   |                |
| 0                    | Special Design  |      |                         |   |  |   |  |   |                |      |                                    |   |  |   |     |   |      |   |                |      |        |   |               |   |                |      |                    |   |             |   |             |   |                 |   |                |   |                |      |                     |   |                          |   |                          |   |                     |   |                |      |                 |   |           |   |                    |   |                |
| Code                 | Sealing Material (wetted sealings)  |      |                         |   |  |   |  |   |                |      |                                    |   |  |   |     |   |      |   |                |      |        |   |               |   |                |      |                    |   |             |   |             |   |                 |   |                |   |                |      |                     |   |                          |   |                          |   |                     |   |                |      |                 |   |           |   |                    |   |                |
| 1                    | EPDM / FDA USP VI (elastomer certificate included)  |      |                         |   |  |   |  |   |                |      |                                    |   |  |   |     |   |      |   |                |      |        |   |               |   |                |      |                    |   |             |   |             |   |                 |   |                |   |                |      |                     |   |                          |   |                          |   |                     |   |                |      |                 |   |           |   |                    |   |                |
| 2                    | FKM   |      |                         |   |  |   |  |   |                |      |                                    |   |  |   |     |   |      |   |                |      |        |   |               |   |                |      |                    |   |             |   |             |   |                 |   |                |   |                |      |                     |   |                          |   |                          |   |                     |   |                |      |                 |   |           |   |                    |   |                |
| 3                    | FFKM  |      |                         |   |  |   |  |   |                |      |                                    |   |  |   |     |   |      |   |                |      |        |   |               |   |                |      |                    |   |             |   |             |   |                 |   |                |   |                |      |                     |   |                          |   |                          |   |                     |   |                |      |                 |   |           |   |                    |   |                |
| 0                    | Special Design  |      |                         |   |  |   |  |   |                |      |                                    |   |  |   |     |   |      |   |                |      |        |   |               |   |                |      |                    |   |             |   |             |   |                 |   |                |   |                |      |                     |   |                          |   |                          |   |                     |   |                |      |                 |   |           |   |                    |   |                |
| Code                 | Sensor  |      |                         |   |  |   |  |   |                |      |                                    |   |  |   |     |   |      |   |                |      |        |   |               |   |                |      |                    |   |             |   |             |   |                 |   |                |   |                |      |                     |   |                          |   |                          |   |                     |   |                |      |                 |   |           |   |                    |   |                |
| 1                    | 325 mm PG13,5   |      |                         |   |  |   |  |   |                |      |                                    |   |  |   |     |   |      |   |                |      |        |   |               |   |                |      |                    |   |             |   |             |   |                 |   |                |   |                |      |                     |   |                          |   |                          |   |                     |   |                |      |                 |   |           |   |                    |   |                |
| 0                    | Special Design  |      |                         |   |  |   |  |   |                |      |                                    |   |  |   |     |   |      |   |                |      |        |   |               |   |                |      |                    |   |             |   |             |   |                 |   |                |   |                |      |                     |   |                          |   |                          |   |                     |   |                |      |                 |   |           |   |                    |   |                |
| Code                 | Process Connection  |      |                         |   |  |   |  |   |                |      |                                    |   |  |   |     |   |      |   |                |      |        |   |               |   |                |      |                    |   |             |   |             |   |                 |   |                |   |                |      |                     |   |                          |   |                          |   |                     |   |                |      |                 |   |           |   |                    |   |                |
| 1                    | Flange DN40   |      |                         |   |  |   |  |   |                |      |                                    |   |  |   |     |   |      |   |                |      |        |   |               |   |                |      |                    |   |             |   |             |   |                 |   |                |   |                |      |                     |   |                          |   |                          |   |                     |   |                |      |                 |   |           |   |                    |   |                |
| 2                    | Flange DN50   |      |                         |   |  |   |  |   |                |      |                                    |   |  |   |     |   |      |   |                |      |        |   |               |   |                |      |                    |   |             |   |             |   |                 |   |                |   |                |      |                     |   |                          |   |                          |   |                     |   |                |      |                 |   |           |   |                    |   |                |
| 3                    | Flange ANSI 1½"   |      |                         |   |  |   |  |   |                |      |                                    |   |  |   |     |   |      |   |                |      |        |   |               |   |                |      |                    |   |             |   |             |   |                 |   |                |   |                |      |                     |   |                          |   |                          |   |                     |   |                |      |                 |   |           |   |                    |   |                |
| 4                    | Flange ANSI 2"  |      |                         |   |  |   |  |   |                |      |                                    |   |  |   |     |   |      |   |                |      |        |   |               |   |                |      |                    |   |             |   |             |   |                 |   |                |   |                |      |                     |   |                          |   |                          |   |                     |   |                |      |                 |   |           |   |                    |   |                |
| 0                    | Special Design  |      |                         |   |  |   |  |   |                |      |                                    |   |  |   |     |   |      |   |                |      |        |   |               |   |                |      |                    |   |             |   |             |   |                 |   |                |   |                |      |                     |   |                          |   |                          |   |                     |   |                |      |                 |   |           |   |                    |   |                |
| Code                 | Cleaning Connection   |      |                         |   |  |   |  |   |                |      |                                    |   |  |   |     |   |      |   |                |      |        |   |               |   |                |      |                    |   |             |   |             |   |                 |   |                |   |                |      |                     |   |                          |   |                          |   |                     |   |                |      |                 |   |           |   |                    |   |                |
| 1                    | G 1/8" thread (internal)  |      |                         |   |  |   |  |   |                |      |                                    |   |  |   |     |   |      |   |                |      |        |   |               |   |                |      |                    |   |             |   |             |   |                 |   |                |   |                |      |                     |   |                          |   |                          |   |                     |   |                |      |                 |   |           |   |                    |   |                |
| 2                    | G 1/4" thread (internal)  |      |                         |   |  |   |  |   |                |      |                                    |   |  |   |     |   |      |   |                |      |        |   |               |   |                |      |                    |   |             |   |             |   |                 |   |                |   |                |      |                     |   |                          |   |                          |   |                     |   |                |      |                 |   |           |   |                    |   |                |
| 3                    | 1/4" NPT (internal)   |      |                         |   |  |   |  |   |                |      |                                    |   |  |   |     |   |      |   |                |      |        |   |               |   |                |      |                    |   |             |   |             |   |                 |   |                |   |                |      |                     |   |                          |   |                          |   |                     |   |                |      |                 |   |           |   |                    |   |                |
| 0                    | Special Design  |      |                         |   |  |   |  |   |                |      |                                    |   |  |   |     |   |      |   |                |      |        |   |               |   |                |      |                    |   |             |   |             |   |                 |   |                |   |                |      |                     |   |                          |   |                          |   |                     |   |                |      |                 |   |           |   |                    |   |                |
| Code                 | Position switch   |      |                         |   |  |   |  |   |                |      |                                    |   |  |   |     |   |      |   |                |      |        |   |               |   |                |      |                    |   |             |   |             |   |                 |   |                |   |                |      |                     |   |                          |   |                          |   |                     |   |                |      |                 |   |           |   |                    |   |                |
| 1                    | Pneumatic   |      |                         |   |  |   |  |   |                |      |                                    |   |  |   |     |   |      |   |                |      |        |   |               |   |                |      |                    |   |             |   |             |   |                 |   |                |   |                |      |                     |   |                          |   |                          |   |                     |   |                |      |                 |   |           |   |                    |   |                |
| 2                    | Electrical (Namur)  |      |                         |   |  |   |  |   |                |      |                                    |   |  |   |     |   |      |   |                |      |        |   |               |   |                |      |                    |   |             |   |             |   |                 |   |                |   |                |      |                     |   |                          |   |                          |   |                     |   |                |      |                 |   |           |   |                    |   |                |
| 0                    | Special Design  |      |                         |   |  |   |  |   |                |      |                                    |   |  |   |     |   |      |   |                |      |        |   |               |   |                |      |                    |   |             |   |             |   |                 |   |                |   |                |      |                     |   |                          |   |                          |   |                     |   |                |      |                 |   |           |   |                    |   |                |

### Accessories

Matching Tools & Sensor Dummies  
→ [163](#)

Service Kit Retractex C LT EPDM  
[REF 243211](#)

Service Kit Retractex C LT FKM (Viton)  
[REF 243212](#)

Service Kit Retractex C LT FFKM (Kalrez)  
[REF 243213](#)


Service tool PG13.5 for retractable housing  
[REF 242231](#)

Unlocking device for insertion rod Retractex M  
[REF 243261](#)

Set blind plug G1/8" 1.4301 for cleaning chamber  
[REF 243206](#)



# Retractex C Plastic LT

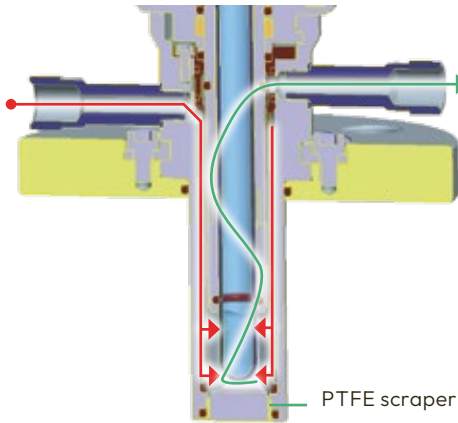

The retractable pneumatic or manual housing Retractex C was designed for applications in the chemical industry. The compact design with a stroke of only 36 mm with an insertion depth up to 207 mm keeps wear on seals to a minimum and creates excellent reliability – day and night, all year long. It can be cleaned easily and thoroughly in place. It is designed for 12 mm sensors and is equipped with several safety features (e.g. no sensor – no insertion, window to check seals for leakage etc.) to provide operator safety. It is available with various process connections that can be used with all vessels used in this branch.

**Cleaning of the Retractex C?**  
In cleaning position, the sensor can be cleaned while the process is running. The advantage of the insertion tube is the short way for insertion. A PTFE scraper with o-ring guarantees that dirt stays outside of the housing and does not harm the o-ring.

### Benefits

- Extremely compact design (only 36 mm travel of insertion tube with an insertion depth of 207 mm)
- Integrated safety concept- no sensor – no insertion
- Very low maintenance
- Easy installation of the pneumatic housing with color coded connectors

| Specifications                       |   |
|--------------------------------------|---|
| Wetted parts                         | PVDF or PEEK                              |
| O-ring material                      | EPDM or FKM or FFKM                       |
| Pressure range (relative to ambient) | 0 to 16 bar g (120 °C), 10 bar g (140 °C) |
| Temperature range                    | -10 to 140 °C                             |
| Sensor a-length                      | 325 mm                                    |
| Surface finish                       | R <sub>a</sub> < 0.8 µm (N6)              |

For more specifications see [www.hamiltoncompany.com](http://www.hamiltoncompany.com)

| Ordering Information |                                    |                         |  |  |  |
|----------------------|------------------------------------|-------------------------|--|--|--|
| 243230               | Retractex C Plastic LT (pneumatic) |                         |  |  |  |
| 243270               | Retractex C Plastic LT M (manual)  |                         |  |  |  |
| Code                 |                                    | Material (wetted parts) |  |  |  |
| 1                    |                                    | PVDF / 2.4602           |  |  |  |
| 2                    |                                    | PEEK                    |  |  |  |
| 0                    |                                    | Special Design          |  |  |  |
|                      |                                    | Code                    |  | Sealing Material (wetted sealings)                 |  |
|                      |                                    | 1                       |  | EPDM / FDA USP VI (elastomer certificate included) |  |
|                      |                                    | 2                       |  | FKM (Viton)  |  |
|                      |                                    | 3                       |  | FFKM (Kalrez)                                      |  |
|                      |                                    | 0                       |  | Special Design                                     |  |
|                      |                                    | Code                    |  | Sensor   |  |
|                      |                                    | 1                       |  | 325 mm PG13,5                                      |  |
|                      |                                    | 0                       |  | Special Design                                     |  |
|                      |                                    | Code                    |  | Process Connection                                 |  |
|                      |                                    | 1                       |  | Flange DN50  |  |
|                      |                                    | 2                       |  | Flange ANSI 2"                                     |  |
|                      |                                    | 0                       |  | Special Design                                     |  |
|                      |                                    | Code                    |  | Cleaning Connection                                |  |
|                      |                                    | 1                       |  | G 1/8" thread (internal)                           |  |
|                      |                                    | 2                       |  | G 1/4" thread (internal)                           |  |
|                      |                                    | 0                       |  | Special Design                                     |  |
|                      |                                    | Code                    |  | Position switch                                    |  |
|                      |                                    | 1                       |  | Pneumatic  |  |
|                      |                                    | 2                       |  | Electrical (Nemur)                                 |  |
|                      |                                    | 0                       |  | Special Design                                     |  |
| 2432XX –             |                                    |                         |  |  |  |

### Accessories

 Matching Tools & Sensor Dummies  
→ [163](#)

Service Kit Retractex C LT EPDM  
[REF 243211](#)

Service Kit Retractex C LT FKM (Viton)  
[REF 243212](#)

Service Kit Retractex C LT FFKM (Kalrez)  
[REF 243213](#)

Service tool PG13.5 for retractable housing  
[REF 242231](#)

Unlocking device for insertion rod Retractex M  
[REF 243261](#)

Set blind plug G 1/8" PVDF for cleaning chamber  
[REF 243224](#)

# MasterFit



The MasterFit is a housing for pressurizable pH sensors like the ChemoTrode types. The pressurization ensures a constant outflow of electrolyte. This helps to prevent clogging of the diaphragm and poisoning of the electrolyte. The MasterFit can be used in a huge variety of applications mainly in the chemical industry.

The pressure inside the MasterFit can be controlled via a built-in manometer. Furthermore the liquid level of the electrode can be controlled through the coated glass body of the housing at any time.

## Benefits


- Sealing feature prevents loss of pressure caused by soiling
- Pressure reduction on disassembly
- Various o-ring positions available
- Easy maintenance

| Specifications                       |                              |
|--------------------------------------|------------------------------|
| Wetted parts                         | Stainless Steel 1.4435       |
| O-ring material                      | EPDM                         |
| O-ring position                      | 22 to 55 mm                  |
| Pressure range (relative to ambient) | 0 to 6 bar g                 |
| Temperature range                    | -10 to 130 °C                |
| Sensor a-length                      | 120, 150, 200 mm             |
| Surface finish                       | R <sub>a</sub> < 0.8 µm (N6) |

For more specifications see [www.hamiltoncompany.com](http://www.hamiltoncompany.com)

| Type          | A (housing insertion depth) | B (total length) |
|---------------|-----------------------------|------------------|
| MasterFit 120 | 40 mm                       | 475 mm           |
| MasterFit 150 | 70 mm                       | 505 mm           |
| MasterFit 250 | 170 mm                      | 605 mm           |

## Dimensional drawings / MasterFit 120 (all dimensions in mm)

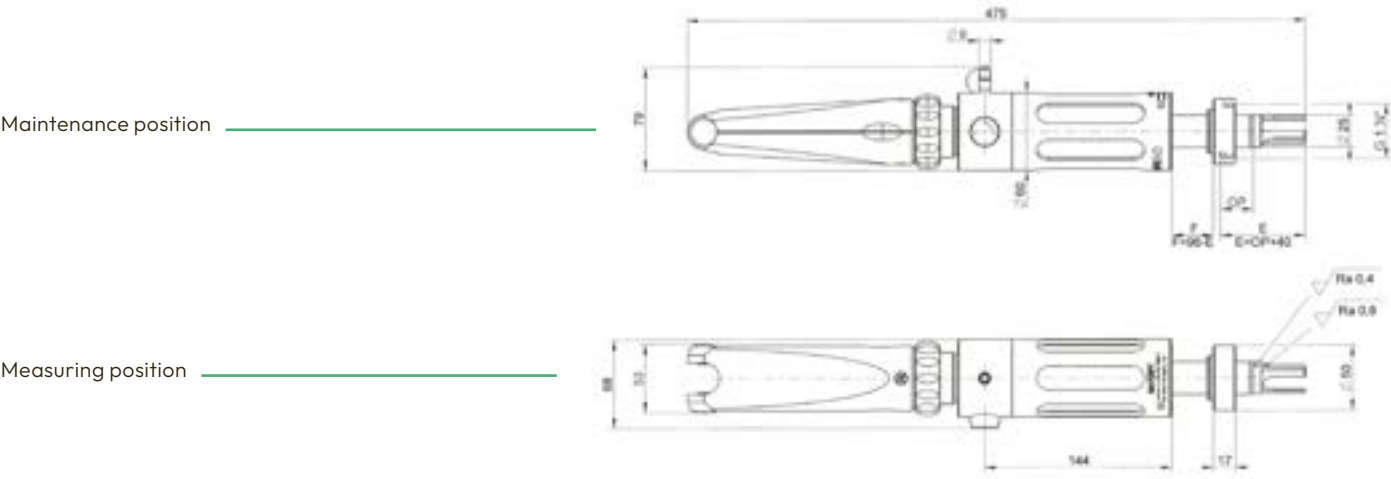

| Ordering Information |                    |           |
|----------------------|--------------------|-----------|
| Type                 | Process Connection | REF       |
| MasterFit 120        | G 1¼               | 237200-OP |
| MasterFit 150        | G 1¼               | 237225-OP |
| MasterFit 250        | G 1¼               | 237245-30 |

## Accessories

- Safety Socket → [128](#)
- Matching Tools & Sensor Dummies → [163](#)

Pressure Adapter  
[REF 237252](#)

Service Kit for MasterFit  
[REF 237229](#)

Service Kit for MasterFit FFKM  
[REF 237319](#)

Flange Adapter for MasterFit\*  
[REF 237910](#)

\*The Flange Adapter is used with a MasterFit 120 and a sensor with a shaft length of 150 mm

# Hamilton FlowCells

## Where Innovation Flows Seamless



No two processes are identical, and neither are your measurement needs. With the Hamilton FlowCells, you gain unparalleled versatility. Whether it's pH, conductivity, dissolved oxygen, or any of our compatible sensors listed in Table 1, this ingenious housing allows you to select different positions and tubes, ensuring optimal performance tailored to your unique requirements. Crafted with the highest quality materials, the internal part of the FlowCell is expertly fashioned from PEEK, guaranteeing durability and resistance to demanding industrial conditions.


Immerse yourself in real-time insights as you monitor processes directly within the process line or through a bypass, ensuring accurate data collection and informed decision-making.

### Benefits

- Flexible design for one or two measuring points
- PEEK insert of high chemical resistance
- Low dead volume
- Self draining
- Internal aseptic clamp pipe connection

| Specifications     |   |
|--------------------|---|
| Process connection | Triclamp or Swagelok  |
| Wetted parts       | PEEK, Stainless Steel 1.4435  |
| Non wetted parts   | Stainless Steel 1.4435  |
| Standard seals     | EPDM (FDA approved)   |
| Temperature range  | -10 - 140 °C  |
| Maximum pressure   | 0 - 16 bar  |
| Internal volume    | REF 242585: approx. 8 mL (only within the Peek cell)<br>REF 242590: approx. 25 mL (only within the Peek cell) |

For more specifications see [www.hamiltoncompany.com](http://www.hamiltoncompany.com)

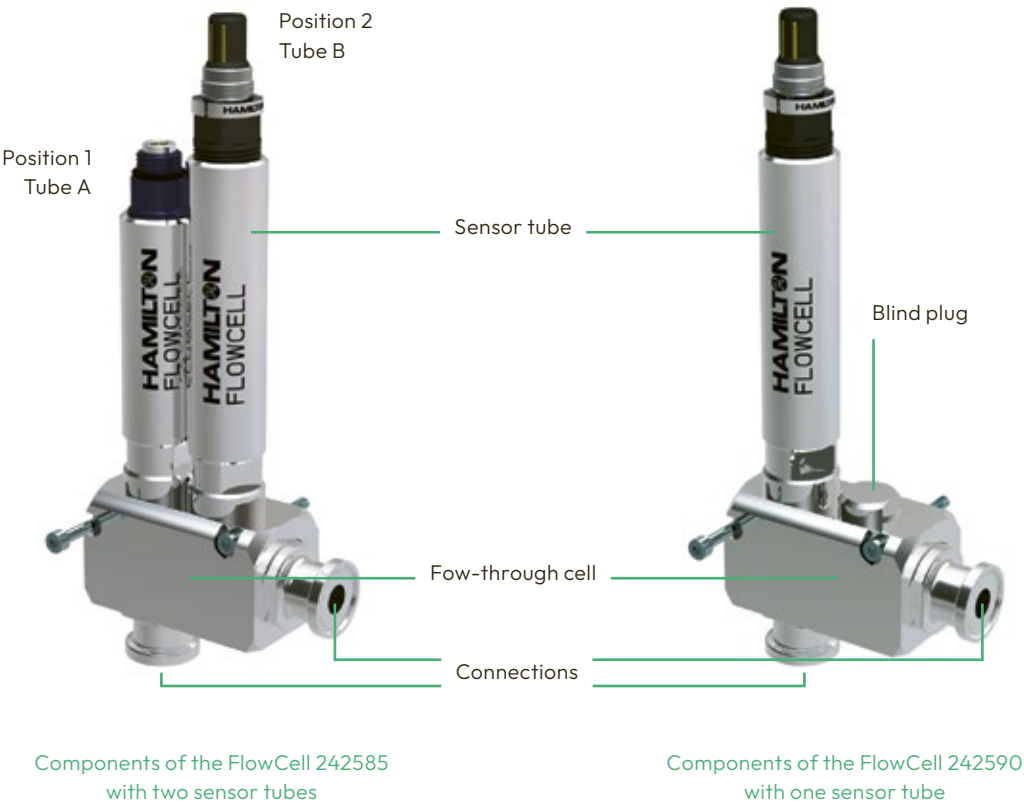

| Sensor compatibility |                        |
|----------------------|------------------------|
| Position 1           | Position 2             |
| pH / ORP Sensors     | Conducell 4UxF***      |
| Conducell UPW*       | OxyFerm / OxyGold      |
| Dencytee**           | VisiFerm / VisiFerm mA |
|                      | VisiTrace mA           |
|                      | CO <sub>2</sub> NTROL  |

Tube A and the fitting sensors can only be used in Position 1. Tube B and the fitting sensors can be used in both positions. Thus, either Tube A and/or B or twice the tube B are possible but not twice the tube A. If a single-sensor FlowCell is required, we always deliver it with position 1.

\*Conducell UPW is compatible only with the TC connection versions of the Flowcell (242585-xxx).

\*\*Dencytee Optical Cell Density sensor is only compatible with the larger Flowcell XL (242590-xxx).


\*\*\*All Conducell 4UxF should be calibrated within the flowcell for best accuracy. The Arc Conducell 4UxF is not compatible with the Flowcell (242585-xxx). It works best with the larger Flowcell XL (242590-xxx).



# FlowCell

Experience precision in a compact form with the small version of the FlowCell. Choose from TC25 and Swagelok connection options, each available in different versions. The ingeniously designed housing boasts a minimal internal volume of just 8ml, ensuring the utmost accuracy in measurements while optimizing valuable space.



| Ordering Information  |                |                                  |  |
|---|----------------|----------------------------------|--|
| 242585  | Flow Cell      |                                  |  |
|  | Code           | Measuring position               |  |
|   | 1              | only Tube A (short)              |  |
|   | 2              | only Tube B (long)               |  |
|   | 3              | Tube A (short) and Tube B (long) |  |
|   | 4              | 2 x Tube B (long)                |  |
|   | 0              | Special Design                   |  |
|   | Code           | Pipe Connection                  |  |
|   | 1              | TC25 ¼"                          |  |
|   | 2              | TC25 ⅜"                          |  |
|   | 3              | TC25 ½"                          |  |
|   | 4              | Swagelok 6 mm                    |  |
|   | 5              | Swagelok 10 mm *                 |  |
|   | 6              | Swagelok ¼"                      |  |
|   | 7              | Swagelok ⅜" *                    |  |
|   | 8              | Swagelok ½" *                    |  |
|   | 0              | Special Design                   |  |
|   | Code           | o-ring material                  |  |
|   | 1              | EPDM                             |  |
|   | 2              | FFKM (two measuring positions)   |  |
|   | 3              | FFKM (one measuring position)    |  |
| 0   | Special Design |                                  |  |
| 242585 –  |                |                                  |  |



### Accessories




 Matching Tools & Sensor Dummies  
→ 163

Service Kit FlowCell (EPDM)  
REF 237387

# FlowCell XL

Discover unparalleled performance in a spacious design with the FlowCell XL. This expanded version of the FlowCell features TC50 connectors in various configurations and a generous internal volume of 25ml. The housing is available in different sealing materials to meet every demand.



| Ordering Information  |   |   |                 |                                |  |
|---|---|---|-----------------|--------------------------------|--|
| 242590  | Flow Cell XL  |   |                 |                                |  |
|  | Code  | Measuring position  |                 |                                |  |
|   | 1   | only Tube A (short)   |                 |                                |  |
|   | 2   | only Tube B (long)  |                 |                                |  |
|   | 3   | Tube A (short) and Tube B (long)  |                 |                                |  |
|   | 4   | 2 x Tube B (long)   |                 |                                |  |
|   | 0   | Special Design  |                 |                                |  |
|   |  | Code  | Pipe Connection |                                |  |
|   |   | 1   | TC50 ¾"         |                                |  |
|   |   | 2   | TC50 1"         |                                |  |
|   |   | 3   | TC50 1.5" *     |                                |  |
|   |   | 0   | Special Design  |                                |  |
|   |   |  | Code            | o-ring material                |  |
|   |   |   | 1               | EPDM                           |  |
|   |   |   | 2               | FFKM (two measuring positions) |  |
|   |   |   | 3               | FFKM (one measuring position)  |  |
| 0   | Special Design  |   |                 |                                |  |
| 242590 –  |   |   |                 |                                |  |



### Accessories

 Matching Tools & Sensor Dummies  
→ 163

Service Kit FlowCell XL (EPDM)  
REF 237390



# FlexiFlow SL 10



The FlexiFlow is a flow-through cell. It can be used in all cases where pH or oxygen must be reliably measured in ion-weak media including coolant piping in power generating stations.

The sample is fed into the cell from the bottom at a low flow speed, and out of the cell again at the side. A groove cut into the FlexiFlow allows it to easily be attached anywhere with commercially available screws.

Not suitable for Conducell and Incyte Sensors.


### Benefits

- Compact design
- Easy to attach to a plate
- For use in small pipes where sensors cannot be inserted directly
- Self draining


| Specifications                       |                        |
|--------------------------------------|------------------------|
| Wetted parts                         | Stainless Steel 1.4435 |
| O-ring material                      | EPDM                   |
| Pressure range (relative to ambient) | 0 to 16 bar g          |
| Temperature range                    | -10 to 130 °C          |
| Sensor thread                        | PG 13.5                |
| Sensor a-length                      | 120 mm                 |
| Process connection                   | Swagelok 10 mm         |

For more specifications see [www.hamiltoncompany.com](http://www.hamiltoncompany.com)

### Sensor installation example

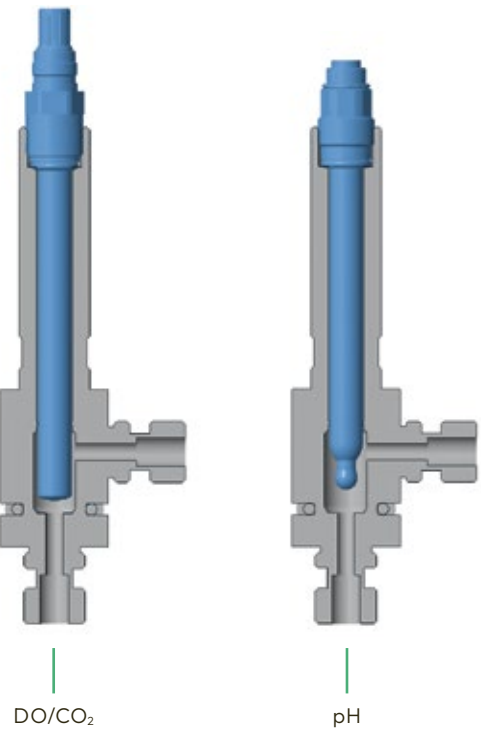

### Dimensional drawings (all dimensions in mm)

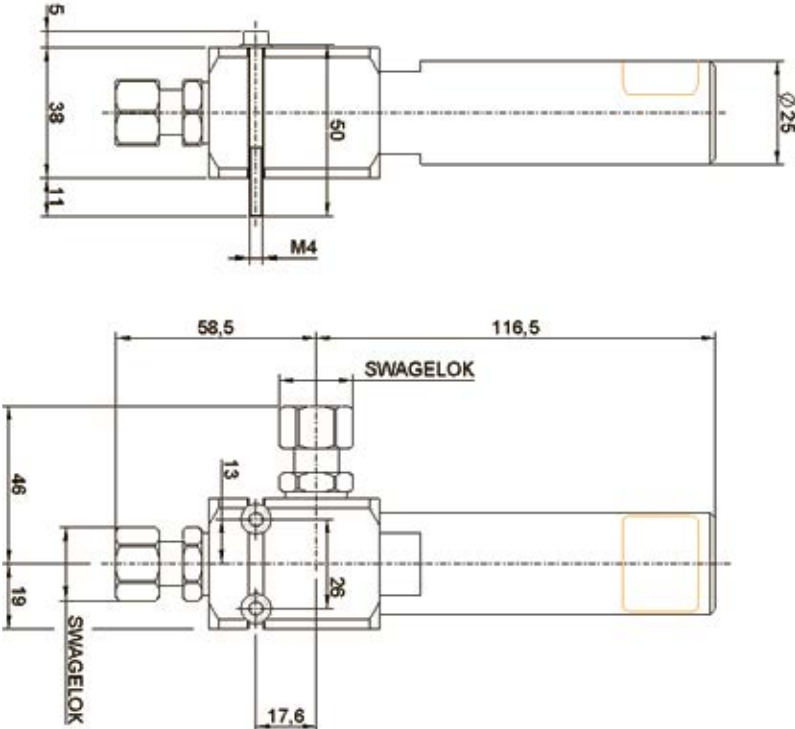

| Ordering Information |        |
|----------------------|--------|
| Type                 | REF    |
| FlexiFlow SL 10      | 237340 |

# Housing Service Kits, Parts and Tools

We offer a wide range of replacement and individual parts for all our products. Regular replacement ensures maximum reliability. Our consumables are neatly packaged in convenient sets enable the most hygienic and efficient management, storage and replacement of consumables. We also provide further parts and customized sets upon request. Choose us for all your replacement and tool needs!

## Tool for retractable housings

This simple and ingenious tool is on the one hand a hex kex (inbus) screwdriver and at the same time, thanks to a PG13.5 thread, it allows the operation of a retractable housing by simulating an installed sensor. An indispensable tool for training, installation and maintenance.



| Ordering Information          |        |
|-------------------------------|--------|
| Type                          | REF    |
| Tool for retractable housings | 242231 |

## Sensor Dummy

With the sensor dummies a sensor can be simulated, due to the same sealing properties and size as a sensor, and the specifications, the dummy is the ideal tool both for testing and training purposes but also the easiest way to replace a sensor during calibration, cleaning or replacement.

| Specifications     |   |
|--------------------|---|
| a-length           | 96 mm / 112 mm  |
| Process connection | PG 13.5   |
| Wetted parts       | Stainless Steel 1.4435, EPDM  |
| O-ring material    | FDA 21 CFR 177.2600, EG 1935/2004, USP <87>, USP <88> Class VI (121 °C) |



| Ordering Information |          |
|----------------------|----------|
| Type                 | REF      |
| Sensor Dummy 96 mm   | 242540   |
| Sensor Dummy 117 mm  | 242231   |
| Sensor Dummy 204 mm  | 10068190 |

## Immersion Set

The steel housing with hygienic surface and 3.1 material certificate serves as a weight to hang sensors freely suspended in the liquid to be measured. A simple and reliable installation of a sensor and at the same time extremely suitable for spot measurements.

| Specifications           |                                       |
|--------------------------|---------------------------------------|
| For sensors with         | 120 mm, 12 mm, PG 13.5                |
| Wetted parts             | Stainless Steel 1.4571, NBR           |
| Surface quality of steel | R <sub>a</sub> < 0.8 µm (N6)          |
| Certificate              | Yes, 3.1 certificate with heat number |



| Ordering Information |        |
|----------------------|--------|
| Type                 | REF    |
| Immersion Set        | 237158 |

# Field Services

## Ensure Effortless Integration with Your Systems



Hamilton's experienced Field Service Team visits your facility to provide operation installation, qualification support, service diagnostics, maintenance & calibration services, and tailored on-site training. Our on-site services ensure an effortless integration of Hamilton products with your systems. Let us take the set-up and maintenance stress out of your process.

### Key Benefits



#### Cost Savings

Save on process costs by avoiding down-times and freeing up labor.



#### Enhanced Satisfaction

We provide a high level of customer support and responsiveness to enhance satisfaction and build long-term relationships.



#### Expert Support

Get expert support from experienced and factory trained technicians.



#### On-site Service

We visit your site and work with your team and equipment.

### Hamilton Field Service Options

#### Installation Support

Installation, set-up, and calibration support directly on-site.

#### Maintenance & Calibration Services

Preventative maintenance and regular service.

#### Modular Service Contracts

Contracts tailored to your needs.

#### On-site Service Diagnostics

Diagnosing and resolution of problems on-site.

#### On-site Training

User training, and on-site training for technicians.

#### Qualification IQ/OQ

Support for the qualification of Hamilton products including documentation.



#### Request Field Services

[hamiltoncompany.com/field-services](https://hamiltoncompany.com/field-services)

pH or ORP Sensor

|                   | pH glass type | Nominal measurement range | Recomm. measurement range | Reference system | Reference electrolyte | Diaphragm type   | Recomm. min conductivity (µS/cm) | Nominal temperature range (°C) | Recomm. temperature range (°C) | Nominal pressure max. (bar) | Upside down Installation | Comments  |
|-------------------|---------------|---------------------------|---------------------------|------------------|-----------------------|------------------|----------------------------------|--------------------------------|--------------------------------|-----------------------------|--------------------------|---|
| ChemoTrode        | PHI           | 0 to 14                   | 0 to 13                   | Everef-F         | 3M KCl-LR             | HP ceramic       | 20                               | 0 to 130                       | 5 to 130                       | 6                           | No                       |   |
| ChemoTrode Bridge | PHI           | 0 to 14                   | 0 to 13                   | Everef-B         | Skylyte               | HP ceramic       | 20                               | 0 to 130                       | 5 to 130                       | 6                           | No                       |   |
| ChemoTrode P PHI  | PHI           | 0 to 14                   | 0 to 13                   | Everef-F         | Protelyt              | HP ceramic       | 20                               | 0 to 130                       | 5 to 130                       | 6                           | No                       |   |
| FermoTrode        | PHI           | 0 to 14                   | 0 to 13                   | Everef-F         | Skylyte               | Coatramic        | 20                               | 0 to 130                       | 5 to 130                       | 4                           | No                       |   |
| EasyControl       | HF            | 0 to 14                   | 0 to 13                   | Ag/AgCl          | Viscous 3M KCl        | Ceramic          | 20                               | 0 to 60                        | 0 to 60                        | 2                           | No                       |   |
| InchTrode N100F   | HF            | 0 to 14                   | 2 to 12                   | Everef-L         | Polisolve             | Single Pore ring | 5                                | -10 to 130                     | 5 to 100                       | 6                           | No                       |   |
| InchTrode N75F    | HF            | 0 to 14                   | 2 to 12                   | Everef-L         | Polisolve             | Single Pore ring | 5                                | -10 to 130                     | 5 to 100                       | 6                           | No                       |   |
| InchTrode N75FC10 | HF            | 0 to 14                   | 2 to 12                   | Everef-L         | Polisolve             | Single Pore ring | 5                                | -10 to 130                     | 5 to 100                       | 6                           | No                       |   |
| InchTrode N75P    | PHI           | 0 to 14                   | 2 to 12                   | Everef-L         | Polisolve             | Single Pore ring | 5                                | 0 to 130                       | 5 to 100                       | 6                           | No                       |   |
| InchTrode N75PC10 | PHI           | 0 to 14                   | 2 to 12                   | Everef-L         | Polisolve             | Single Pore ring | 5                                | 0 to 130                       | 5 to 100                       | 6                           | No                       |   |
| IonoTrode         | F             | 0 to 14                   | 0 to 13                   | Everef           | 3M KCl                | Sleeve           | 0.2                              | -10 to 40                      | -10 to 40                      | 0.5                         | No                       |   |
| LIQ-Glass PG      | F             | 1 to 12                   | 1 to 12                   | Everef           | 3M KCl-LR             | Ceramic          | 2                                | -5 to 60                       | -5 to 60                       | 2                           | No                       |   |
| MecoTrode         | H             | 0 to 14                   | 0 to 14                   | Everef           | Viscous 3M KCl        | HP ceramic       | 50                               | 0 to 130                       | 0 to 130                       | 6                           | No                       | 0 to 16 bar at 25 °C, 0 to 6 bar at 130 °C                      |
| Polilyte Pro      | HF            | 0 to 14                   | 2 to 12                   | Everef-B         | Polisolve             | Single Pore      | 5                                | -10 to 60                      | -5 to 60                       | 6                           | Only VP                  |   |
| Polyplast Pro     | V             | 0 to 14                   | 2 to 12                   | Ag/AgCl          | Polisolve             | Single Pore      | 50                               | -10 to 40                      | 0 to 40                        | 6                           | No                       |   |
| Polilyte Plus XP  | H             | 0 to 14                   | 2 to 12                   | Everef-L         | Polisolve Plus        | Single Pore      | 5                                | 0 to 130                       | 0 to 130                       | 16                          | Only VP                  | 0 to 50 bar (60 °C), 0 to 20 bar (100 °C), 0 to 16 bar (130 °C) |
| pH families       |               |                           |                           |                  |                       |                  |                                  |                                |                                |                             |                          |   |
| Polilyte Plus H   | H             | 0 to 14                   | 2 to 12                   | Everef-L         | Polisolve Plus        | Single Pore      | 5                                | 0 to 130                       | 0 to 130                       | 10                          | Only VP / MS             | Predecessor: Polilyte Plus, Polilyte HT                         |
| Polilyte Plus HB  | HB            | 0 to 14                   | 2 to 12                   | Everef-L         | Polisolve Plus        | Single Pore      | 5                                | 0 to 130                       | 0 to 130                       | 10                          | Only VP / MS             |   |
| Polilyte Plus HF  | HF            | 0 to 14                   | 2 to 12                   | Everef-L         | Polisolve Plus        | Single Pore      | 5                                | -10 to 100                     | -10 to 100                     | 16                          | Only VP / MS             | Predecessor: ClaryTrode   |
| Polilyte Plus PHI | PHI           | 0 to 14                   | 2 to 12                   | Everef-L         | Polisolve Plus        | Single Pore      | 5                                | 0 to 130                       | 5 to 130                       | 10                          | Only VP / MS             | Predecessor: Polyclave  |
| EasyFerm Plus PHI | PHI           | 0 to 14                   | 2 to 12                   | Everef-F         | Phermlyte             | HP Coatramic     | 100                              | 0 to 140                       | 5 to 140                       | 6                           | No                       |   |
| EasyFerm Plus HB  | HB            | 0 to 14                   | 2 to 12                   | Everef-F         | Phermlyte             | HP Coatramic     | 100                              | 0 to 140                       | 5 to 140                       | 6                           | No                       |   |
| EasyFerm Bio PHI  | PHI           | 0 to 14                   | 2 to 13                   | Everef-F         | Foodlyte              | HP Coatramic     | 100                              | 0 to 140                       | 0 to 140                       | 6                           | No                       |   |
| EasyFerm Bio HB   | HB            | 0 to 14                   | 2 to 13                   | Everef-F         | Foodlyte              | HP Coatramic     | 100                              | 0 to 140                       | 0 to 140                       | 6                           | No                       |   |

|                   | pH glass type | Nominal measurement range | Recomm. measurement range | Reference system | Reference electrolyte | Diaphragm type | Recomm. min conductivity (µS/cm) | Nominal temperature range (°C) | Recomm. temperature range (°C) | Nominal pressure max. (bar) | Upside down Installation | Comments  |
|-------------------|---------------|---------------------------|---------------------------|------------------|-----------------------|----------------|----------------------------------|--------------------------------|--------------------------------|-----------------------------|--------------------------|---|
| ChemoTrode ORP    | Platinum ring | ± 2000 mV                 | ± 2000 mV                 | Everef-F         | 3M KCl-LR             | HP ceramic     | 20                               | 0 to 130                       | 0 to 130                       | 6                           | No                       |   |
| EasyControl ORP   | Platinum wire | ± 2000 mV                 | ± 2000 mV                 | Ag/AgCl          | Gel                   | Ceramic        | 20                               | 0 to 60                        | 0 to 60                        | 2                           | No                       |   |
| OxyTrode Pt       | Platinum wire | ± 2000 mV                 | ± 2000 mV                 | Everef           | Viscous 3M KCl        | HP ceramic     | 50                               | 0 to 130                       | 0 to 130                       | 6                           | No                       |   |
| Polilyte RX       | Platinum wire | ± 2000 mV                 | ± 2000 mV                 | Everef-B         | Polisolve             | Single Pore    | 5                                | -10 to 60                      | -10 to 60                      | 6                           | No                       |   |
| Polyplast Pro RX  | Platinum wire | ± 2000 mV                 | ± 2000 mV                 | Ag/AgCl          | Polisolve             | Single Pore    | 50                               | -10 to 40                      | -10 to 40                      | 6                           | No                       |   |
| EasyFerm Plus ORP | Platinum wire | ± 2000 mV                 | ± 2000 mV                 | Everef-F         | Phermlyte             | HP Coatramic   | 100                              | 0 to 140                       | 5 to 140                       | 6                           | No                       | Arc: ± 1500 mV  |
| Polilyte Plus ORP | Platinum ring | ± 2000 mV                 | ± 2000 mV                 | Everef-L         | Polisolve Plus        | Single Pore    | 5                                | 0 to 130                       | 0 to 130                       | 10                          | Only VP                  | Arc: ± 1500 mV, 0 to 16 bar at 100 °C, 0 to 3 bar at 140 °C |



# DO Sensor

|                      | Measurement principle | Nominal measurement range (DO) | Nominal temperature range | Measurement temperature range | Nominal pressure max. (bar) | Compatible ODO Caps / Membrane Kits |
|----------------------|-----------------------|--------------------------------|---------------------------|-------------------------------|-----------------------------|-------------------------------------|
| VisiFerm RS485       | Optical               | 4 ppb to 25 ppm                | -10 to 140 °C             | -10 to 85 °C                  | 12                          | H0, H2, H3, H4                      |
| VisiFerm mA          | Optical               | 4 ppb to 25 ppm                | -10 to 140 °C             | -10 to 85 °C                  | 12                          | H3, H4                              |
| VisiTrace mA / RS485 | Optical               | 1 ppb to 2 ppm                 | -10 to 140 °C             | -10 to 85 °C                  | 12                          | L1                                  |
| VisiWater DO P Arc   | Optical               | 0 to 40 ppm                    | 0 to 60 °C                | 0 to 60 °C                    | 12                          | H20                                 |
| OxyFerm FDA          | Amperometric          | 10 ppb to 40 ppm               | 0 to 130 °C               | 0 to 130 °C                   | 4                           | FDA, CIP, standard                  |
| OxyGold B            | Amperometric          | 8 ppb to 40 ppm                | 0 to 100 °C               | 0 to 100 °C                   | 12                          | OxyGold                             |
| OxyGold G            | Amperometric          | 1 ppb to 40 ppm                | 0 to 130 °C               | 0 to 130 °C                   | 12                          | OxyGold                             |
| Oxysens              | Amperometric          | 40 ppb to 40 ppm               | 0 to 60 °C                | 0 to 60 °C                    | 4                           | none                                |

# Conductivity Sensor

|                  | Measurement principle | Nominal measurement range | Nominal temperature range | Cell constant | Nominal pressure max. (bar) | Electrodes materials available                                 |
|------------------|-----------------------|---------------------------|---------------------------|---------------|-----------------------------|--|
| Conducell 4UxF   | 4 pole contacting     | 1 µS/cm to 300 mS/cm      | -20 to 150 °C             | 0.36/cm       | 20 (135 °C)                 | Stainless steel 1.4435, Titanium, Hastelloy C 2.4602, Platinum |
| Conducell 4US    | 4 pole contacting     | 0.1 µS/cm to 500 mS/cm    | -20 to 135 °C             | 0.147/cm      | 6                           | Stainless steel 1.4435   |
| Conducell UPW    | 2 pole contacting     | 0.01 to 1500 µS/cm        | 0 to 130 °C               | < 0.1/cm      | 10                          | Stainless steel 1.4435   |
| Conducell 2DC-PG | 2 pole contacting     | 10 µS/cm to 20 mS/cm      | -5 to 80 °C               | 1/cm          | 6                           | Graphite   |

Safety First

# Hamilton Offers More Certificates Than Ever


Many industrial processes are in hazardous environments and require suitable equipment with the European ATEX, the British UKEX or the global IECEx approval. Hamilton provides safe sensors and housings since many years for these applications. In case a gas atmosphere and a dust atmosphere are or could be present at the same time, the risk of explosion must be examined carefully and special precautions may be necessary. Typical gas atmospheres can be found in oil refineries, printing industries and biogas plants. Dust atmospheres can be found in underground coalmines, woodworking areas and in all kind of mills. In the chemical industry both atmospheres can be found.

**ATEX** is the widely used synonym for the ATEX directives of the European Union. ATEX stands for the French abbreviation «ATmosphère EXplosible». The objective of ATEX is to ensure the free movement of goods throughout the European Union, by offering one harmonized compliance procedure accepted by all EU countries. This means that different national standards within the EU are obsolete. ATEX covers equipment only. Equipment for hazardous areas requires an ATEX approval when sold within the European Union.

The **UKEX** regulation applies to Great Britain and corresponds to the ATEX directive.

The **IECEx** system is a conformity assessment system of the International Electrical Commission (IEC). It is the objective of the IECEx system to facilitate international trade in equipment and services. Currently Australia, New Zealand, and Singapore accept the IECEx certificate of conformity as meeting all of the national requirements for Ex Certification. No further national certification is required. The IECEx is also accepted in many other countries.

Marking sensors or housings for ATEX / IECEx is as follows:

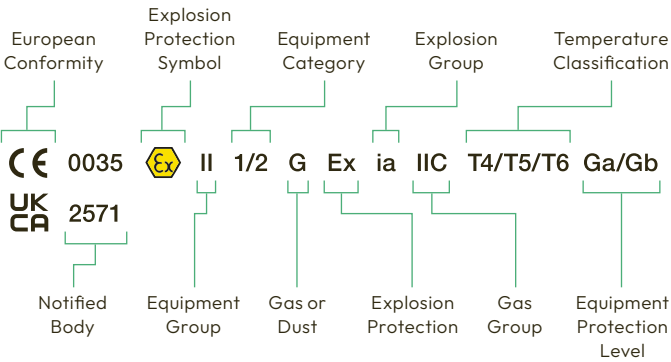

Example OxyFerm FDA

Gas: CE 0035 II 1/2 G ⚡ ia IIC T4/T5/T6 Ga/Gb  
Dust: CE 0035 II 1/2 D ⚡ ia IIIC T x °C Da/Db

The temperature value x in dust atmospheres needs to be calculated.

The table gives an overview of the approvals available for the different product lines. Detailed information about a specific product can be found on the Hamilton website their spec sheets.

|                | ATEX |      | UKEX |      | IECEx |      |
|----------------|------|------|------|------|-------|------|
| Sensor/Housing | Gas  | Dust | Gas  | Dust | Gas   | Dust |
| Analog Sensors | ✓    | ✓    | ✓    | ✓    | ✓     | ✓    |
| Housings       | ✓    | ✓    | ✓    | ✓    | ✓     | ✓    |
| Arc            | -    | -    | -    | -    | -     | -    |
| Memosens       | ✓    | -    | ✓    | -    | ✓     | -    |
| VisiFerm mA    | ✓    | ✓    | ✓    | ✓    | ✓     | ✓    |
| VisiTrace mA   | ✓    | ✓    | ✓    | ✓    | ✓     | ✓    |

# Alphabetical Index

## A

|                           |  |
|---------------------------|--|
| Arc                       | 4, 5, 7, 12, 13, 15, 19, 21, 23, 25, 27, 41, 43, 56, 57, 59, 62, 63, 69, 70, 71, 72, 73, 74, 75, 79, 83, 85, 87, 89, 91, 93, 95, 99, 104, 105, 111, 112, 113, 114, 115, 116, 134, 138, 166, 168, 169 |
| Arc Accessories           | 115  |
| Arc ECS Adapter           | 15, 113  |
| Arc Modbus OPC Converter  | 7, 70, 114, 116  |
| Arc Module Cond-P SU      | 59   |
| Arc Module Incyte-P SU    | 72, 73   |
| Arc Systems               | 15   |
| Arc View Mobile           | 15, 115  |
| Arc Wi 1G Adapter BT      | 70, 115  |
| Arc Wi 2G Adapter BT      | 70, 114, 115   |
| Autoclavation Cap OxyFerm | 102  |

## B

|            |     |
|------------|-----|
| blind plug | 129 |
| Bluetooth  | 90  |

## C

|                        |  |
|------------------------|--|
| Cables                 | 106  |
| Calibration Station    | 79, 83, 87, 89, 91   |
| Cell Density           | 4, 5, 69, 70, 72, 74   |
| ChemoTrode             | 14, 28, 29, 44, 45, 154, 166                                       |
| ChemoTrode Bridge      | 166  |
| ChemoTrode ORP         | 44, 45, 166  |
| ChemoTrode P           | 29, 166  |
| Cleaning Solution Set  | 103  |
| Co2ntrol               | 6  |
| Conducell 2DC-PG       | 64, 65, 168  |
| Conducell 4US          | 60, 61, 168  |
| Conducell 4USF         | 57   |
| Conducell 4UxF         | 56, 57, 111, 157, 168  |
| Conducell SU           | 5, 58  |
| Conducell UPW          | 62, 63, 111, 157, 168  |
| conductivity           | 5, 8, 10, 18, 34, 36, 40, 48, 50, 55, 56, 58, 59, 60, 66, 156, 166 |
| conductivity standards | 10, 55, 66   |
| Customized Products    | 117  |

## D

|                    |            |
|--------------------|------------|
| DCO2               | 6, 77, 78  |
| Dencytee Arc       | 4, 74      |
| Dissolved Oxygen   | 5, 11, 106 |
| DO Adapter         | 131        |
| DuraCal pH buffers | 10         |

## E

|                   |   |
|-------------------|---|
| EasyControl       | 36, 37, 50, 51, 166   |
| EasyControl ORP   | 50, 51, 166   |
| EasyFerm Bio      | 15, 20, 21, 166   |
| EasyFerm Plus     | 14, 15, 22, 23, 42, 43, 166   |
| EasyFerm Plus ORP | 42, 43, 166   |
| electrolyte       | 8, 9, 20, 30, 34, 36, 37, 42, 44, 48, 50, 51, 78, 81, 92, 102, 154, 166 |

## F

|                 |                            |
|-----------------|----------------------------|
| FermoTrode      | 166                        |
| fix cable       | 31, 61, 65, 93, 115        |
| FlexiFit        | 14, 15, 124, 126, 127, 128 |
| FlexiFit Bio    | 14, 15, 126, 127, 128      |
| FlexiFit TC     | 14, 127                    |
| FlexiFit U Bio  | 127                        |
| FlexiFit VV-O   | 127                        |
| FlexiFit VV-15  | 127                        |
| FlexiFlow SL 10 | 160, 161                   |
| Flow Cell       | 158, 159                   |
| Foodlyte        | 8, 20, 21, 166             |

## H

|                              |              |
|------------------------------|--------------|
| H100 Cond                    | 119          |
| H100 DO                      | 14, 119      |
| H100 pH                      | 14, 119      |
| H220X                        | 14, 120, 121 |
| Hamilton customized products | 117          |
| Housings                     | 123          |
| HyCIP                        | 140, 141     |

## I

|                |                              |
|----------------|------------------------------|
| InchTrode      | 30, 31, 166                  |
| Incyte Arc     | 4, 69, 70, 71, 74            |
| Incyte SU      | 5, 72                        |
| insertion tube | 142, 144, 146, 148, 150, 152 |
| IonoTrode      | 166                          |

## J

|              |            |
|--------------|------------|
| Junction Box | 87, 91, 93 |
|--------------|------------|

## K

|    |                      |
|----|----------------------|
| K8 | 21, 23, 27, 106, 109 |
|----|----------------------|

## L

|              |        |
|--------------|--------|
| Liq-Glass PG | 36, 37 |
|--------------|--------|

## M

|                           |                                     |
|---------------------------|-------------------------------------|
| M12                       | 106, 111, 112, 114                  |
| MasterFit                 | 125, 154, 155                       |
| MecoTrode                 | 24, 25, 47, 166                     |
| Membrane Kit CIP          | 102                                 |
| Membrane Kit FDA          | 102                                 |
| Memosens                  | 19, 21, 23, 104, 106, 110, 121, 169 |
| Modbus Profibus Converter | 116                                 |

## O

|            |   |
|------------|---|
| ODO Cap H3 | 82, 83, 87  |
| ODO Cap H4 | 82, 83, 87  |
| ODO Cap S2 | 85  |
| ODO Cap S3 | 85  |
| OneFerm pH | 5, 26, 27   |
| ORP        | 8, 13, 15, 36, 39, 40, 41, 42, 43, 44, 45, 46, 47, 48, 49, 50, 51, 53, 104, 105, 106, 111, 113, 120, 121, 166 |

|                      |   |
|----------------------|---|
| ORP Buffers          | 53  |
| OxyFerm              | 14, 102, 103, 106, 109, 110, 111, 157, 168, 169 |
| OxyFerm FDA          | 14, 102, 106, 111, 168, 169                     |
| OxyFerm Membrane Kit | 102   |
| Oxygen Accessories   | 102   |
| OxyGold B            | 102, 168  |
| OxyGold G            | 102, 168  |
| OxyGold Membrane Kit | 102   |
| Oxylyte              | 102, 103  |
| Oxylyte B            | 103   |
| Oxylyte G            | 103   |
| Oxysens              | 168   |
| OxyTrode Pt          | 46, 47, 166                                     |

## P

|                       |   |
|-----------------------|---|
| pH                    | 5, 8, 9, 10, 13, 14, 15, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 31, 32, 33, 34, 35, 36, 37, 52, 53, 69, 73, 77, 103, 104, 105, 106, 108, 109, 111, 113, 118, 119, 120, 121, 131, 154, 156, 157, 160, 166 |
| pH Buffers            | 10, 52, 53  |
| Phermlyte             | 23, 42, 43, 166   |
| pH glasses            | 8   |
| pipe-mount kit        | 118   |
| Polarization Module   | 102   |
| Polarization Module B | 102   |
| Polarization Module G | 102   |
| Polarization Module T | 102   |
| Polilyte Plus         | 9, 14, 18, 19, 40, 41, 166  |
| Polilyte Plus ORP     | 40, 41, 166   |
| Polilyte Plus XP      | 18, 19, 166   |
| Polilyte Pro          | 34, 35, 49, 166   |
| Polilyte RX           | 48, 49, 166   |
| Polisolve             | 9, 19, 30, 31, 34, 35, 41, 48, 49, 166  |

|                  |                     |
|------------------|---------------------|
| Polisolve Plus   | 9, 19, 41, 166      |
| Polyplast Pro    | 34, 35, 48, 49, 166 |
| Polyplast Pro RX | 48, 49, 166         |
| Power Cable M12  | 112, 114            |
| Pressure Adapter | 155                 |
| protective hood  | 118                 |
| Protelyte        | 103                 |
| PTFE Scraper     | 142, 144            |

## R

|                                    |  |
|------------------------------------|--|
| Replacement Cathode OxyFerm        | 102  |
| Replacement Cathode OxyGold B      | 102  |
| Replacement Cathode OxyGold G      | 102  |
| Replacement Kit Seal Pusher        | 131, 133   |
| Retractable                        | 79, 83, 87, 89, 91, 124, 138, 140, 141, 142, 143, 144, 145, 146, 147, 148, 149, 150, 151, 152, 153 |
|                                    | 140, 141   |
| Retractable B                      | 142, 143, 144, 145   |
| Retractable BC                     | 145  |
| Retractable BC Plastic             | 145  |
| Retractable BC Plastic M (manual)  | 145  |
| Retractable BC Plastic (pneumatic) | 145  |
| Retractable BC Steel               | 143  |

|                                  |  |
|----------------------------------|--|
| Retractable BC Steel M (manual)  | 143                                    |
| Retractable BC Steel (pneumatic) | 143                                    |
| Retractable B M (manual)         | 141                                    |
| Retractable B (pneumatic)        | 141                                    |
| Retractable C                    | 146, 147, 148, 149, 150, 151, 152, 153 |

|                                      |                              |
|--------------------------------------|------------------------------|
| Retractable C Plastic                | 148, 149, 152, 153           |
| Retractable C Plastic LT M (manual)  | 153                          |
| Retractable C Plastic LT (pneumatic) | 153                          |
| Retractable C Plastic M (manual)     | 149                          |
| Retractable C Plastic (pneumatic)    | 149                          |
| Retractable C Steel                  | 146, 147, 150, 151           |
| Retractable C Steel LT               | 150, 151                     |
| Retractable C Steel LT M (manual)    | 151                          |
| Retractable C Steel LT (pneumatic)   | 151                          |
| Retractable C Steel M (manual)       | 147                          |
| Retractable C Steel (pneumatic)      | 147                          |
| RetractoFit                          | 124, 132, 134, 135, 136, 137 |
| RetractoFit Bio                      | 136, 137                     |
| RetractoFit Bio 25                   | 137                          |
| RetractoFit Bio 55                   | 137                          |
| RetractoFit PEEK 25                  | 135                          |
| RetractoMaster                       | 14                           |

## S

|                          |   |
|--------------------------|---|
| S7                       | 29, 45, 106, 108, 109                           |
| S8                       | 19, 21, 23, 25, 35, 37, 41, 43, 47, 49, 51, 106 |
| Safety Socket            | 128   |
| Service Kit FlexiFit Bio | 127   |
| Service Kit RetractoFit  | 135, 137  |
| Single Pore              | 9, 19, 30, 31, 34, 35, 40, 41, 48, 49, 166      |

|                      |          |
|----------------------|----------|
| Skylyte              | 103, 166 |
| Storage Solution     | 103      |
| System installations | 14       |

## T


|             |                           |
|-------------|---------------------------|
| T82/D4      | 83, 85, 109, 110, 113     |
| transmitter | 12, 62, 74, 102, 113, 118 |
| Triclamp    | 57, 127, 157              |

## V

|                 |  |
|-----------------|--|
| VariVent        | 127  |
| VisiFerm DO     | 5, 11, 111   |
| VisiFerm DO SU  | 5  |
| VisiFerm mA     | 86, 87, 104, 112, 134, 168, 169                    |
| VisiFerm RS485  | 82, 83, 111, 113, 168                              |
| VisiTrace mA    | 90, 91, 104, 112, 134, 168, 169                    |
| VisiTrace RS485 | 88, 89   |
| VisiWater DO P  | 92, 93, 168  |
| VP              | 19, 21, 23, 25, 29, 31, 35, 57, 102, 106, 107, 166 |
| VP6             | 25, 27, 29, 31, 35, 41, 57, 63, 110                |
| VP8             | 111, 112, 113, 114                                 |

## W

|                 |     |
|-----------------|-----|
| weld-in sockets | 128 |
|-----------------|-----|

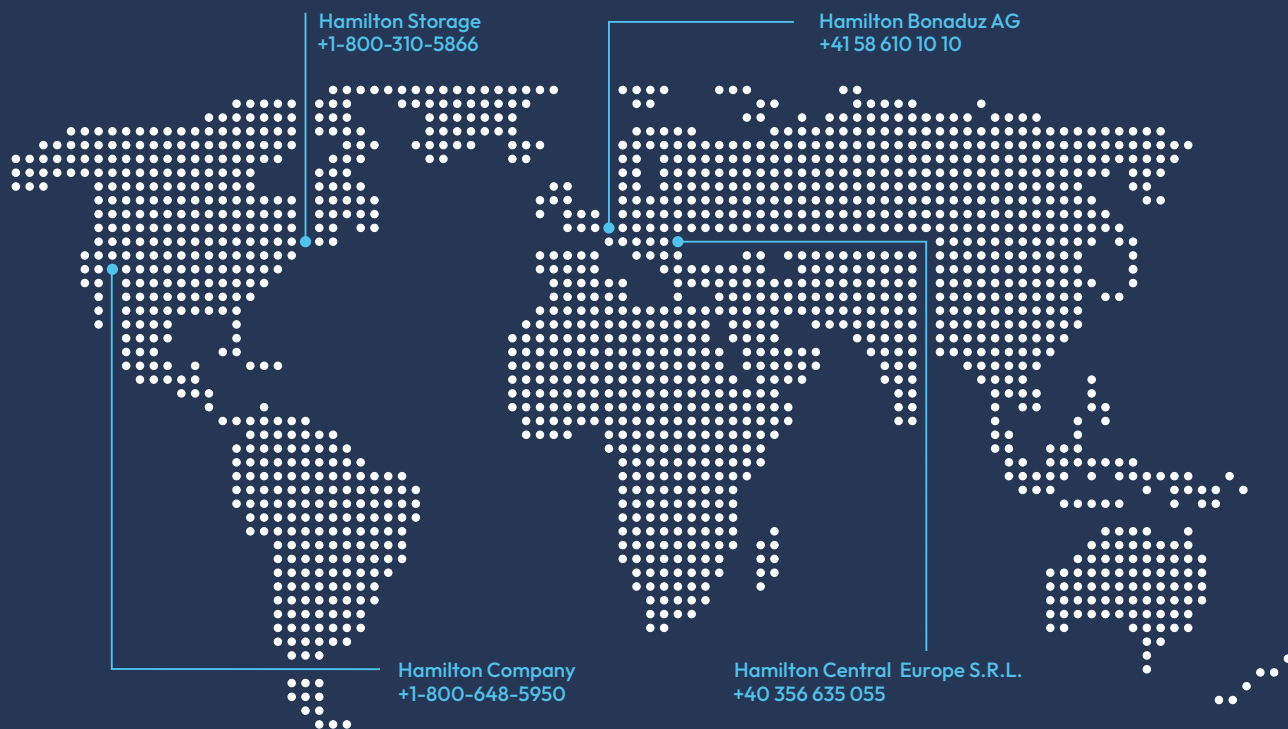

● Headquarters / Manufacturing



Years of Experience  
**75+**



Locations Worldwide  
**22+**



Employees Internationally  
**3,000+**

To find a representative in your area,  
please visit:

[hamiltoncompany.com/contact](https://hamiltoncompany.com/contact)

**Hamilton Americas & Pacific Rim**  
Hamilton Company Inc.  
4970 Energy Way  
Reno, Nevada 89502 USA  
Tel: +1-775-858-3000  
Fax: +1-775-856-7259  
[sales@hamiltoncompany.com](mailto:sales@hamiltoncompany.com)

**Hamilton Europe, Asia, Africa**  
Hamilton Bonaduz AG  
Via Crusch 8  
CH-7402 Bonaduz, Switzerland  
Tel: +41-58-610-10-10  
[contact.pa.ch@hamilton.ch](mailto:contact.pa.ch@hamilton.ch)



Bluetooth® is a registered trademark of Bluetooth SIG Inc., Kirkland WA, USA. Memosens® is a registered trademark of Endress + Hauser, Reinach (D).  
Tuchenhagen Varivent® is a registered trademark of GEA Tuchenhagen GmbH. Unigate® is a registered trademark of Deutschmann Automation GmbH & Co. KG, Bad Camberg (D).  
App Store, iOS, and their logos are registered trademarks of Apple Inc. in the US and other countries. Android, Google Play, and their logos are registered trademarks of Google Inc. in the US and/or other countries.  
Windows and their logos are registered trademarks of Microsoft Corporation in the US and other countries. All other trademarks are owned and/or registered by Hamilton Bonaduz AG.