


| | |
|---------------|--|
| FOR | COMPACT TYPE LEVEL TRANSMITTER (Rod Probe W/ Ground Tube) |
| MOUNTING | TOP, SCREW |
| ENCLOSURE | WEATHER PROOF (IP65) |
| AMBIENT TEMP. | -20 ~ +60°C |
| MAX. PRESSURE | 20 kgf/cm ² |
| MAX. TEMP | 80 °C |

| | |
|-------------|---|
| CABLE ENTRY | PF 3/4"(F) (STD.) |
| | <input checked="" type="checkbox"/> 2-PF 1/2"(F) |

| | |
|------------------|---------------------------|
| ELECTRICAL SPEC. | POWER SUPPLY : DC 24V |
| | OUTPUT SIGNAL : DC 4~20mA |

| NO. | DESCRIPTION | MATERIAL | REMARK |
|-----|---------------|----------|--------|
| 1 | HOUSING | ALC | |
| 2 | PROCESS CONN. | 316L SS | |
| 3 | INSULATION | TEFLON | 1t |
| 4 | SENSING ROD | 316L SS | φ12.7 |
| 5 | GROUND TUBE | 316L SS | φ27.2 |

| |
|--|
| PROCESS CONN. SIZE |
| <input checked="" type="checkbox"/> PT 1"(M) SCREW |
| <input type="checkbox"/> |

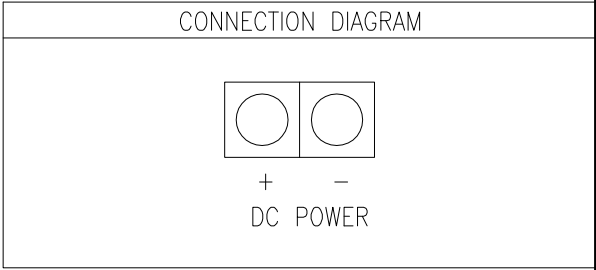

| TAG. NO. | Q'TY | L |
|----------|------|-------|
| | 1 | 1,000 |
| | | |
| | | |
| | | |

NOTE
1. GENERAL DIMENSION TOLERANCE ±3mm
EXCEPT AS NOTED.

| | | | | | | | | |
|-----|------------------------------------|-----------|----------|----------|----------|----------------|------|-----------|
| | HITROL CO., LTD. | | | | | SCALE | UNIT | SHEET NO. |
| | TITLE | | | | | N.S | mm | / |
| | CAPACITANCE TYPE LEVEL TRANSMITTER | | | | | PROJECT | | |
| | HT-100CT-2 | | | | | DRAWING NO. | | |
| | | | | | | HT100CT2-BA-01 | | |
| NO. | DATE | REVISION | REV'D BY | CHK'D BY | APP'D BY | | | |
| | JAN. 2017 | 1ST ISSUE | S W JUNG | J H CHOI | B S SUNG | | | |

This drawing is the property of HITROL and shall not be copied, communicated, or given for third-party except with our written permission.