


MS-228-3

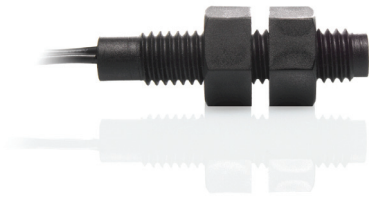

MS-228-3

Reed Sensor M8 thread

Electrical Characteristics		@ 25 °C
Contact form		A
Contact rating max.	W / VA	10
Switching voltage max.	VDC	200
	VAC	140
Switching current max.	A	1
Carry current max.	A	1.2
Breakdown voltage min.	VDC	240
Total resistance max. (initial)	mΩ	200
Insulation resistance min.	Ω	10 ¹⁰

Features
➤ Adjustable switching point
➤ Various sensitivity ranges available
➤ Customized types available


Magnetical Characteristics (of unmodified Reed Switch)		@ 25 °C
Pull in range available	AT	10 - 25
Drop out min.	AT	5
Test coil	TC -	014
Test equipment tolerance	± AT	2

Approvals

Operating Characteristics (of unmodified Reed Switch)		@ 25 °C
Switching frequency max.	Hz	500
Resonant frequency typ.	Hz	4000
Operate time max. (incl. bounce)	ms	1
Release time max.	ms	0.4

Environmental Characteristics		
Operating temperature	°C	-20 to + 85
Vibration (50-2000 Hz)	g	20
Shock (1/2 sin 11 ms)	g	100

© PIC GmbH

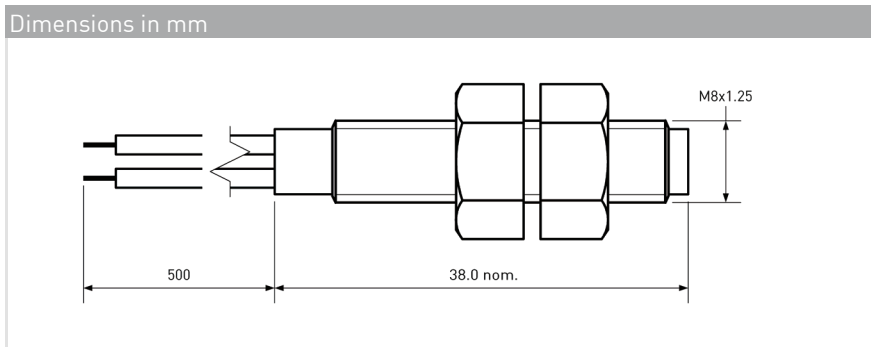

Ordering Information	
Packing Unit	50 pcs
Weight per piece	7 g
Weight per package	365 g
Standard AT Ranges	
	1= 10 to 15 AT
	2= 15 to 20 AT
	3= 20 to 25 AT
Ordering Example	
MS-228-3-2 describes MS-228-3 with 15 to 20 AT.	

MS-228-3





MS-228-3

Reed Sensor M8 thread

Material Information

	Material	Colour
Housing	PA6, 30%GF, with M8 thread	black
Cable	UL 1007/1569, AWG 24, 4 mm stripped and tinned	black
Potting compound	Epoxy	black
Nuts	PA6, M8, separately packed	black

Test Procedure of final Reed Sensor

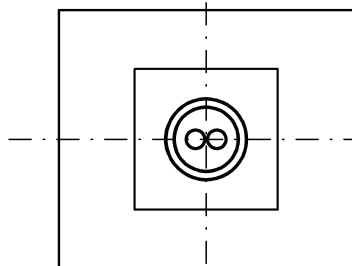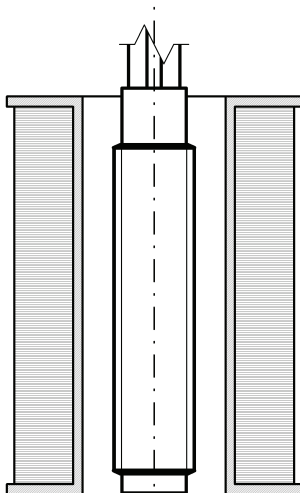

Test Coil placed in vertical position

Reed Sensor centered in Test Coil

Measured without nuts

Test Parameters

Test coil	TC-324
Test programs	
AT range	Test program
1 =	MS-228-3-1
2 =	MS-228-3-2
3 =	MS-228-3-3

Remarks

When mounted onto ferromagnetic parts switching distance of MS-228-3 may reduce.
Electromagnetical influences and magnetic fields may change the switching behaviour of the sensor.

Matching actuator MSM-228 available as well.