

Cable Connectors

Size of bushing: Size 3

Environmental conditions: INDOOR

Voltage tap: No

Voltages [kV]: U_0 (phase-ground): 2.4KV


Application: Indoor

Installation position:

Cable design: Single core

U_n (phase-phase): 4.16 KV U_m (max. U_{operat} $2 \times U_0$): _____

Cable Design

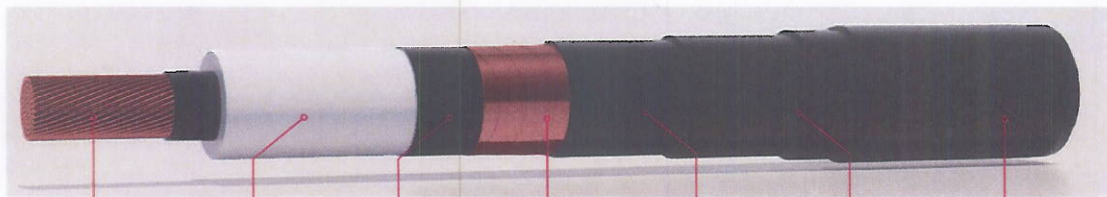

Conductor

Isolation

Conductive Layer

Cable Screen

1. Armouring

2. Armouring

Outer Sheath

Diameter [mm]: 13.0048 19.7866 _____ 25.8026

Cross section [mm²]: _____

Thickness [mm]: _____

Selection: RM (stranded circular)

~~XLPE~~
EPR

Easy strip

Tape

Without armor

Without armor

PE

Copper

With FOC

With FOC

With inner sheath

Ground flexes

With inner sheath

Save Form

Reset Form

Remark: _____