


Short circuit protected proximity switch with 4-wire connection.

PNP normally open / normally close output and Proxi-Teach function.

The sensor recognises the existing installation conditions after the key is pressed, and adjusts the operating distance optimally.

Teach-in
Funktion

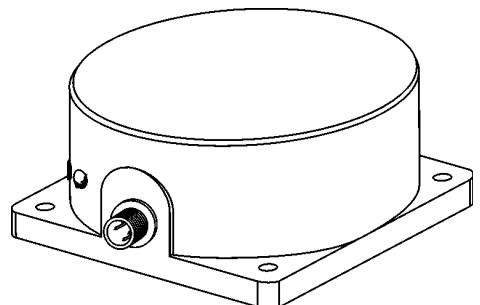

Technical Data

Type	IKN 070T.38 GS4
Art.-No.	2049T
Rated operating distance (S_n)	70 mm
Output	PNP n. o. + n. c.
Operating distance adjustable	Teach In*
Target steel St37, 1mm thick	210 x 210 mm
Location at metal	Non flush
Supply voltage (U_B)	10 - 55 V DC
Ripple voltage	max 15 %
Load current max.	0 - 400 mA
Short-time load current	2 A / 10 ms 0,8 A / 100 ms
Short circuit protection	yes, pulsing
Voltage drop (U_d)	< 2 V
No-load current (I_0)	< 10 mA
Switching frequency (f)	50 Hz
Switching hysteresis (H)	1 - 15 %
Ambient temperature	-25 ... +70 °C
Protection class	IP 67**
MTTF (years)	1276
Connection	plug S4
Function display	LED
Housing material	Plastic PBT

*The teach-in function enables usage under non-standard conditions such as, for example, partly flush installation. For further setting information see PIA002

**The protection class is complied with when the protection screw for the adjusting device is screwed in.

Diagram of Connections

